SIGN DETAIL
1:100

10

SIGN I.D.

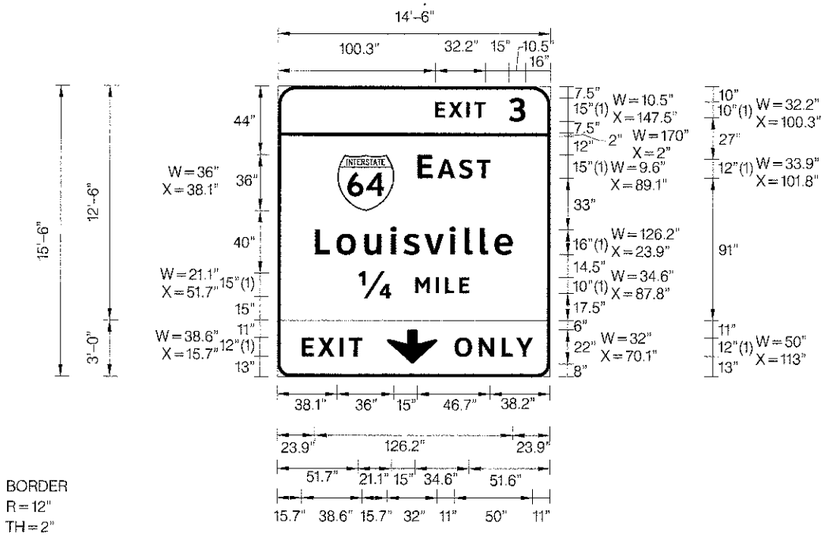

SIGN NUMBER	8S082I070R002.2
WIDTH x HGHT.	14'-6" x 15'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: ZZ Retro Reflective
	COLOR: Color 24 / Color 9
LEGEND/BORDER	TYPE: ZZ Retro Reflective
	COLOR: Color 100 /Color 218 /Color 100

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	38.1	70	36	36
ARDOWN	0	70	8	32	22

Panel Style: guide_fwy_overhead_2009_exit.ssi
Dimensions are in inches.tenths

FONT:
(1) ClearviewHwy-5-W
M.U.T.C.D.: 2009 Edition

BORDER
R=12"
TH=2"

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

										LENGTH	SERIES/SIZE
E	X	I	T	3							ClearviewHwy-5-W
100.3	108.9	120.3	125.3	147.5						57.7	10,15
E	A	S	T								ClearviewHwy-5-W
89.1	101.8	115.6	127.1							46.7	15,12
L	o	u	i	s	v	i	l	l	e		ClearviewHwy-5-W
23.9	37.6	55.4	72.1	80.3	93.7	109.8	119.2	129.1	138.4	126.2	16/13
1/4	M	I	L	E							ClearviewHwy-5-W
51.7	87.8	101	106.9	116						70.7	15,10
E	X	I	T								ClearviewHwy-5-W
15.7	26	39.7	45.7							38.6	12
O	N	L	Y								ClearviewHwy-5-W
113	128.4	143.1	152.4							50	12

Kaskaskia Engineering Group, LLC

USER NAME = $USER$	DESIGNED - SMS	REVISED -	
FILE NAME = $FILE$	DRAWN - RJO	REVISED -	
PLOT SCALE = $SCALE$	CHECKED - LDC	REVISED -	
PLOT DATE = $DATE$	DATE - 06/29/12	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
I-70 CONNECTION

SIGN PANEL DETAILS

SCALE: | SHEET NO. 10 OF 14 SHEETS | STA. | TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
998	82-1R	ST. CLAIR	294	175

CONTRACT NO. 76C43

FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT