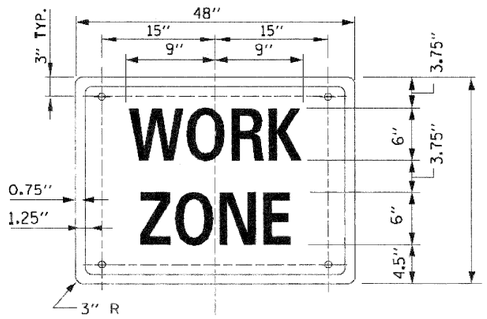

SIGN G20-I102 (0)

COLOR: BACKGROUND - FLUORESCENT ORANGE (0)
BORDER AND LETTERS - BLACK
SIZE: 48"x24"
LETTERING: 6" FEDERAL SERIES C,
MOUNTING HOLES: 7/16" DIA., 4 HOLES SPACED AS SHOWN ON SIGN G20-2A

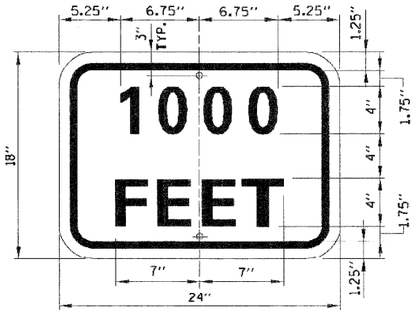

SUPPLEMENTAL PLATE (0)

COLOR: BACKGROUND - FLUORESCENT ORANGE (0)
BORDER AND LETTTERS - BLACK
SIZE: 24"x18"
LETTERING: 4" FEDERAL SERIES D
MOUNTING HOLES: 7/16" DIA.

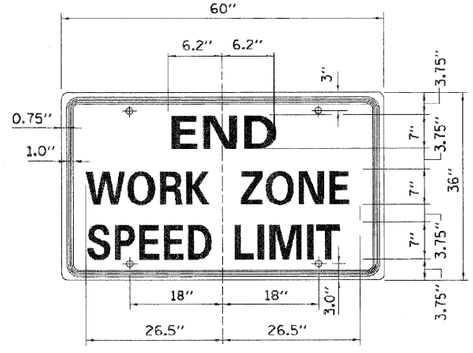

SIGN G20-I103 (0)

COLOR: BACKGROUND - FLUORESCENT ORANGE (0)
BORDER AND LETTERS - BLACK
SIZE: 60"x36"
LETTERING: 6" FEDERAL SERIES C,
MOUNTING HOLES: 7/16" DIA., 4 HOLES SPACED AS SHOWN

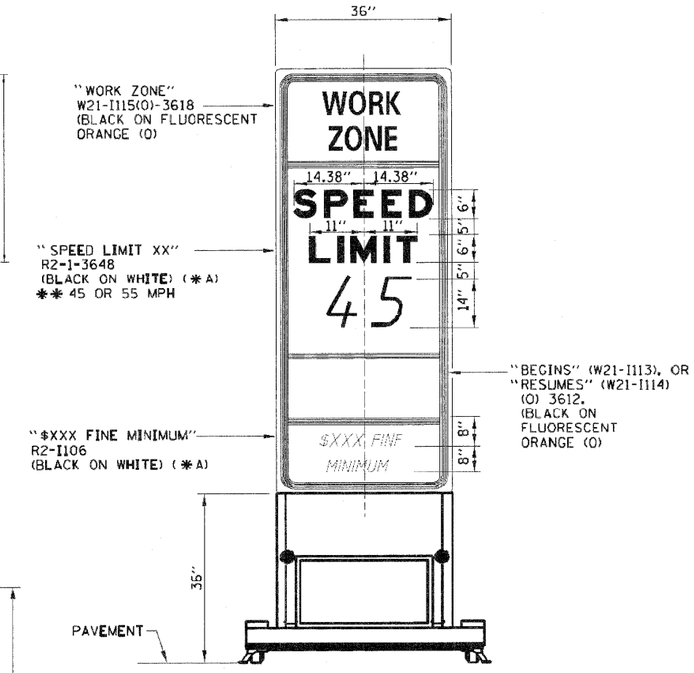

WORK ZONE SPEED LIMIT SIGN ASSEMBLY

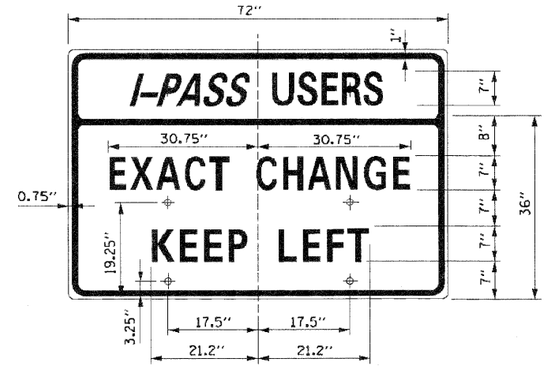

SIGN TS-7

COLOR: BACKGROUND - WHITE (REFLECTORIZED) (* A)
BORDER AND LETTTERS - BLACK
SIZE: 72"x36"
LETTERING: 7" FEDERAL SERIES C
MOUNTING HOLES: 7/16" DIA., 4 HOLES SPACED AS SHOWN

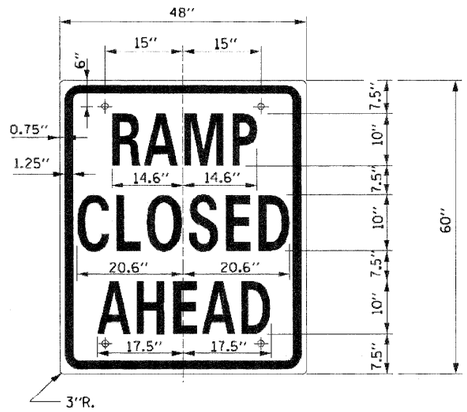

SIGN TS-9

COLOR: BACKGROUND - WHITE (REFLECTURIZED)
BORDER AND LETTTERS - BLACK
SIZE: 48"x60"
LETTERING: 10" FEDERAL SERIES C
MOUNTING HOLES: 7/16" DIA., 4 HOLES SPACED AS SHOWN

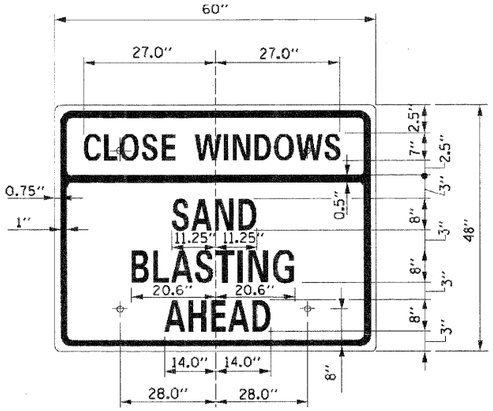

SIGN TS-10 (0)

COLOR: BACKGROUND - FLUORESCENT ORANGE (0)
BORDER AND LETTTERS - BLACK
SIZE: 60"x48"
LETTERING: 8" FEDERAL SERIES C, 7" FEDERAL SERIES B
MOUNTING HOLES: 7/16" DIA., 4 HOLES SPACED AS SHOWN

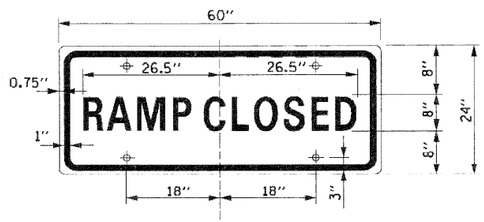

SIGN TS-6

COLOR: BACKGROUND - WHITE (REFLECTURIZED)
BORDER AND LETTTERS - BLACK
SIZE: 60"x24"
LETTERING: 8" FEDERAL SERIES C
MOUNTING HOLES: 7/16" DIA., 4 HOLES SPACED AS SHOWN

GENERAL NOTES:

1. ALL LETTERING IS DESIGNATED BY SIZE AND SERIES IN ACCORDANCE WITH THE LATEST EDITION OF "STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS" AS PUBLISHED BY THE U.S. DEPARTMENT OF TRANSPORTATION. LETTERING SPACING SHALL BE IN ACCORDANCE WITH THE GUIDE EXCEPT WHERE NOTED.
2. SYMBOLS AND ARROWS SHALL CONFORM TO THE DETAILS SHOWN IN THE LATEST EDITION OF "STANDARD HIGHWAY SIGNS" AS PUBLISHED BY THE U.S. DEPARTMENT OF TRANSPORTATION.
3. SEE THE CONTRACT REQUIREMENTS FOR ADDITIONAL NOTES AND SPECIFICATIONS.
(0) FLUORESCENT ORANGE REFLECTIVE SHEETING PER THE STANDARD SPECIFICATIONS.
(* A)-REFLECTIVE SHEETING PER THE STANDARD SPECIFICATIONS.

SHEET 2 OF 2

Paul Kovacs
APPROVED ..... CHIEF ENGINEER
DATE 5-1-2009

Illinois Tollway
Open Roads for a Faster Future

CONSTRUCTION SIGNS

STANDARD E1-02

FILE NAME = 62099STD02.dgn	USER NAME = halsted	DESIGNED - PK	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	ILLINOIS RTE 1 OVER TRI-STATE I-80 / I-294 STANDARD E1-02 CONSTRUCTION SIGNS			F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN - GAP	REVISED -					876	2001-001BR	COOK	62	59
	PLOT SCALE = 50.0000 ' / IN.	CHECKED - RPI	REVISED -							CONTRACT NO. 62099		
	PLOT DATE = 6/28/2011	DATE - 07/01/2011	REVISED -		SCALE: NONE	SHEET NO. OF SHEETS	STA. TO STA.	FED. ROAD DIST. NO. 1	ILLINOIS	FED. AID PROJECT		