

STAGE 2

GENERAL NOTES:


1. SEE IDOT STANDARD 701321, LANE CLOSURE, 2L, 2W, BRIDGE REPAIR WITH BARRIER FOR ADDITIONAL INFORMATION.
2. SEE MOT TYPICAL SECTIONS FOR ADDITIONAL INFORMATION.
3. TYPE C MARKERS FOR TEMPORARY BARRIER WALL WILL NOT BE MEASURED SEPARATELY FOR PAYMENT BUT SHALL BE CONSIDERED INCLUDED IN THE UNIT COST OF TEMPORARY BARRIER WALL.

STAGING PLAN NOTES:

- ① TYPE III BARRICADE TO BE PLACED WHEN NO WORK IS BEING PERFORMED.
- ② BARRIER WALL/GUARDRAIL MARKERS AT 25' cts. SEE STANDARDS 704001 & 635011.
- ③ WHEN TEMP. BRIDGE RAIL IS SPECIFIED, IT SHALL BE CONNECTED TO THE TEMP. CONC. BARRIER USING TRAFFIC BARRIER TERMINAL TYPE II.

LEGEND

- WORK ZONE
- TYPE III BARRICADE WITH FLASHING LIGHT
- DETECTOR LOOPS
- IMPACT ATTENUATOR
- HMA BASE COURSE WIDENING / HMA SHLDR - STAGE 1
- TEMPORARY PAVEMENT
- SIGN (WORK ZONE)
- DRUM WITH STEADY BURN LIGHT OR BARRICADE
- TEMPORARY CONCRETE BARRIER
- DOUBLE VERTICAL PANEL
- CRYSTAL BIDIRECTIONAL BARRIER WALL / GUARDRAIL MARKER
- TEMPORARY TRAFFIC SIGNAL
- PERMANENT PAVEMENT MARKING REMOVAL

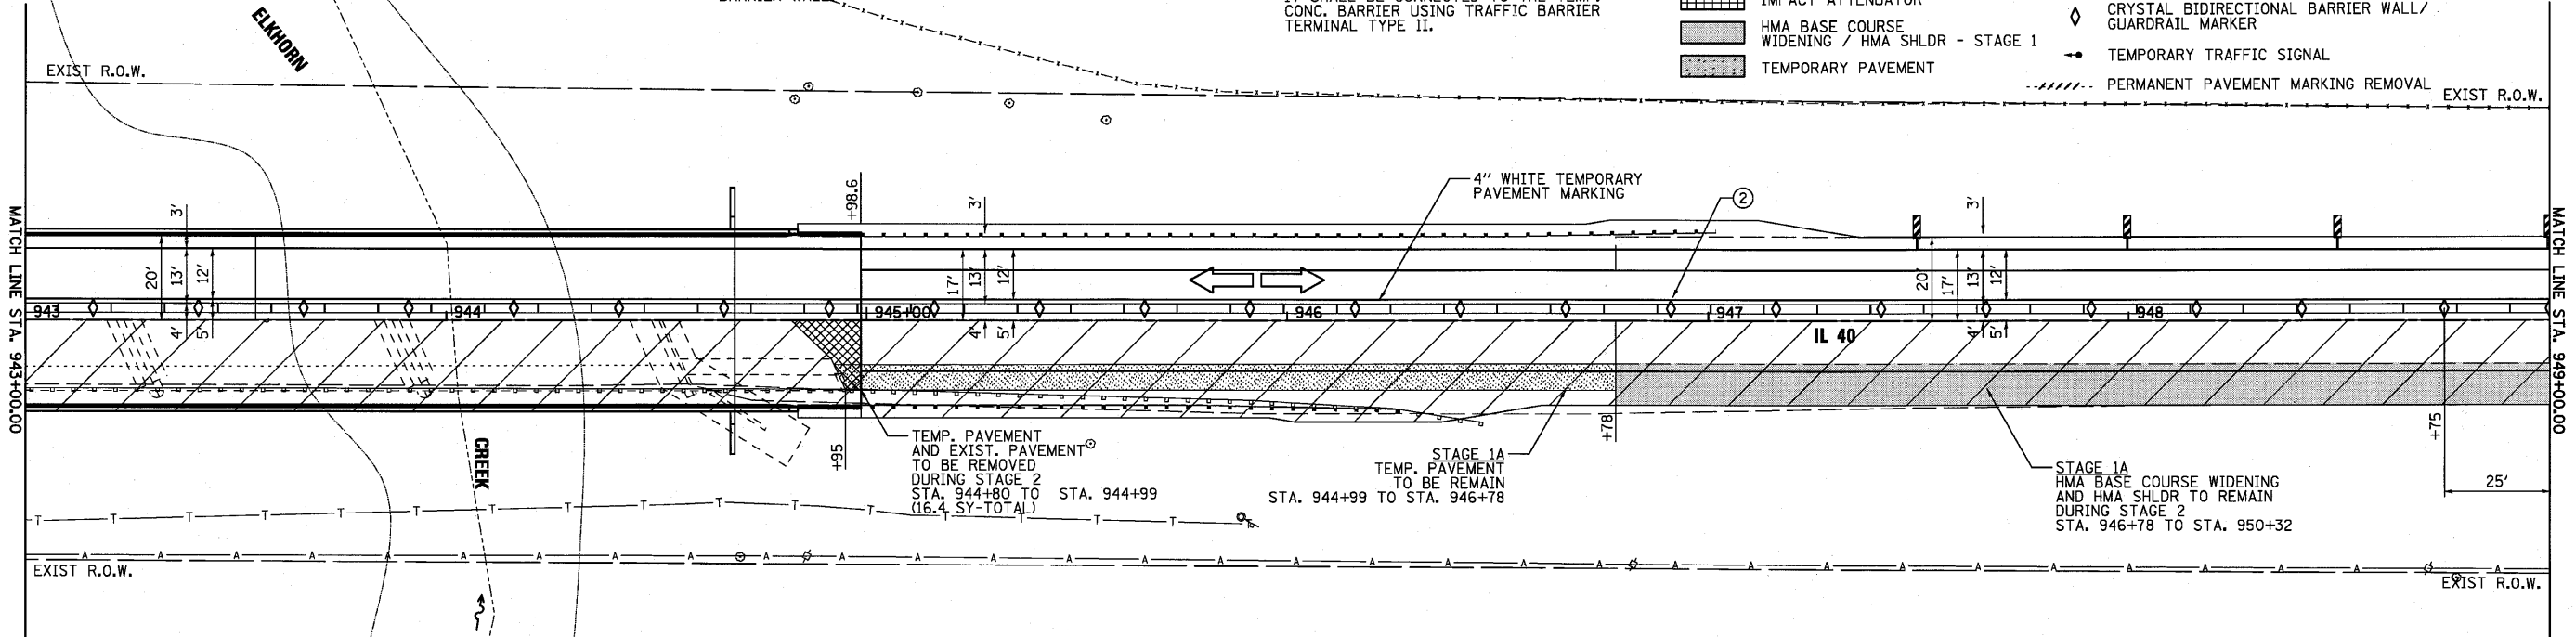

STAGE 2

ONE WAY TRAFFIC FOLLOW TRAFFIC FLOW

STA. 950+79, 10' LT (FACING DRIVEWAY)



STOP HERE ON RED
TO ACTIVATE SIGNALS

W3-3(O)-48
STA. 956+70

ONE LANE ROAD AHEAD
40 MPH
W13-1(O)-2424
STA. 961+70

11'-6"
W12-1102(O)-48
STA. 966+70

ROAD CONSTRUCTION AHEAD
W20-1103(O)-48
STA. 971+70

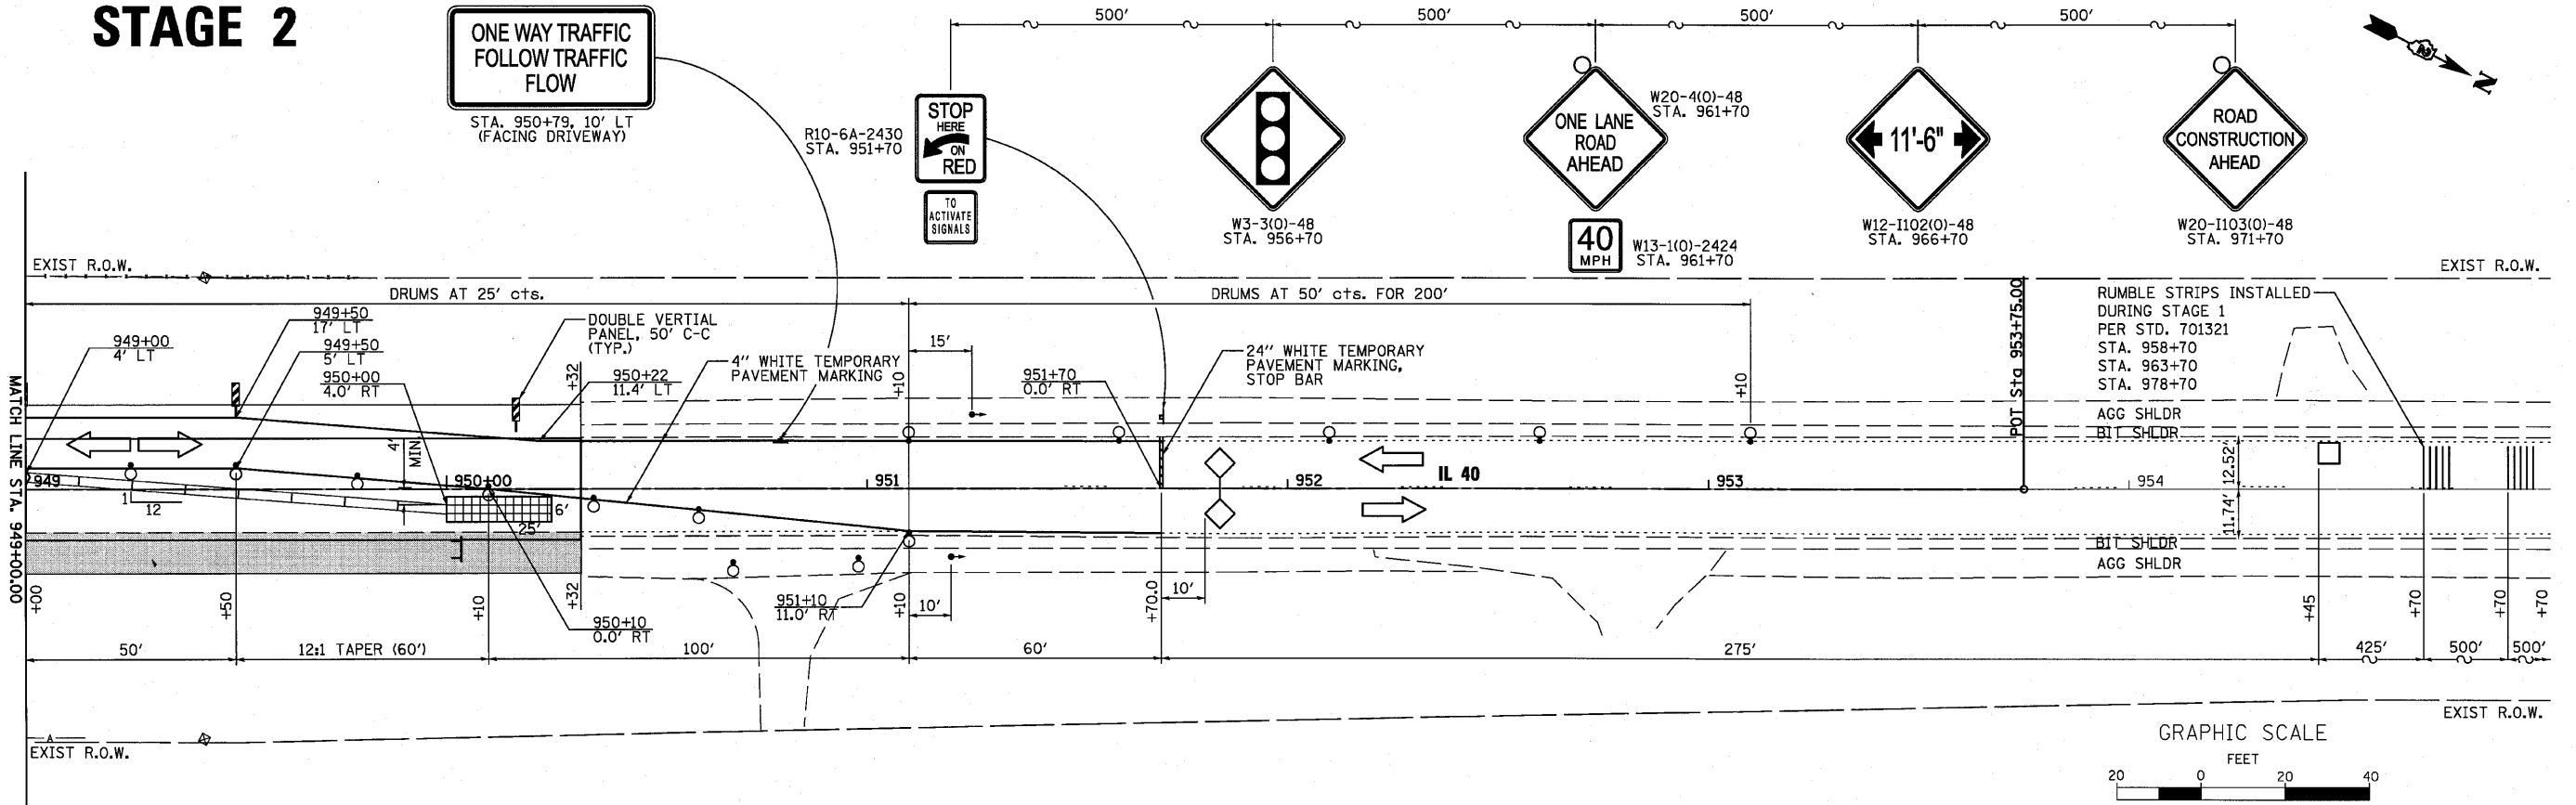

FILE NAME = P:\BIBEL_MEST_Proj\etaeta\2009\1214108_MOT.ITL\48\CONV\1\Drawn\Sheet\0284854-ahh-staging2-2.dgn

WILLS BURKE KELSEY ASSOCIATES LTD.
110 West Main Street, Suite 201
St. Charles, Illinois 60174
(630) 443-7755

USER NAME = #USER#	DESIGNED -	REVISED -
PLOT SCALE =	DRAWN -	REVISED -
PLOT DATE = 8/2/2010	CHECKED -	REVISED -
	DATE - 8/6/10	REVISED -

**STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION**

MAINTENANCE OF TRAFFIC STAGE 2	
SCALE:	SHEET NO. 30 OF 90 SHEETS
STA.	TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
646	8BR-1	WHITESIDE	90	30
CONTRACT NO. 84854			ILLINOIS FED. AID PROJECT	