


# EROSION CONTROL / SEEDING PLAN

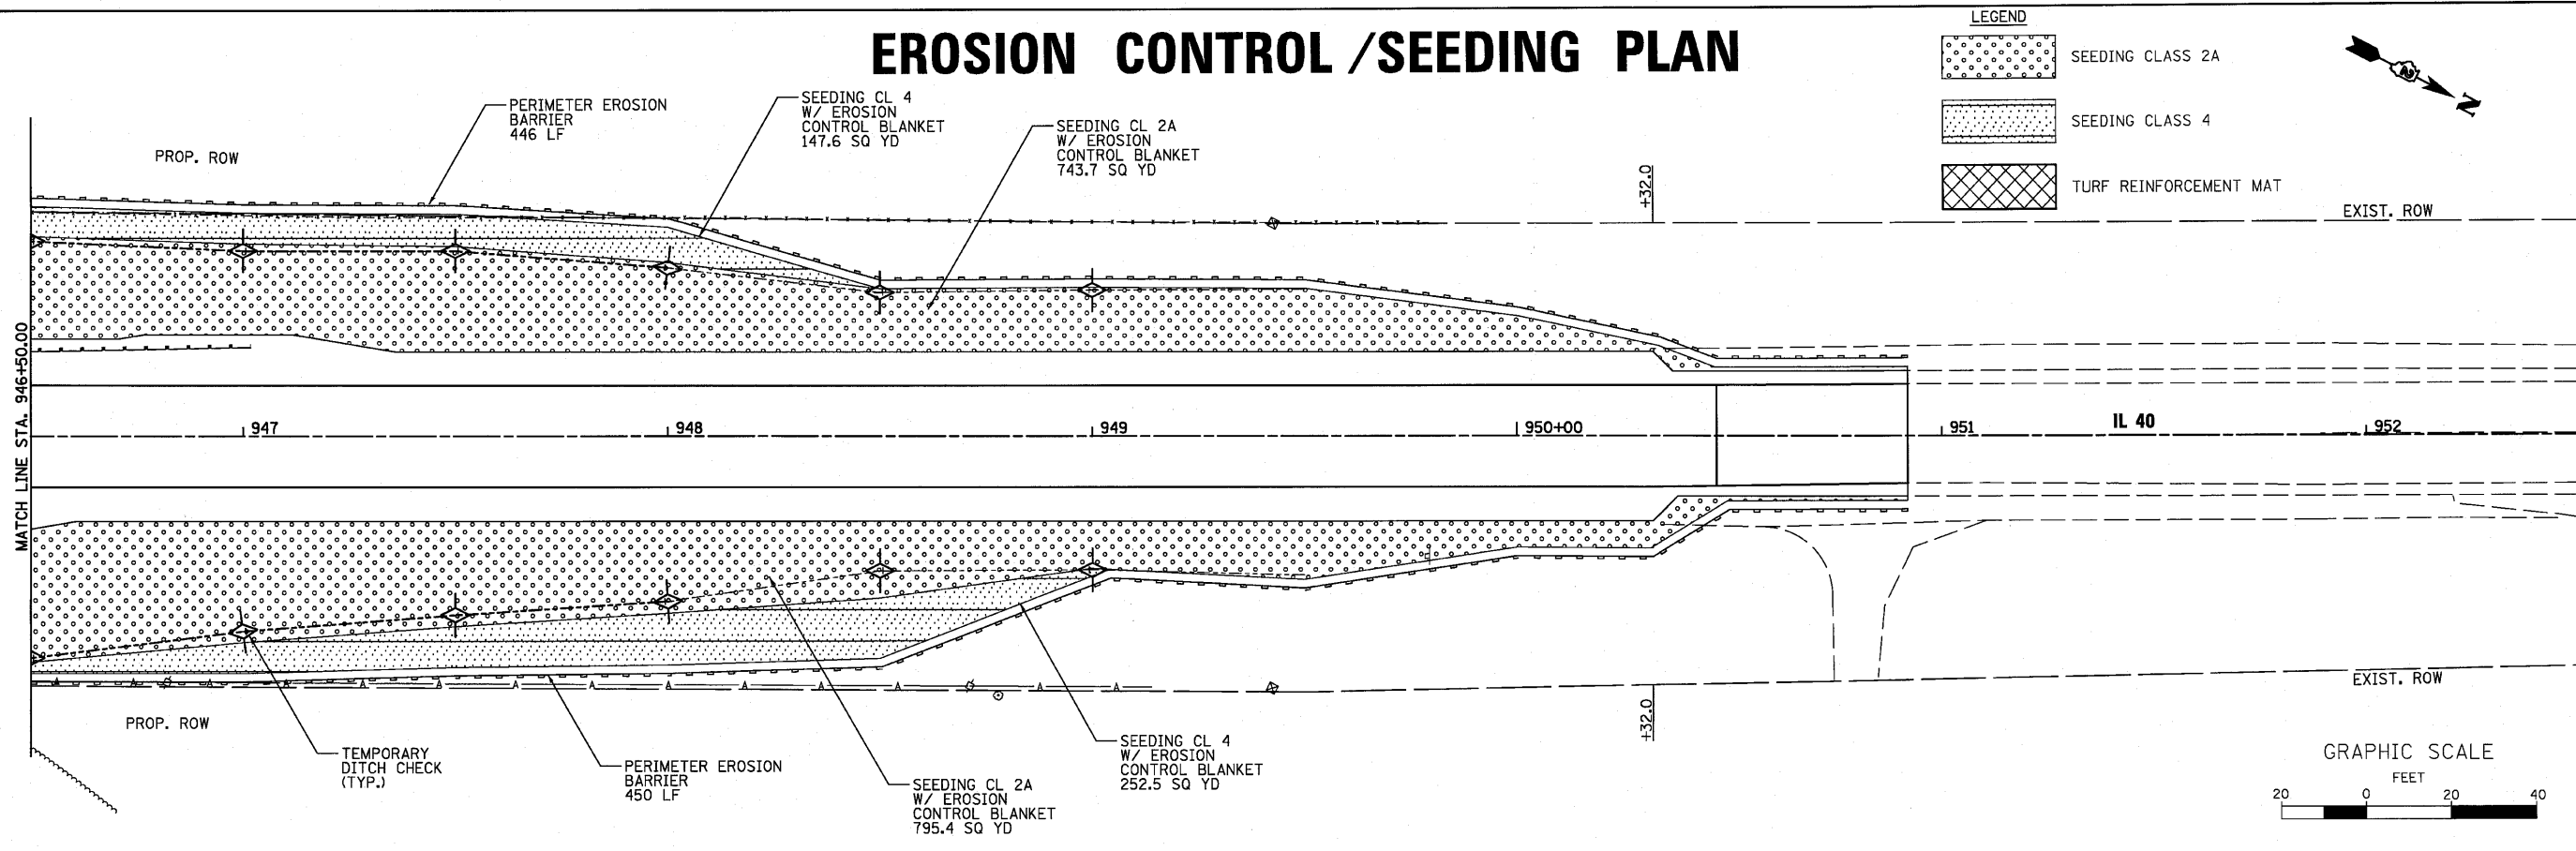

**SWPPP NOTES:**

1. UNLESS OTHERWISE INDICATED, ALL VEGETATIVE AND STRUCTURAL EROSION AND SEDIMENT CONTROL PRACTICES WILL BE CONSTRUCTED ACCORDING TO MINIMUM STANDARDS AND SPECIFICATIONS IN THE ILLINOIS URBAN MANUAL LATEST EDITION.
2. A COPY OF THE APPROVED EROSION AND SEDIMENT CONTROL PLAN AND STORMWATER POLLUTION PREVENTION PLAN SHALL BE MAINTAINED ON THE SITE AT ALL TIMES.
3. THE CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF ANY ADDITIONAL EROSION CONTROL MEASURES NECESSARY TO PREVENT EROSION AND SEDIMENTATION.
4. DURING DEWATERING OPERATIONS, WATER WILL BE PUMPED INTO SEDIMENT BASINS. DEWATERING DIRECTLY INTO FIELD TILES, ELKHORN CREEK, OR STORMWATER STRUCTURES IS PROHIBITED. A DEWATERING PLAN SHALL BE PROVIDED BY THE CONTRACTOR AND APPROVED BY THE RESIDENT ENGINEER.
5. DURING WORK ON THE BANK OF ELKHORN CREEK, WORK MUST BE TIMED TO TAKE PLACE DURING LOW FLOW OR NO-FLOW CONDITIONS. ALSO, STREAM FLOW MUST BE ISOLATED FROM THE WORK AREA USING A NON-ERODABLE UNDERWATER PROTECTION (SANDBAGS, STEEL SHEETS, AQUA BARRIERS, ETC.). IF BYPASS IS NECESSARY, THE INLET OF THE HOSE SHALL BE PLACED IN A SUMP PIT AND THE OUTLET PLACED ON A NON-ERODABLE, ENERGY DISSIPATING SURFACE PRIOR TO REJOINING THE STREAM FLOW OR WETLAND.

**REMOVAL OF EXISTING STRUCTURE AND TEMPORARY CLEAR WATER DIVERSION NOTES**

1. PRIOR TO ANY WORK IN THE STREAM OR STREAMBED, THE CONTRACTOR SHALL HAVE INSTALLED THE SEDIMENT CONTROL SILT FENCE.
2. THE SEDIMENT SILT CONTROL FENCE SHALL EXTEND UP TO THE EXISTING STRUCTURE PRIOR TO DEMOLITION AND THEN BE RE-POSITIONED AFTER DEMOLITION TO PROTECT ANY OPEN AREAS TO THE STREAM BANK OR STREAM.
3. THE REQUIREMENTS FOR THE TEMPORARY CLEAR WATER DIVERSION ARE OUTLINED IN THE SPECIAL PROVISIONS.

FILE NAME = F:\CBBEL\_WEST\_Proj\mets\2009\1124100-W09\_IL\_40\Civil\Ugr\ASht\0284854-shr-er-02.dgn

**WILLS BURKE KELSEY ASSOCIATES LTD.**  
 116 West Main Street, Suite 201  
 St. Charles, Illinois 60174  
 (630) 443-7755

USER NAME = #USER#	DESIGNED -	REVISED -
PLOT SCALE =	DRAWN -	REVISED -
PLOT DATE = 8/2/2010	CHECKED -	REVISED -
	DATE - 8/6/10	REVISED -

**STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION**

<b>EROSION CONTROL &amp; SEEDING PLAN</b>	
SCALE:	SHEET NO. 32 OF 90 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
646	BBR-1	WHITESIDE	90	32
CONTRACT NO. 84854				
FED. ROAD DIST. NO. 2 ILLINOIS FED. AID PROJECT				