
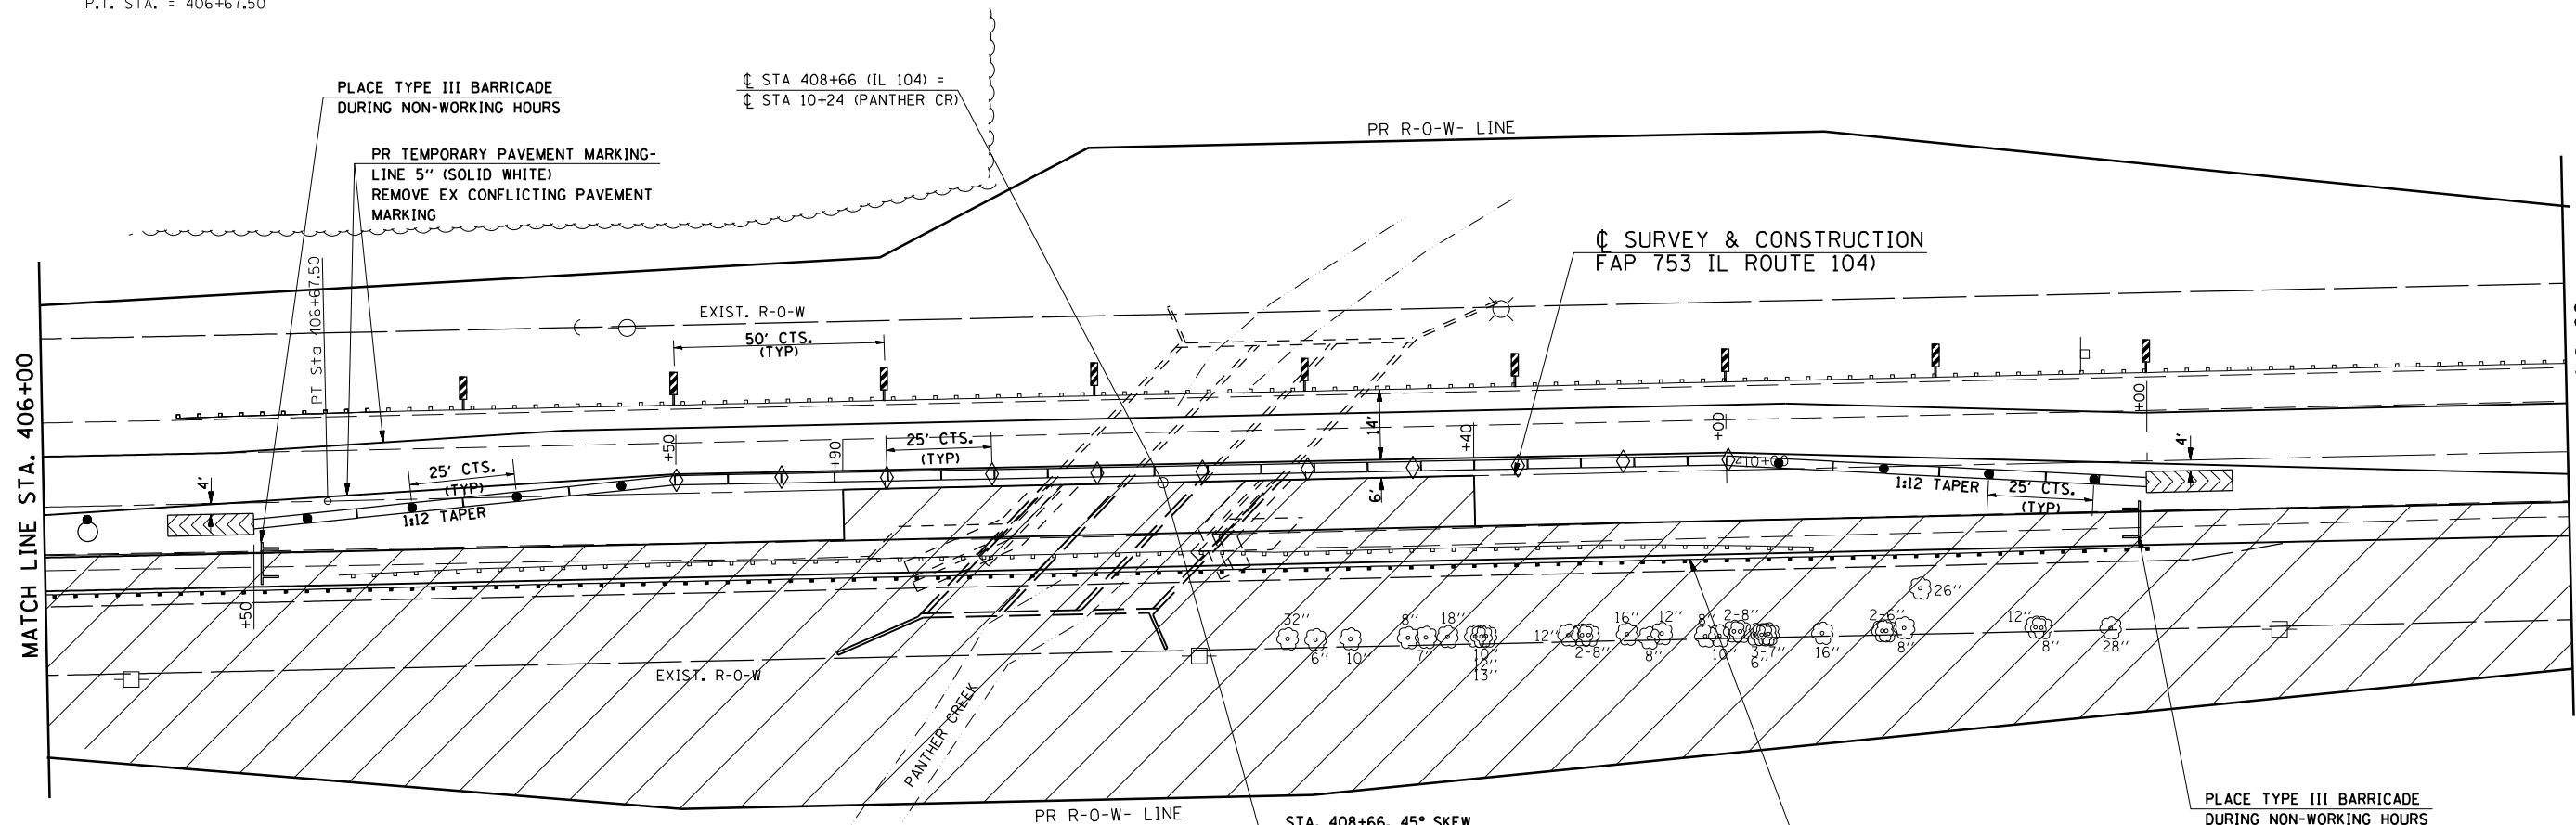


F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
753	139(B-1)	SANGAMON	57	18
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

EXIST. CURVE 10
 PI STA. = 401+67.58
 $\Delta = 1^\circ 47' 54''$ (LT)
 $D = 0^\circ 10' 47''$
 $R = 31,860.25'$
 $T = 500.00'$
 $L = 999.92'$
 $E = 3.92'$
 $e = NC$
 $T.R. = N/A$
 $S.E. RUN = N/A$
 $P.C. STA. = 396+67.58$
 $P.T. STA. = 406+67.50$

TEMPORARY SIGNAL PHASE DIAGRAM

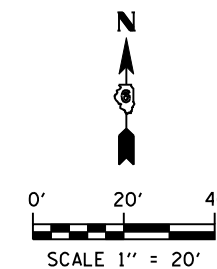

LEGEND

- WORK AREA
- SIGN
- TYPE III BARRICADE
- DRUM WITH STEADY BURNING LIGHT
- TRAFFIC SIGNAL
- TYPE C BIDIRECTIONAL REFLECTOR
- TEMPORARY CONCRETE BARRIER
- IMPACT ATTENUATOR
- STEADY BURNING LIGHTS AND DOUBLE VERTICAL PANELS
- DOUBLE VERTICAL PANEL

STAGE 2 CONSTRUCTION:

1. RELOCATE TEMPORARY CONCRETE BARRIER AND OTHERS TRAFFIC CONTROL ITEMS IN ACCORDANCE WITH STANDARD 701321 AND STAGE 2 TRAFFIC DETAILS.
2. SHIFT TRAFFIC TO LEFT (WESTBOUND LANE).
3. REMOVE REMAINING HALF OF EXISTING STRUCTURE, GUARDRAIL AND PAVEMENT FOR NEW STRUCTURE RIGHT OF CENTERLINE.
4. CONSTRUCT REMAINING PORTION OF NEW STRUCTURE RIGHT OF CENTERLINE.
5. CONSTRUCT HMA SHOULDERS, EMBANKMENT AND DITCHES RIGHT OF CENTERLINE.
6. INSTALL PROPOSED GUARDRAIL RIGHT OF CENTERLINE.

STAGE 3 CONSTRUCTION:

1. REMOVE TRAFFIC CONTROL ITEMS ASSOCIATED WITH STANDARD 701321 AND RESTORE TWO-LANE TWO-WAY TRAFFIC.
2. MILL BUTT JOINTS, CONSTRUCT THE HMA SURFACE/ LEVELING BINDER, FINAL SHOULDER LIFT, AGGREGATE SHOULDERS AND STRIPING USING THE APPROPRIATE TRAFFIC CONTROL.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
 MAINTENANCE OF TRAFFIC
 STAGE 2
 STA. 406+00 TO STA. 412+00

DATE: 8/15/07
 DRAWN BY JCW
 CHECKED BY JRB