NOTE: DISTANCES SHALL BE PROVIDED BY IDOT DISTRICT 4 OPERATIONS

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
315	(34-6,55-1)	HANCOCK/ McDONOUGH	433	244
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

STATE CONTRACT NO. 68206

SIGN DETAIL

1:10

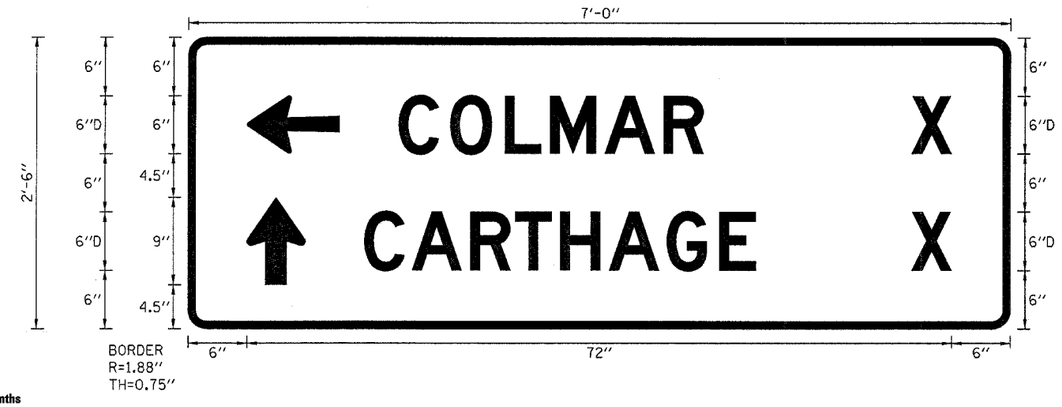

Panel Style: D1-2A.ssi

Dimensions are in inches.tenths

Letter spacings are to start of next letter

SIGN NUMBER	D1-2A
WIDTH x HGHT.	7'-0" x 2'-6"
BORDER WIDTH	0.75"
CORNER RADIUS	1.88"
MOUNTING	Ground
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/Pure White

SYMBOL	ROT	X	Y	WID	HT
ARMED	180	6	18	6	9.5
ARUP	0	6	4.5	6	9

LETTER POSITIONS (X)																																		LENGTH	SERIES/SIZE
	C	O	L	M	A	R		X																											D 2000
21.5	5.3	5.6	4.6	5.6	6	4.1	21.3	4.1	6																									56.5	6
	C	A	R	T	H	A	G	E		X																									D 2000
18	4.9	6	4.6	4.6	5	5.9	5.4	3.7	15.9	4.1	6																							60	6

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SIGN PANEL STANDARDS

SHEET 5 OF 14

SCALE: VERT. N/A
HORIZ. N/A

DATE 6/21/04

DRAWN BY BDS

CHECKED BY SRD

Plot Date: 7/19/2006
Plot Time: 10:27:10 AM
Plotted By: bschmidt
Pen Table: idot.tbl
Filenames: I:\03033\Cadd\Construction_Plans\223_DetailsSignPanel.dgn