


SUGGESTED CONSTRUCTION STAGING PLAN

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
F.A. 646	(Y) W-1, RS-3	PEORIA	142	48
F.A.P.				
FED ROAD DIST NO 4		ILLINOIS PROJECT		

GENERAL CONSTRUCTION & STAGING NOTES

1. After north-bound traffic is moved to the ultimate inside lane, as shown on Typical Detail III-C, Stage III, work shall begin on the east side of IL. Rte. 40.
2. Remove existing bituminous shoulders, widen IL. Rte. 40 for the right turn lane at Frontage Rd. #2. Pavement removal on the east side of IL. Rte. 40 as shown on the plans.
3. Access for the residences east of Frontage Rd. #2 and Service Drive #1 shall be provided in accordance with Article 107.09 of the Standard Specifications.
4. Deerbrook Dr. - Traffic to remain on existing Deerbrook Dr. during widening and resurfacing operations. Std. 701501 and 701701 shall be used.
5. Barricades shall be placed to close the ultimate outside northbound lane during work adjacent to the east edge of pavement and/or shoulder (Std. 701401). Refer to Typical Detail III-C in Stage III. Temporary right turn lanes shall be provided for northbound traffic at the various sideroads, using the ultimate northbound outside lane. Taper lengths and storage lengths to be determined by the Engineer.
6. Full depth bituminous pavement and bituminous shoulders for IL. Rte. 40 constructed during this stage may be constructed full depth. The bituminous surface course on the sideroads, frontage road and service drives may also be placed during this stage.
7. Aggregate shoulders may be placed adjacent to the northbound shoulder during this stage if desired.

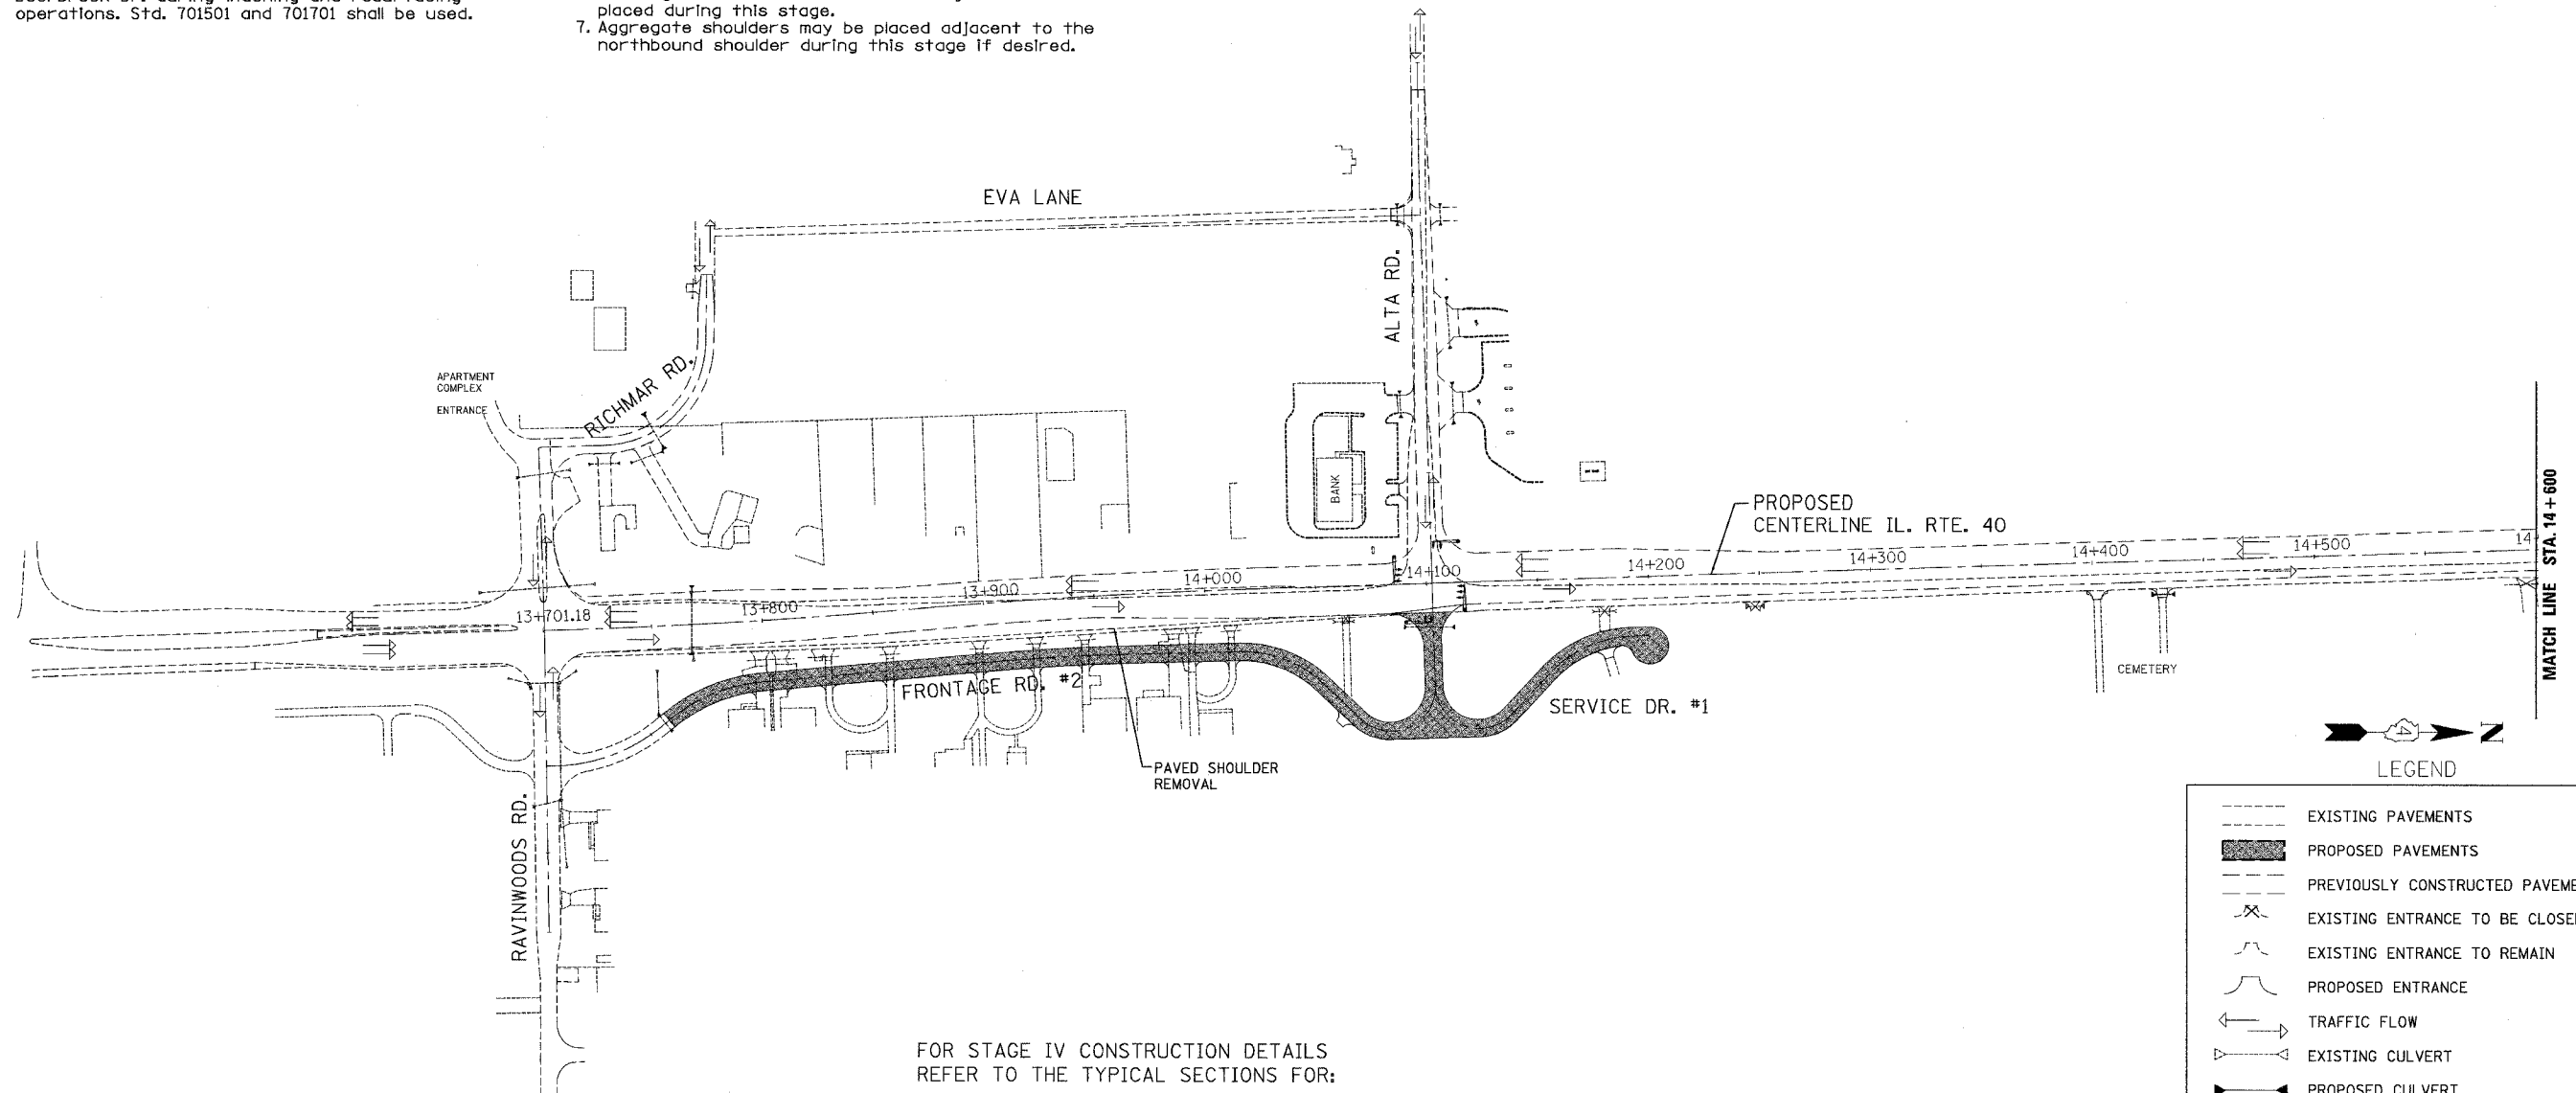

FOR STAGE IV CONSTRUCTION DETAILS REFER TO THE TYPICAL SECTIONS FOR:

1. Station 13+941 to 14+259 and Details A & B.
2. Station 14+259 to 14+601 and Detail A. 14+937 to 15+235

LEGEND

	EXISTING PAVEMENTS
	PROPOSED PAVEMENTS
	PREVIOUSLY CONSTRUCTED PAVEMENTS
	EXISTING ENTRANCE TO BE CLOSED
	EXISTING ENTRANCE TO REMAIN
	PROPOSED ENTRANCE
	TRAFFIC FLOW
	EXISTING CULVERT
	PROPOSED CULVERT
	PREVIOUSLY CONSTRUCTED CULVERT
	BUILDING REMOVAL
	PAVEMENT REMOVAL

ILLINOIS DEPARTMENT OF TRANSPORTATION  
**STAGE IV & V CONSTRUCTION**  
**ILLINOIS ROUTE 40**

SCALE: NONE  
 DATE: 09/10/06  
 DRAWN BY: JDU  
 CHECKED BY: ECM