


EXIST. CURVE C1
 PI STA. = 228+00.00
 $\Delta = 0^\circ 40' 08''$ (RT)
 $D = 0^\circ 04' 27''$
 $R = 77,109.25'$
 $T = 450.05'$
 $L = 900.09'$
 $E = 1.31'$
 $e =$
 $T.R. =$
 $S.E. RUN =$
 $P.C. STA. = 223+49.95$
 $P.T. STA. = 232+50.04$

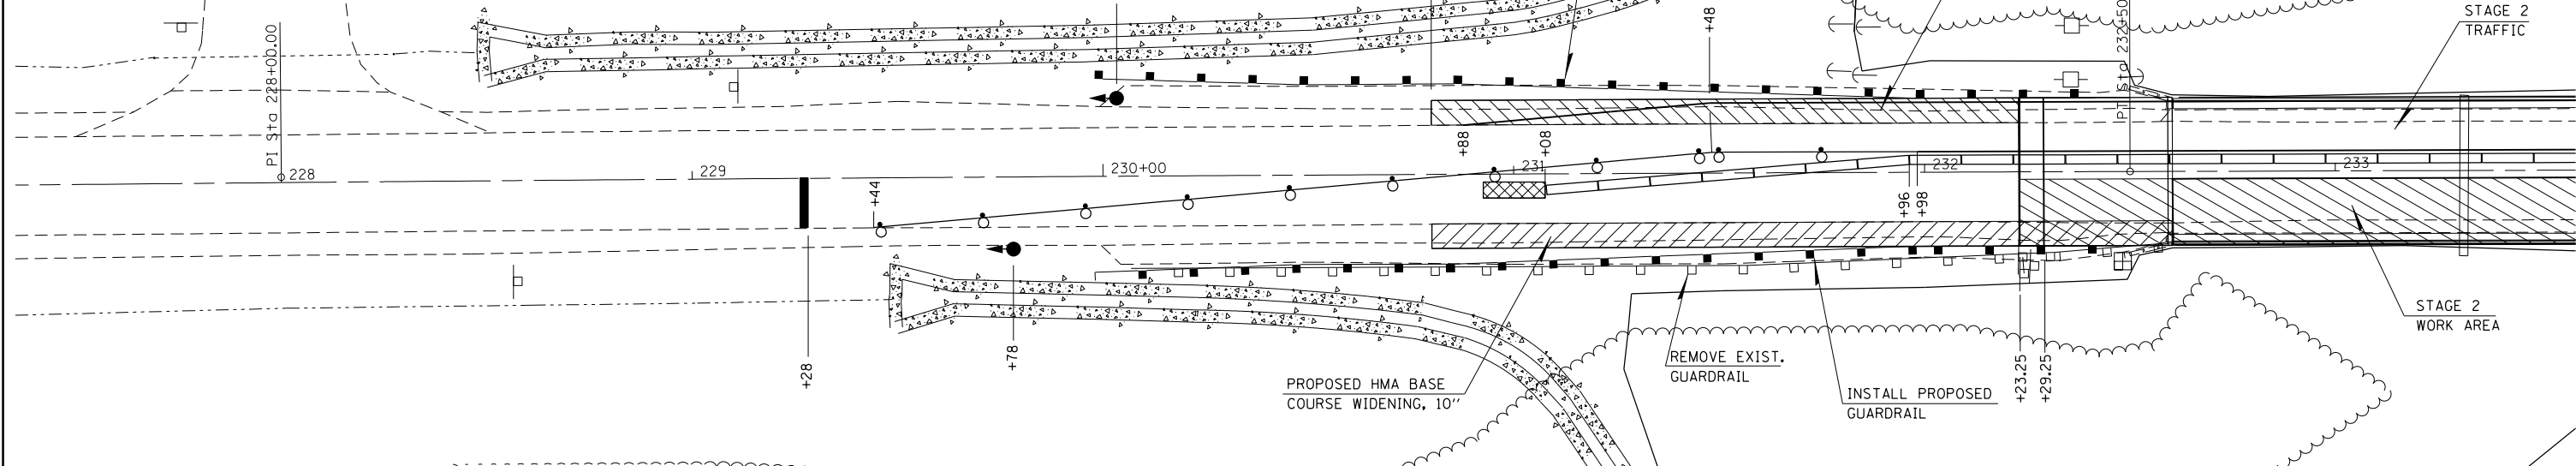

SUGGESTED STAGE 2 TRAFFIC

1. SET UP TEMPORARY TRAFFIC CONTROL UTILIZING THESE PLANS IN CONJUNCTION WITH TRAFFIC CONTROL AND PROTECTION, STANDARD 701321.
2. RELOCATE TEMPORARY CONCRETE BARRIERS AND PAVEMENT MARKING IN ACCORDANCE WITH THESE PLANS AND STANDARD 701321.
3. REMOVE ANY CONFLICTING PAVEMENT MARKINGS.
4. CHANNEL ALL TRAFFIC TO THE EAST SIDE OF STRUCTURE.

SUGGESTED STAGE 2 CONSTRUCTION


1. STAGE 2 CONSTRUCTION SHALL INCLUDE THE REMOVAL AND REPLACEMENT OF THE WEST SIDE OF THE EXISTING BRIDGE DECK FOR SN 070-0015.
2. STAGE 2 CONSTRUCTION SHALL INCLUDE THE REMOVAL OF THE EXISTING GUARDRAIL, THE INSTALLATION OF THE PROPOSED GUARDRAIL AND THE CONSTRUCTION OF TEMPORARY RAMPS ON THE ENDS OF THE APPROACH SLABS OF THE PROPOSED STRUCTURE.

SUGGESTED POST-STAGE TRAFFIC

1. REMOVE TEMPORARY TRAFFIC SIGNALS AND TEMPORARY CONCRETE BARRIERS.
2. SHIFT TRAFFIC AS NEEDED TO MILL PAVEMENT AND RESURFACE TO FINAL GRADE IN ACCORDANCE WITH TRAFFIC CONTROL AND PROTECTION STANDARD 701306.

SUGGESTED POST-STAGE CONSTRUCTION

1. FOLLOWING COMPLETION OF STAGE 2, MILLING, TEMPORARY RAMPS INSTALLATION AND REMOVAL, FINAL HMA SURFACE COURSE AND FINAL STRIPING SHALL BE CONSTRUCTED.

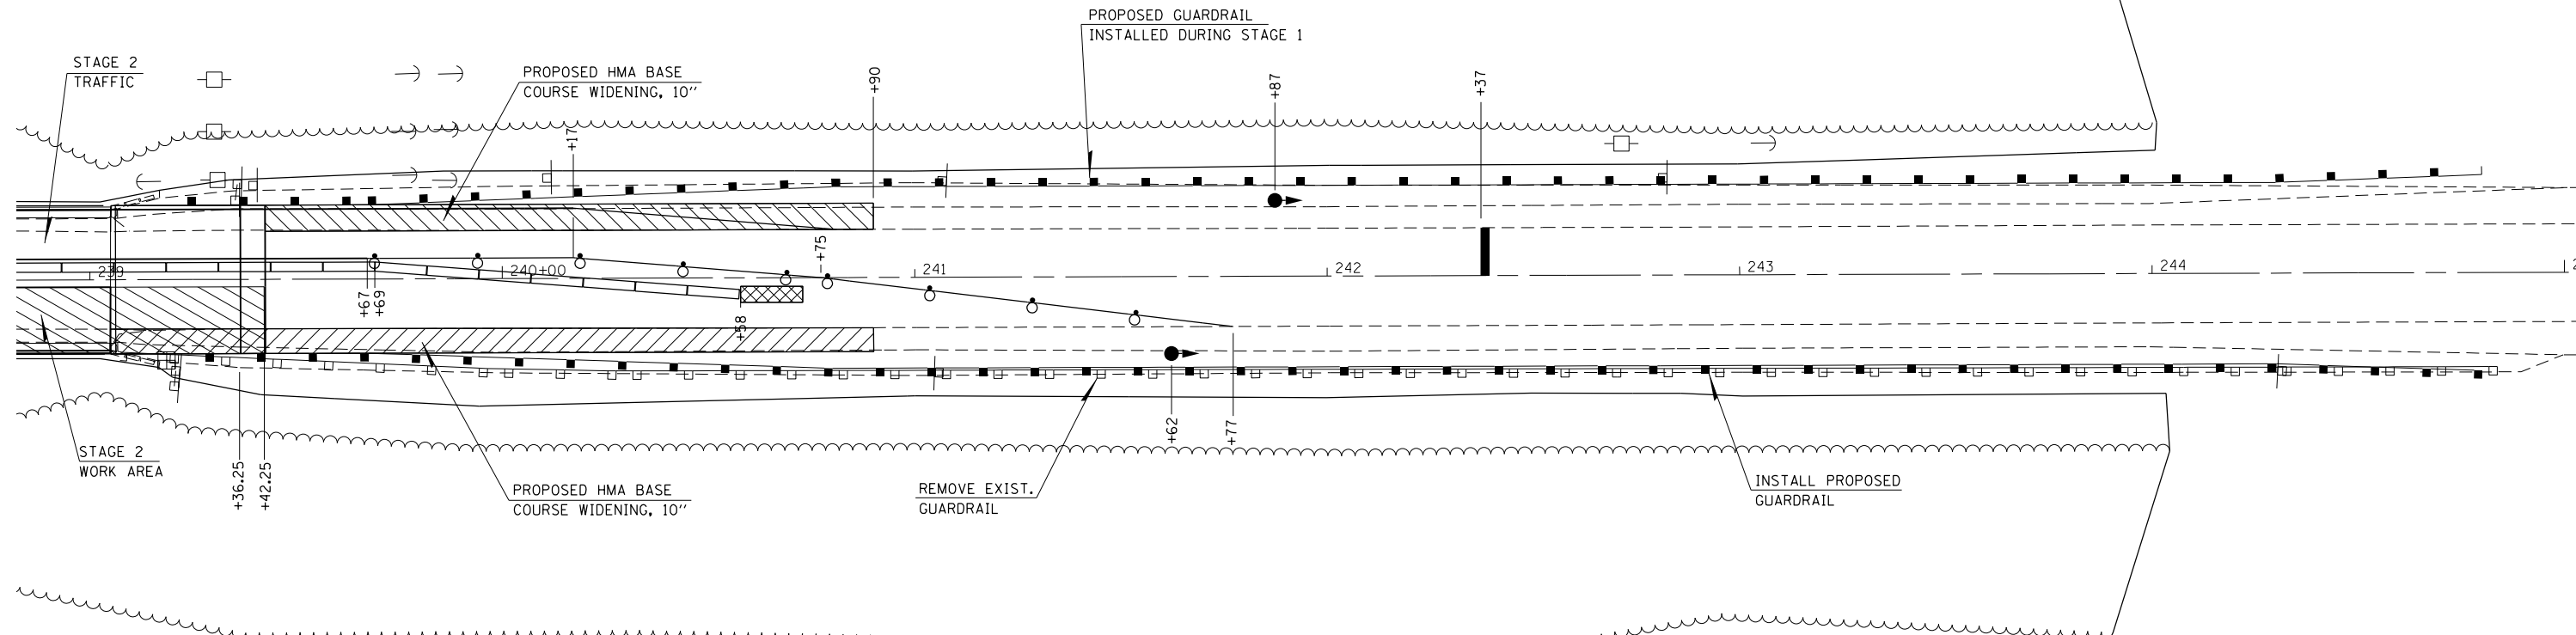

FILE NAME =	USER NAME = steffenmk	DESIGNED -	REVISED -
ci:\pw\work\p\dot\steffenmk\d0234885\074357-sht-staging.dgn		DRAWN -	REVISED -
Default	PLOT SCALE = 40.0000' / in.	CHECKED -	REVISED -
	PLOT DATE = 8/15/2014	DATE -	REVISED -

**STATE OF ILLINOIS
 DEPARTMENT OF TRANSPORTATION**

**SN 070-0015
 STAGE 2 CONSTRUCTION**

SCALE: SHEET 2 OF 2 SHEETS STA. TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
762	(2BR)BR-1	Moultrie	48	15
CONTRACT NO. 74357			ILLINOIS FED. AID PROJECT	