STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
FAP 431	22-5HB	DU PAGE	131	64
FED. ROAD DIST. NO. 1	ILLINOIS	PROJECT		

SHEET 17 OF 39

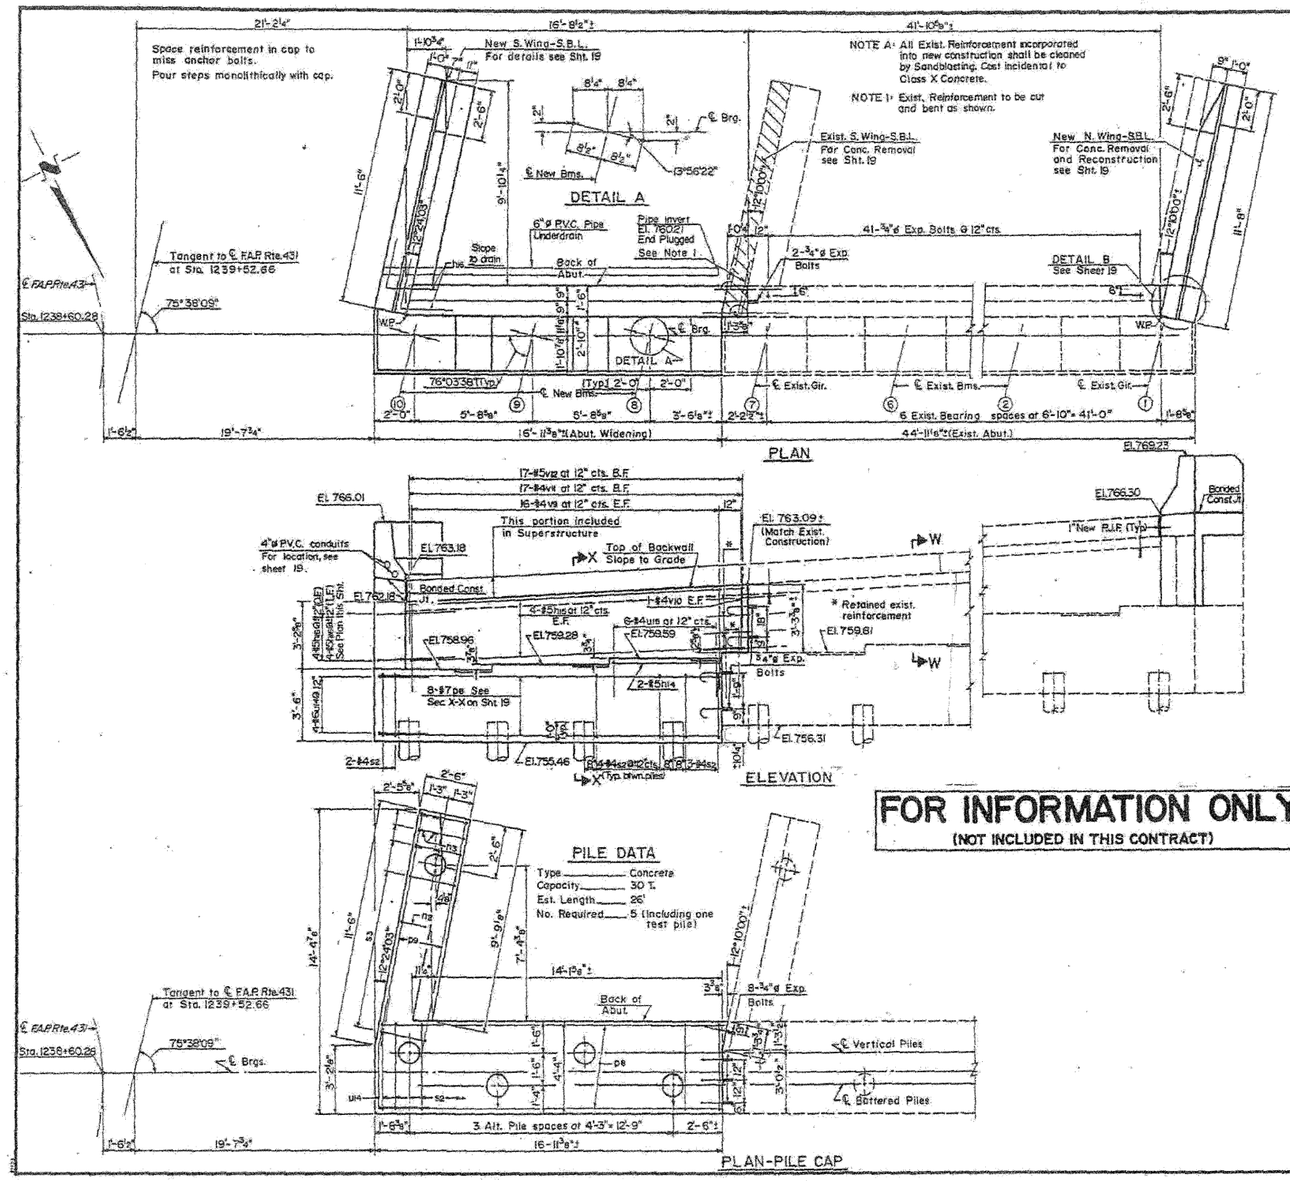

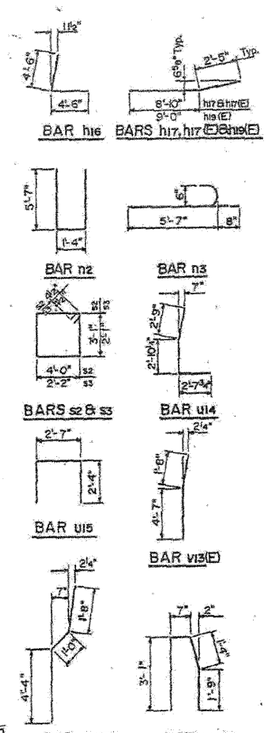

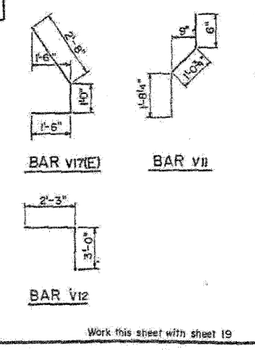

BILL OF MATERIAL

BAR	NO.	SIZE	LENGTH	SHAPE
h16	2	#5	5'-3"	
h15	8	#5	16'-6"	
h16	8	#5	9'-0"	L
h17	6	#4	11'-3"	
h17(E)	1	#4	11'-3"	
h18	6	#4	11'-3"	
h18(E)	5	#4	11'-3"	
h19(E)	3	#4	11'-5"	
h20(E)	7	#4	11'-5"	
n2	9	#6	12'-6"	
n3	6	#6	6'-3"	
p8	8	#7	16'-6"	
p9	6	#7	11'-3"	
s2	17	#4	14'-11"	
s3	12	#4	9'-3"	
u14	4	#6	8'-3"	
u15	6	#4	7'-3"	
v9	32	#4	4'-9"	
v10	2	#4	2'-6"	
v11	17	#4	3'-3"	
v12	17	#5	5'-3"	
v13(E)	3	#6	6'-3"	
v14(E)	11	#6	7'-0"	
v15(E)	14	#6	6'-3"	
v16(E)	10	#5	6'-9"	
v17(E)	7	#5	5'-2"	

ITEM	UNIT	QUANTITY
Class X Concrete	Cu. Yds.	22.6
Reinforcement Bars (Epoxy Coated)	Lbs.	510
Reinforcement Bars	Lbs.	1,500
Concrete Piles	Lin. Ft.	104
Test Pile Concrete	Each	1
Expansion Bolts (3/4"ø)	Each	51
Concrete Removal	Cu. Yds.	4
Structure Excavation	Cu. Yds.	30
Pipe Underdrain, 6"	Lin. Ft.	17
Porous Granular Embankment	Cu. Yds.	176

WEST ABUTMENT WIDENING-S.B.I.
F.A.P. ROUTE 431
SECTION 22-5HB
DU PAGE COUNTY
STATION 1239+52.66
STRUCTURE NO. 022-0111

MTA, INCORPORATED
DESIGNED M.J.S. CHECKED P.L.
DRAWN G.S. DATE

Work this sheet with sheet 19

EXISTING PLAN INFORMATION 8 OF 13
STRUCTURE NO. 022-0111

FOR INFORMATION ONLY

benesch
alfred benesch & company
Engineers · Surveyors · Planners
205 North Michigan Avenue, Suite 2400
Chicago, Illinois 60601
312-565-0450 Job No. 10060

SHEET NO. 23	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
28 SHEETS	290 / 355	22(1, 1-1, 2&3)RS-7	DUPAGE	546	468
			CONTRACT NO. 60C51		
	FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

x:\10000s\10050\engineering_documents_contract\SN_022_0111_0112_Lake_St\0111-60051-023-Existplan_06.dgn
11\12\2009 18:17:55