SN: 6S084I072L105.9

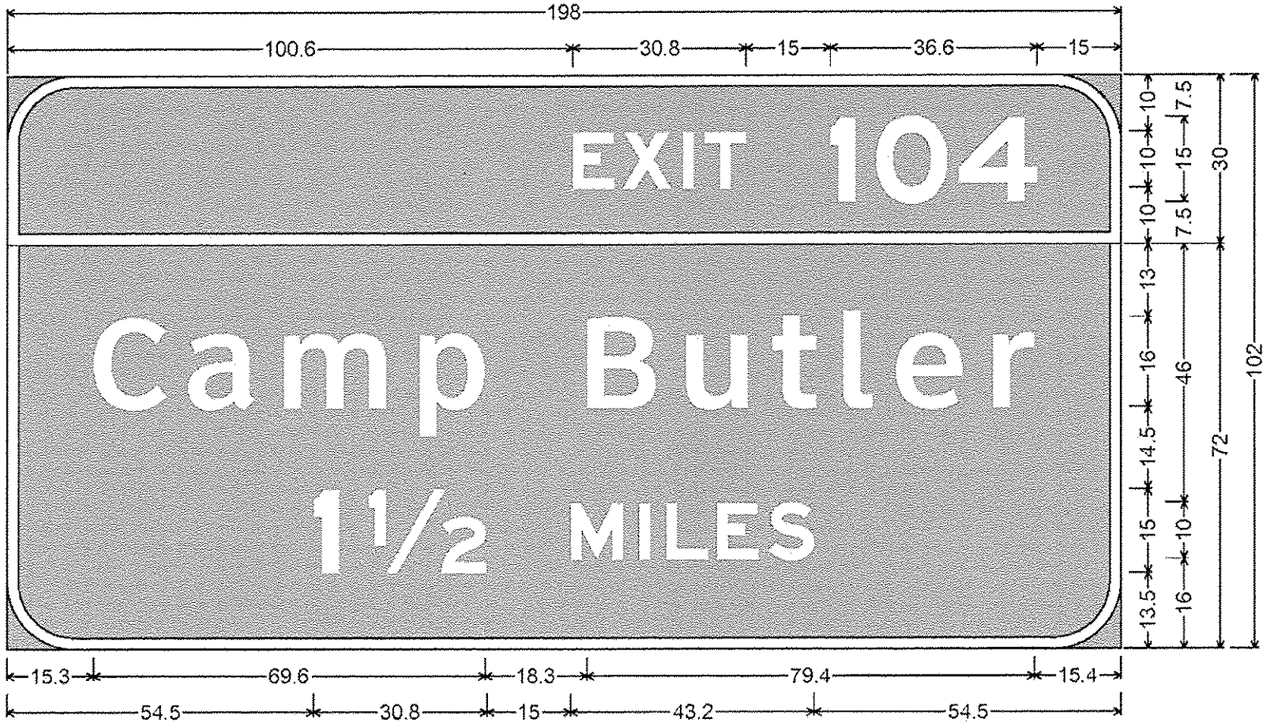

12.0" Radius, 2.0" Border, White on Green;
"EXIT 104" E Mod 2K;
12.0" Radius, 2.0" Border, White on Green;
"Camp Butler" ClearviewHwy-5-W; "1½ MILES" E Mod 2K;

SN: 6S084I072L105.9

12.0" Radius, 2.0" Border, White on Green;
"EXIT 103A-B" E Mod 2K;
12.0" Radius, 2.0" Border, White on Green;
"Chicago" ClearviewHwy-5-W; "St Louis" ClearviewHwy-5-W; "Jacksonville" ClearviewHwy-5-W;
"2 MILES" E Mod 2K;
Table of letter and object lefts.

E 63.8	X 72.7	I 83.4	T 87.3	1 109.7	0 117.8	3 132.6	A 146.9	- 163.1	B 170.9	
55 55.5	72 106.5									
C 47.1	h 65.0	i 81.8	c 90.6	a 105.1	g 121.5	o 138.5				
S 45.4	t 60.4	L 86.0	o 99.6	u 117.4	i 134.1	s 142.3				
J 16.8	a 31.0	c 47.4	k 62.8	s 77.0	o 91.8	n 109.6	v 124.8	i 140.9	l 150.3	l 160.2	e 169.4
2 63.8	M 91.0	I 103.1	L 107.9	E 116.9	S 126.1					

FILE NAME = P:\SIGN STRUCTURES\SignRepl.dgn Default	USER NAME = posadasds	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGN PLAN DETAILS	F.A. RTE.	SECTION: DISIBICI_6
		DRAWN -	REVISED -			VAB	COUNTY: VARIOUS
	PLOT SCALE = 100.0000 ft / in.	CHECKED -	REVISED -				TOTAL SHEETS: 30
	PLOT DATE = Aug-27-2013 12:07:08PM	DATE -	REVISED -		SCALE:		SHEET NO.: 29
					SHEET OF SHEETS STA. TO STA.		CONTRACT NO. 46305
							ILLINOIS FED. AID PROJECT