

STYLE (a)



STYLE (b)



STYLE (c)



STYLE (d)




STYLE (e)




STYLE (f)

When road classification only is on the second line, it should not be abbreviated.

**TYPICAL SIGN STYLES**

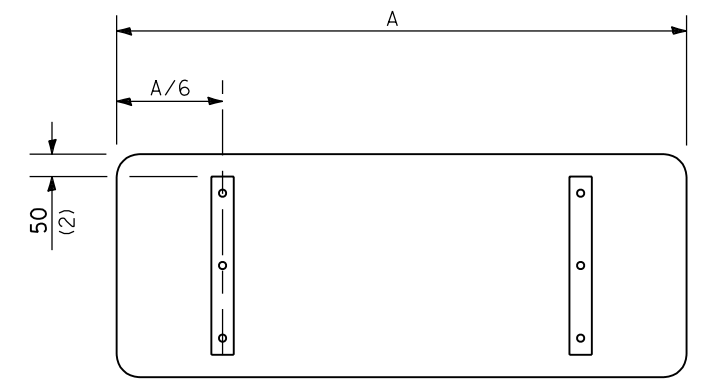

**SUPPORTING CHANNELS**

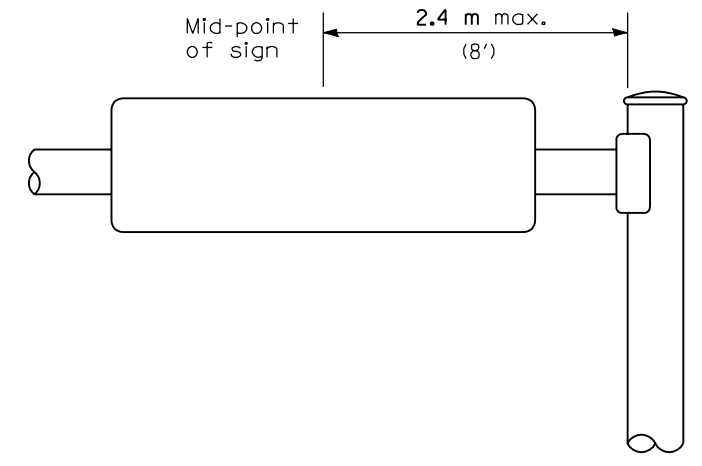

**MOUNTING LOCATION**

**GENERAL NOTES**

All signs shall have a white reflectorized legend and border on a green reflectorized background.

The sign panels shall be mounted as shown on Standard 720001 or as specified in the plans.

All dimensions are in millimeters (inches) unless otherwise shown.

SIGN STYLE	DIMENSIONS								LETTER SIZE						BORDER
	A	B	C	D	E	F	G	H	UPPER CASE PRIMARY			UC / LC PRIMARY			
									1	2	*	1	2	*	
a,b,d	Var. (18)	450 (1.50)	40 (6)	150 (6)	150 (6)	-	-	-	150D (6D)	-	-	150/115 (6/4.5)	-	-	15 (0.6)
c,e	Var. (24)	600 (1.50)	40 (6)	150 (6)	-	-	175 (7)	100 (4)	150D (6D)	-	75D (3D)	150/115 (6/4.5)	-	75D (3D)	15 (0.6)
a,b,d	Var. (24)	600 (1.50)	40 (8)	200 (8)	200 (8)	-	-	-	200D (8D)	-	-	200/150 (8/6)	-	-	15 (0.6)
f	Var. (30)	750 (2.25)	60 (6)	150 (6.5)	165 (6.5)	125 (5)	-	-	150D (6D)	150D (6D)	-	150/115 (6/4.5)	150/115 (6/4.5)	-	20 (0.8)
c,e	Var. (30)	750 (2.25)	60 (8)	200 (8)	-	-	230 (9)	115 (4.5)	200D (8D)	-	100D (4D)	200/150 (8/6)	-	100D (4D)	20 (0.8)
a,b,d	Var. (30)	750 (2.25)	60 (10)	250 (10)	250 (10)	250 (10)	-	-	250D (10D)	-	-	250/190 (10/7.5)	-	-	20 (0.8)
c,e	Var. (36)	900 (2.25)	60 (10)	250 (10)	-	-	280 (11)	125 (5)	250D (10D)	-	125D (5D)	250/190 (10/7.5)	-	125D (5D)	20 (0.8)
f	Var. (40)	1000 (3.00)	75 (8)	200 (8.5)	215 (8.5)	120 (7)	-	-	200D (8D)	200D (8D)	-	200/150 (8/6)	200/150 (8/6)	-	20 (0.8)
f	Var. (48)	1200 (3.00)	75 (10)	250 (10)	250 (10)	200 (8)	-	-	250D (10D)	250D (10D)	-	250/190 (10/7.5)	250/190 (10/7.5)	-	20 (0.8)

\* Supplemental Messages

Illinois Department of Transportation  
 APPROVED January 1, 2004  
 ENGINEER OF OPERATIONS  
 APPROVED January 1, 2004  
 ENGINEER OF DESIGN AND ENVIRONMENT

DATE	REVISIONS
1-1-04	Revised mounting location.
1-1-97	Renum. Standard 2380-5.

**MAST ARM MOUNTED STREET NAME SIGNS**

**STANDARD 720016-01**