

NOTES

Detail I - With Bar Splicer or Couplers:

Connect one (1) I'' x 7' 'x ''W'' steel £ to the

top layer of couplers with 2-5₈'' \$\phi\$ bolts

screwed to coupler at approximate £ of

each barrier panel.

Detail II - With Extended Reinforcement Bars:

Connect one (1) 1" x 7" x "W" steel 1 to the concrete slab or concrete wearing surface with 2-58" \$\phi\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate \$\mathbb{C}\$ of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier.


The I'' x 7'' x 'W'' plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.


SECTIONS THRU SLAB OR DECK BEAM

*** Dimension shown is minimum required embedment into concrete.


If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

**** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

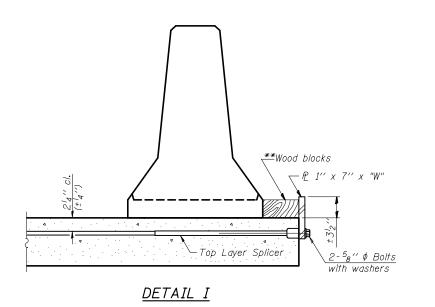

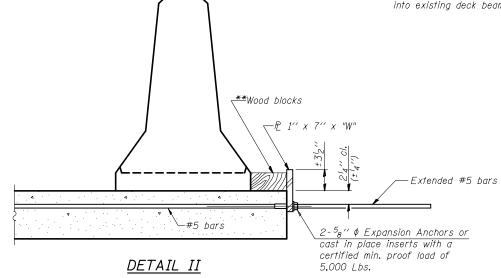

EXISTING DECK BEAM



STEEL RETAINER & 1" x 7" x "W"

* Required only with Detail II

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"

R-27

7-1-10

DESIGNED - A.Y.V.	EXAMINED		DATE -	
CHECKED -]	ENGINEER OF STRUCTURAL SERVICES		
DRAWN - A.Y.V.	PASSED		REVISED	
CHECKED -		ENGINEER OF BRIDGES AND STRUCTURES	REVISED	

STATE 0	F ILLINOIS
DEPARTMENT OF	TRANSPORTATION

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION STRUCTURE NO. 014-0058	
SHEET NO. 18 OF 22 SHEETS	_

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.				
327	14-14B-I	CLINTON	27	23				
		CONTRACT NO. 76G91						
ILLINOIS FED. AID PROJECT								