


**EXISTING TYPICAL SECTION NO 10**  
 STA 605+95.78 TO STA 608+84.79, STEARNS ROAD

- LEGEND**
- ① PORTLAND CEMENT CONCRETE PAVEMENT 10" (JOINTED)
  - ② STABILIZED SUBBASE, HOT-MIX ASPHALT, 4 1/2"
  - ③ AGGREGATE SUBGRADE, 12"
  - ④ PORTLAND CEMENT CONCRETE PAVEMENT 9"
  - ⑤ COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.24
  - ⑥ CONCRETE MEDIAN, TYPE SB (SPEC)
  - ⑦ POLYMERIZED HOT-MIX ASPHALT SURFACE COURSE, MIX "F", N90 (IL 9.5mm), 2"
  - ⑧ HOT-MIX ASPHALT BINDER IL-19.0, N70, 10 1/2"
  - ⑨ HOT-MIX ASPHALT SHOULDERS, 6"
  - ⑩ HOT-MIX ASPHALT SHOULDERS, 8"
  - ⑪ BICYCLE RAILING
  - ⑫ AGGREGATE SHOULDERS, TYPE B, 6" OR 8"
  - ⑬ HOT-MIX ASPHALT SURFACE, MIX "D", N50, 1 1/2"
  - ⑭ AGGREGATE BASE COURSE, TYPE B, 6"
  - ⑮ HOT-MIX ASPHALT SURFACE, MIX "C", N50, 2"
  - ⑯ TOPSOIL EXCAVATION AND PLACEMENT
  - ⑰ CLAY LINER, 8"
  - ⑱ STEEL PLATE BEAM GUARD RAIL, TYPE A

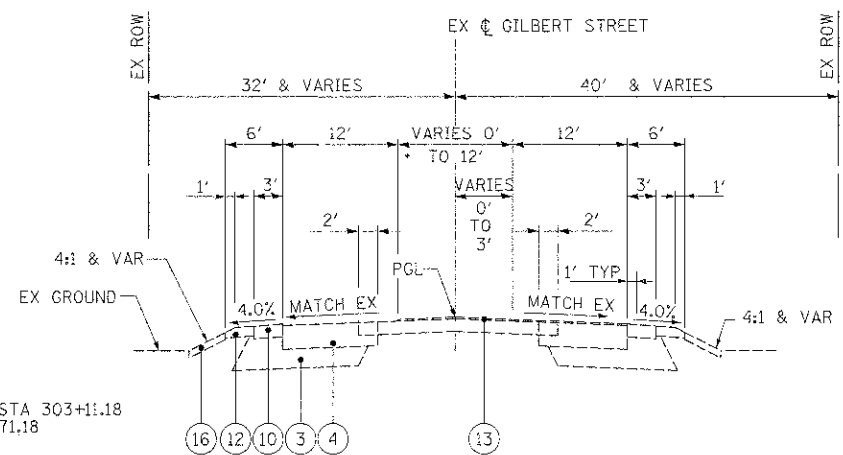

• VARIES FROM 0' AT STA 303+11.18 TO 12' AT STA 306+71.18

**EXISTING TYPICAL SECTION 11**  
 STA 300+02.37 TO STA 306+71.18, GILBERT STREET  
 (PR STA 301+18.80 TO STA 307+80.38)