


PT. TO PT.	TYPE 1 15"	TRENCH BACKFILL
	LIN FT	CU YD
1-2	45	18
3-2	2	
2-6	188	127
5-4	2	
7-6	2	
6-10	271	202
9-8	2	
10-13	35	28
12-11	21	14
TOTALS	568	389

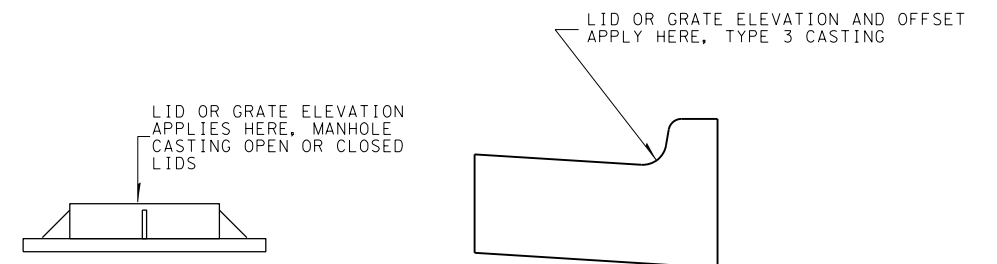

PT	LOCATION	DESCRIPTION	LID OR GRATE	INLET INVERT	OUTLET INVERT	SYM
1	50.0' LT STA 36+34.0	INLETS TA T3F&G	604.54		600.65	●
2	40.5' LT STA 36+80.0	MH TA 4' DIA T1F&CL	605.18	600.47 N&W	600.37	○
3	36.4' LT STA 36+80.0	INLETS TA T3F&G	604.55		600.57	●
5	36.7' LT STA 37+64.0	INLETS TA T3F&G	604.34		600.15	●
6	40.5' LT STA 38+77.0	MH TA 4' DIA T1F&CL	604.80	599.62 N&W	599.52	○
7	36.4' LT STA 38+77.0	INLETS TA T3F&G	604.20		599.72	●
9	36.2' LT STA 39+61.0	INLETS TA T3F&G	604.24		599.30	●
10	40.5' LT STA 41+51.0	MH TA 4' DIA T1F&CL	604.25	598.43	598.33	○
12	43.8' LT STA 41+83.1	INLETS TA T3F&G	603.62		599.10	●
13	77.0' LT STA 41+73.2	PRC FLAR END SEC 15"			598.15	▢

NOTE: POINTS 4, 8, & 11 ARE TEES.