


F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
55		MCLEAN	310	121 H
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT	
* (57-4)R, HBY, HBR, (57-4V)DM CONTRACT *70757				

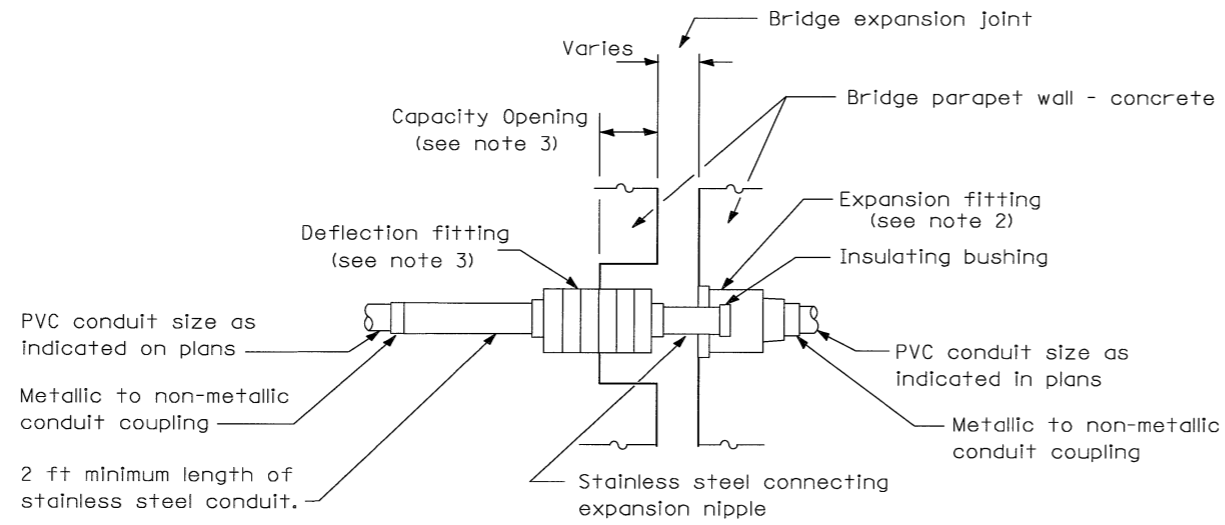

CONDUIT EXPANSION/
DEFLECTION COUPLING DETAIL

GENERAL NOTES

The Contractor shall install a conduit expansion/deflection coupling at the joints in the concrete parapet on the bridge capable of accepting the longitudinal movement. All metallic parts of the coupling shall be made of stainless steel or as approved by the Engineer. Any non-stainless metal shall be hot dip galvanized and coated to prevent reaction with the concrete. The cost of the coupling shall be part of and incidental to the conduit system.

The barrel in the expansion fitting shall be fully embedded in the concrete on one side of the expansion joint. One half the length of the deflection fitting shall be embedded in the concrete on the other side of the coupling.

A cavity opening 3" larger in diameter than the deflection fitting shall be provided in the concrete to ensure proper performance of the coupling.

Careful attention to joint movement over a range of temperatures shall be coordinated with the selection and installation of the coupling to ensure the range of movement of the coupling is not exceeded at temperature extremes.

All manufacturer's installation instructions shall be carefully followed to ensure optimum performance of the expansion/deflection coupling.

The Contractor shall install couplings at all bridge and median barrier wall expansion joints and shall be responsible to determine the proper number of couplings required.

CONDUIT COUPLING
EXPANSION/DEFLECTION

REVISIONS	
NAME	DATE



JOB NO.
94S2063
DATE
8/21/2009

LAYOUT	JHF	03/18/04
DRAWN	JHF	
REVIEWED	DJH	

8/21/2009
#FILE#