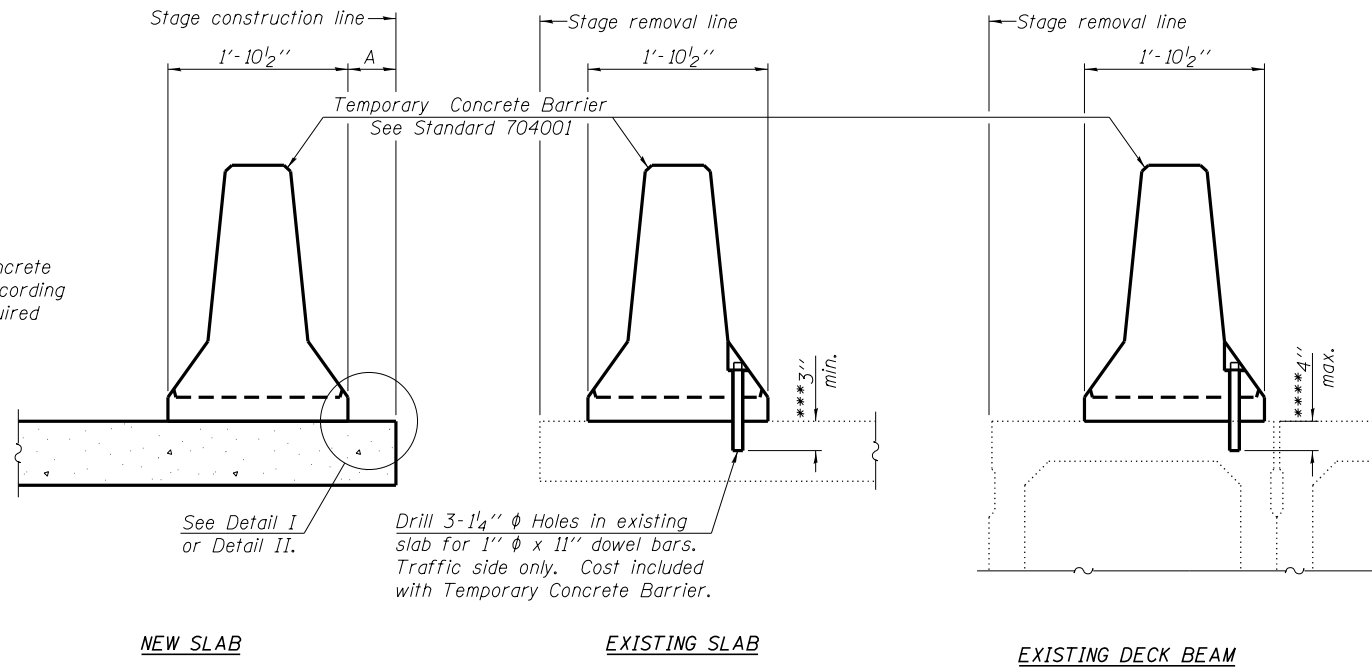When "A" is 3'-6" or less, the temporary concrete barrier shall be anchored to the new slab according to Detail I or Detail II. No anchorage is required when "A" is greater than 3'-6".

Stage construction line
1'-10½''    A
Temporary Concrete Barrier
See Standard 704001

See Detail I or Detail II.

Drill 3-1¼'' φ Holes in existing slab for 1'' φ x 11'' dowel bars. Traffic side only. Cost included with Temporary Concrete Barrier.

NEW SLAB

Stage removal line
1'-10½''
***3'' min.

EXISTING SLAB

Stage removal line
1'-10½''
****4'' max.

EXISTING DECK BEAM

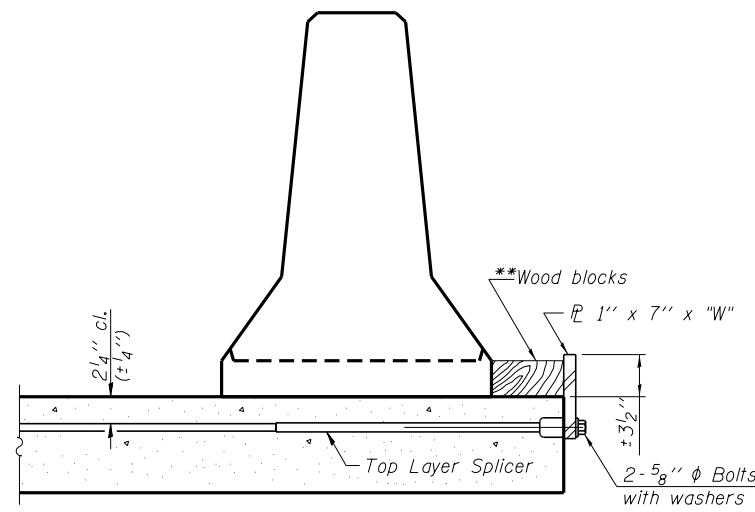SECTIONS THRU SLAB OR DECK BEAM

NOTES

Detail I - With Bar Splicer or Couplers:
   Connect one (1) 1'' x 7' 'x ''W'' steel ℙ to the top layer of couplers with 2-⅝'' φ bolts screwed to coupler at approximate ℄ of each barrier panel.
Detail II - With Extended Reinforcement Bars:
   Connect one (1) 1'' x 7'' x ''W'' steel ℙ to the concrete slab or concrete wearing surface with 2-⅝'' φ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate ℄ of each barrier panel.
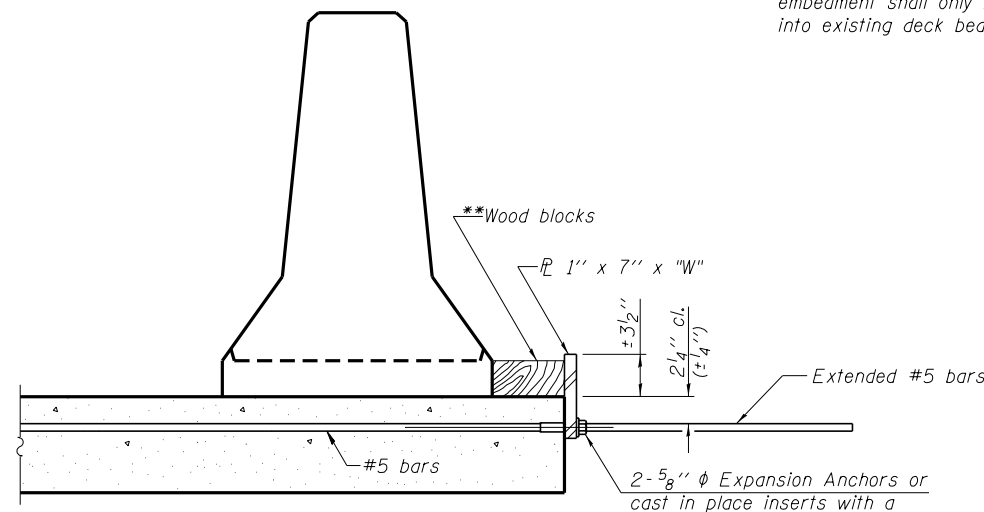Cost of anchorage is included with Temporary Concrete Barrier.
The 1'' x 7'' x ''W'' plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

*** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
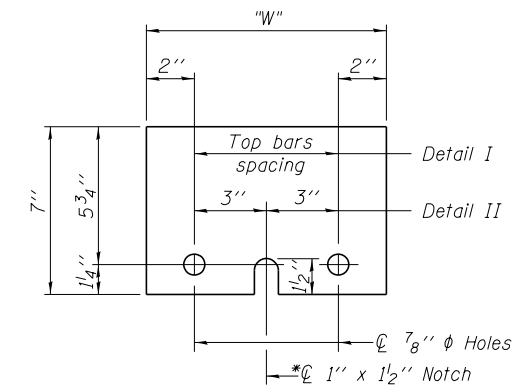
**** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

**Wood blocks
ℙ 1'' x 7'' x "W"
2¼'' cl. (± 4'')
±3½''
Top Layer Splicer
2-⅝'' φ Bolts with washers

DETAIL I

**Wood blocks
ℙ 1'' x 7'' x "W"
±3½''
2¼'' cl. (± 4'')
Extended #5 bars
#5 bars
2-⅝'' φ Expansion Anchors or cast in place inserts with a certified min. proof load of 5,000 Lbs.

DETAIL II

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4''

"W"
2''    2''
Top bars spacing
5¾''    3''    3''    Detail I
7''                    Detail II
1½''
℄ ⅞'' φ Holes
*℄ 1'' x 1½'' Notch

STEEL RETAINER ℙ 1'' x 7'' x ''W''

* Required only with Detail II

R-27        7-1-10

BLOOM COMPANIES, LLC
Infrastructure Innovation and Ingenuity
600 W. Fulton Street, Suite 701 • Chicago, IL 60661
Phone: (312) 876-8500    Fax: (312) 876-8600

USER NAME = carpentardj

| | | | REVISED |
|---|---|---|---|
| DESIGNED | - | BCM | REVISED |
| CHECKED | - | KO | REVISED |
| DRAWN | - | BCM | REVISED |
| CHECKED | - | 7/27/2012 | REVISED |

PLOT SCALE = N/A
PLOT DATE = 8/1/2014

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TEMPORARY BARRIER FOR STAGE CONSTRUCTION
STRUCTURE NO. 006-0140
SHEET NO. S4 OF S26 SHEETS

| F.A.P. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 613 | (8D-BR) BR | BUREAU | 63 | 26 |

CONTRACT NO. 66A17
ILLINOIS FED. AID PROJECT