

ROUTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NUMBER
VARIOUS	2008-053 BP	COOK	69	5

Contract 60F04

GENERAL NOTES FOR PAINT

LOCATION 9 (SN 016-0119)


ALL BEARINGS SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES OF THE FACIA BEAMS, INCLUDING STEEL SIDEWALK BRACKETS (WHICH INCLUDES BOTTOM OF SIDEWALK PLATE, OUTSIDE FACE OF DIAPHRAGM ON TOP OF FACIA GIRDER, AND ALL SURFACES OF FLOOR BEAMS EXTENDING PAST THE DIAPHRAGM), BEARING RISERS, TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FACIA BEAMS (SEE FIGURE 1), THE TOP AND BOTTOM OF THE BOTTOM FLANGE OF ALL INTERIOR BEAMS AND ALL LOWER HORIZONTAL BRACING SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. DO NOT CLEAN OR PAINT THE BEARING SUPPORT GRILLAGES.

LOCATION 12 (SN 016-2519)

ALL BEAMS, BEARINGS, AND OTHER STRUCTURAL STEEL WITHIN FIVE (5) FT., (MEASURED ALONG THE BEAM) OF EITHER SIDE OF ALL JOINTS, SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10. THE EXTERIOR SURFACES AND TOP AND BOTTOM OF THE BOTTOM FLANGE OF THE FACIA BEAMS (SEE FIGURE 1), AND ALL STEEL COLUMNS, STEEL PIERS, AND CROSS GIRDERS SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

LOCATION 8 (SN 016-0133)

ALL GIRDER AND STRINGER ENDS, DIAPHRAGMS, CROSS FRAMES, BRACING, AND STIFFENERS WITHIN TEN (10) FT., (MEASURED ALONG THE BEAM) OF EITHER SIDE OF PIER 16 (INCLUDING CROSS GIRDER G-5) AND PIER 18 (INCLUDING CROSS GIRDER G-7), SHALL BE CLEANED PER NEAR WHITE BLAST CLEANING SSPC-SP10.

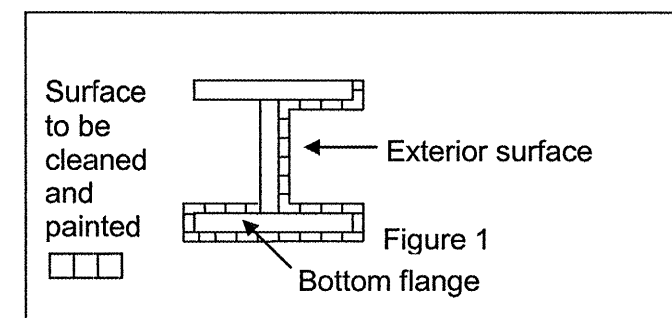

FASCIA BEAM PAINTING DETAIL

FIGURE 1

SHEET 2 OF 2

ILLINOIS DEPARTMENT OF TRANSPORTATION

GENERAL PAINT NOTES