


ROAD NAME	LOCATION
S5000W ROAD	LT. STA. 218+54.43 TO STA. 218+70.03
S4080W ROAD	LT. STA. 48+46.00 TO STA. 49+35.67
MONTEREY DRIVE	LT. STA. 70+63.78 TO STA. 71+69.00
S3160W ROAD	LT. STA. 88+50.00 TO STA. 89+35.91
N1790W ROAD	LT. STA. 130+71.81 TO STA. 131+31.37

ROAD NAME	LOCATION
S5000W ROAD	RT. STA. 218+54.43 TO STA. 218+70.03
S4080W ROAD	RT. STA. 48+46.00 TO STA. 49+35.67
MONTEREY DRIVE	RT. STA. 70+63.78 TO STA. 71+69.00
S3160W ROAD	RT. STA. 88+50.00 TO STA. 89+35.91
N1790W ROAD	RT. STA. 130+71.81 TO STA. 131+31.37

ROAD NAME	C	D
S5000W ROAD	24' & VARIES	12' & VARIES
S4080W ROAD	20' & VARIES	10' & VARIES
MONTEREY DRIVE	24'	12'
S3160W ROAD	16'	8'
N1790W ROAD	VARIES & 17.69'	VARIES

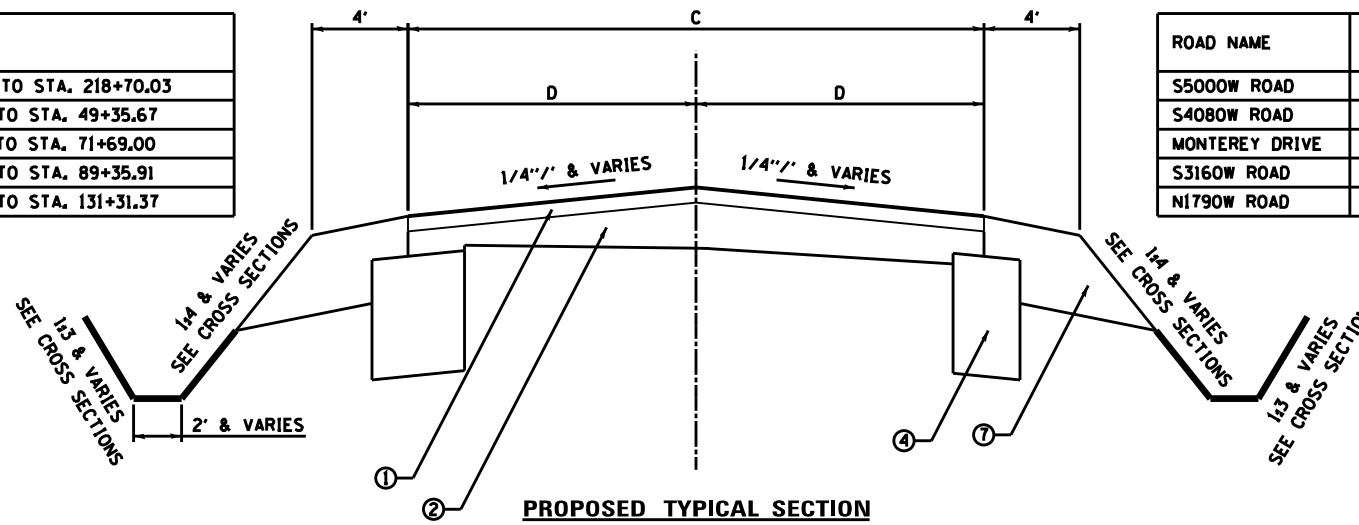


PROPOSED TYPICAL SECTION

ROAD NAME	LOCATION
RAYMOND DRIVE	LT. STA. 39+36.03 TO STA. 39+47.90
N3290W ROAD	LT. IL 17 TO STA. 82+10.00

ROAD NAME	LOCATION
RAYMOND DRIVE	RT. STA. 39+36.03 TO STA. 39+42.02
N3290W ROAD	RT. IL 17 TO STA. 82+10.00

ROAD NAME	C	D
RAYMOND DRIVE	VARIES	VARIES
N3290W ROAD	30' & VARIES	15' & VARIES

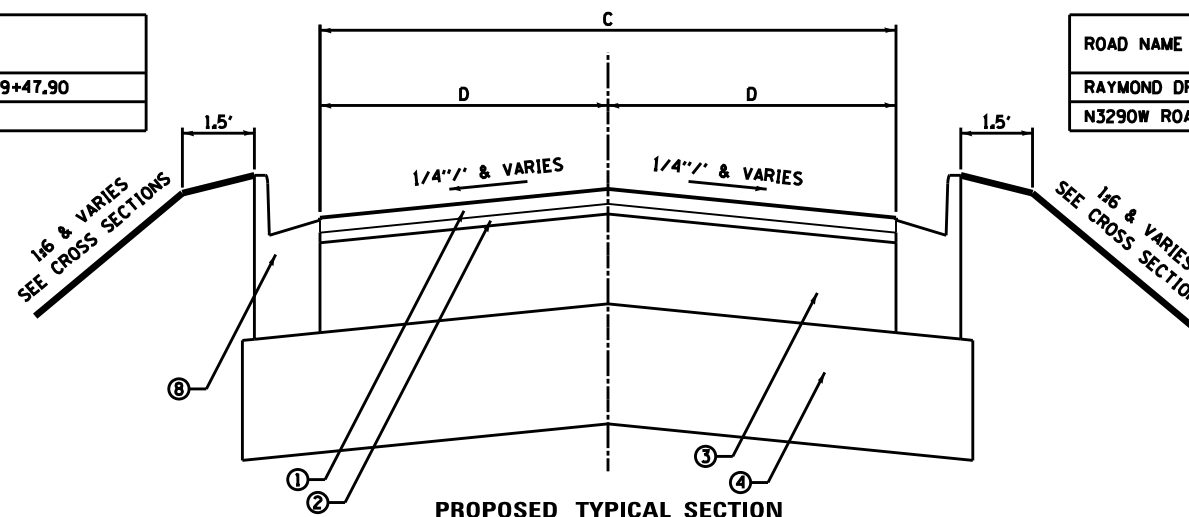


PROPOSED TYPICAL SECTION

ROAD NAME	LOCATION
RAYMOND DRIVE	LT. STA. 39+00 TO STA. 39+36.03

ROAD NAME	LOCATION
RAYMOND DRIVE	RT. STA. 39+00 TO STA. 39+36.03

ROAD NAME	C	D
RAYMOND DRIVE	28' & VARIES	14' & VARIES

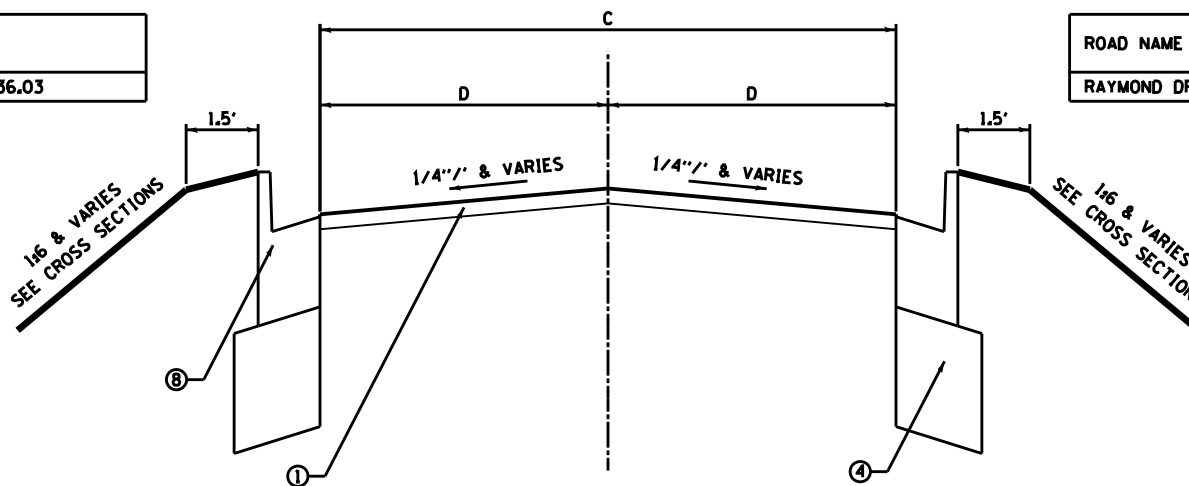

PROPOSED TYPICAL SECTION

- ① INCIDENTAL HOT-MIX SURFACING 1 1/2"
- ② LEVELING BINDER (MACHINE METHOD), NTO 1" MINIMUM
- ③ HOT-MIX ASPHALT BASE COURSE, 9"
- ④ SUBBASE GRANULAR MATERIAL, TYPE A 12"
- ⑤ HOT-MIX ASPHALT SHOULDERS 8"
- ⑥ SUBBASE GRANULAR MATERIAL, TYPE C
- ⑦ AGGREGATE SHOULDERS, TYPE B, 8"
- ⑧ COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.24

FOR ADDITIONAL PAVEMENT WIDTH INFORMATION SEE INTERSECTION DETAIL SHEETS.