

NOTES

Detail I - With Bar Splicer or Couplers: Connect one (1) 1" x 7" 'x "W" steel P to the top layer of couplers with 2- $\frac{5}{8}$ " ϕ bolts screwed to coupler at approximate & of each barrier panel.

Detail II - With Extended Reinforcement Bars:


Connect one (1) I'' x 7'' x 'W'' steel P to the concrete slab or concrete wearing surface with $2^{-\frac{5}{8}}$ " ϕ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The I'' x 7'' x ''W'' plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready


For Quantity of Temporary Concrete Barrier see Roadway Plans.

SECTIONS THRU SLAB OR DECK BEAM

- *** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

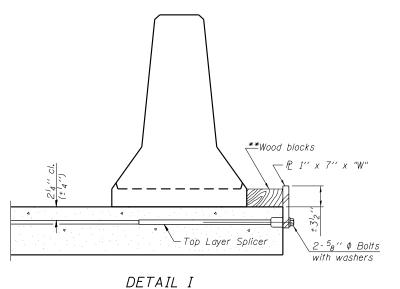




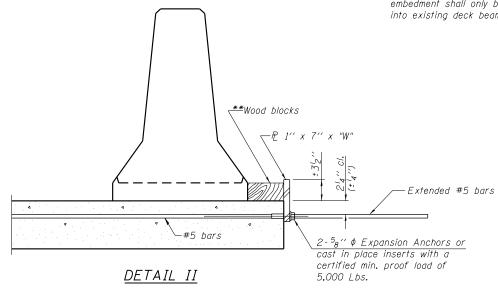

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.

"W" = Top bars spacing + 4"



STEEL RETAINER P 1" x 7" x "W"

* Required only with Detail II

Note: For Quantity of Temporary Concrete barriers see Roadway Plans.

R-27-1-10 NAME = 0600220&0221-76F10-05-Temporary_Barrier.dgn



or or gubban ter toger						
USER NAME = gehowley	Х	DESIGNED - SDG	REVISED -			
	Х	CHECKED - FAS	REVISED -			
PLOT SCALE = 0:2.0000 ':" / in.	Х	DRAWN - DMG	REVISED -			
PLOT DATE = 3/25/2013	Х	CHECKED - SDG	REVISED -			

A.I. TE.	SECTION		COUNTY	TOTAL SHEETS	SHEET NO.	
255	60-(8,9) RS-1		MADISON	206	155	
				CONTRACT	NO. 7	76F10
	ILLINOIS	FED.	AID	PROJECT		