ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
F. A.P. RTE. 774	107BY-1	EFFINGHAM	273	221
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT-		

SHEET NO. 21
26 SHEETS

CONTRACT NO. 94827

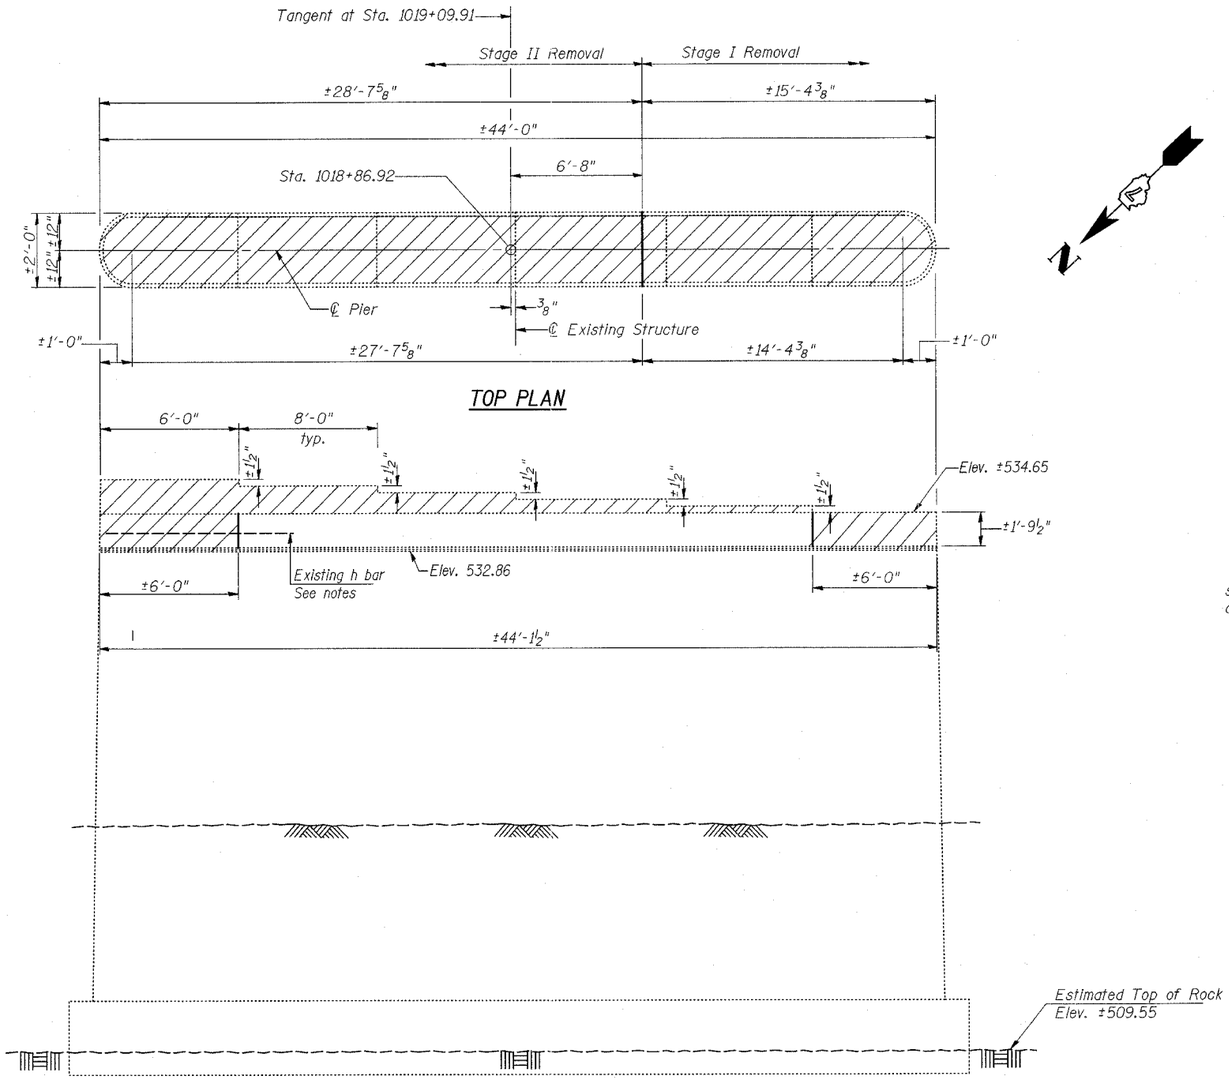

NOTES

Hatched areas indicate Concrete Removal.
Existing v and h bars extending into the new construction shall be cleaned, straightened and incorporated into the new construction. Cost included with Concrete Removal.

BILL OF MATERIAL

Item	Unit	Quantity
Concrete Removal	Cu. Yd.	2.5

END VIEW

ELEVATION
(Looking East)

SHEET TITLE
PIER CONCRETE REMOVAL

PROJECT
IL RTE. 32/33 OVER
LITTLE WABASH RIVER OVERFLOW
F.A.P. RTE. 774 SECTION 107BY-1
EFFINGHAM COUNTY
STATION 1018+86.92
STRUCTURE NO. 025-0077

PROJECT NO. 02017
SCALE
DATE
DRAWN BY TFC
CHECKED BY KPS/CME/MCB
DRAWING NO. 21 OF 26 SHTS

COOMBE-BLOXDORF P.C.
Engineers / Land Surveyors
Springfield, Illinois
Design Firm License No. 184-002703

pier-conc-removal