


## GENERAL NOTES

- 1. WHEN MEDIANS ARE PRESENT, PAVEMENT MARKINGS ARE TO BE PLACED ADJACENT TO MEDIANS.
- SOME OF THE INFORMATION INCLUDED WITH THIS DETAIL MAY NOT BE APPLICABLE TO THIS IMPROVEMENT.
- PAVEMENT MARKINGS ARE TO BE EXTENDED THROUGH OMISSIONS WHEN APPLICABLE.
- 4. A STRIPING KEY IS AVAILABLE ELSEWHERE AND SHALL BE SHOWN WHERE THE QUANTITIES ARE LISTED.
- 5. FINAL PAVEMENT MARKINGS SHALL BE IN PLACE PRIOR TO PLACING ANY RAISED REFLECTIVE PAVEMENT MARKERS.
- 6. THE FOLLOWING CRITERIA SHALL BE USED FOR SELECTING THE DIAGONAL PAVEMENT MARKING SPACING, <30 MPH USE 15' (<50 km/h USE 4.5 m) 30-45 MPH USE 20' (50-75 km/h USE 6.0 m) >45 MPH USE 30' (>75 km/h USE 9.0 m)

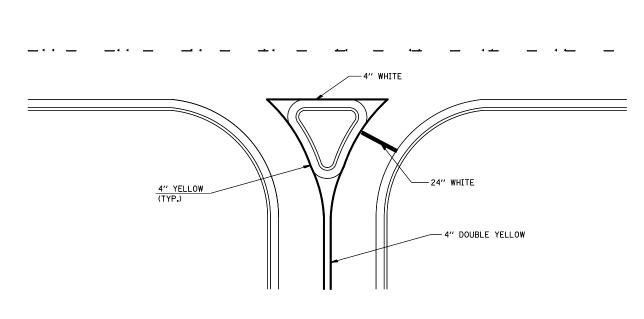


DATE

PLOT DATE = 3/21/2013

RIGHT IN - RIGHT OUT ACCESS

REVISED

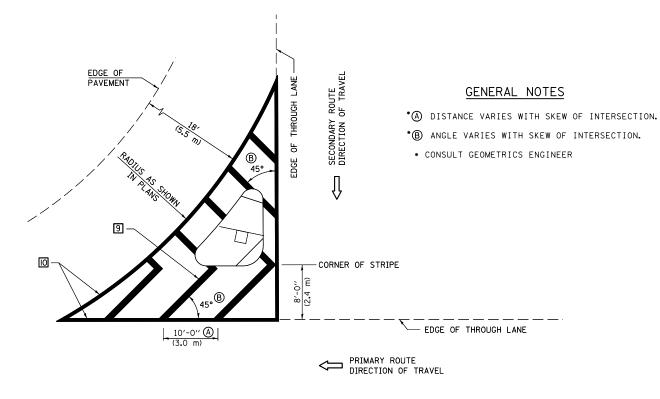

<u>ISLAND</u>

SHEET NO. 3 OF 4 SHEETS STA. ---- TO STA. ----

Note: All dimensions are in INCHES (millimeters) unless otherwise shown.

						DISTRICT 5 DETAIL NO. 7800AAAA				
FILE NAME =	USER NAME = avusuglob	DESIGNED -	REVISED - 11/06		PAVEMENT MARKING AND MARKERS	F.A.S. SECTION	ON NC	COUNTY	TOTAL S	HEET
c:\pw_work\pwidot\avusuglob\d0333684\D5	ØA15-sht-detaıl.dgn	DRAWN -	REVISED - 09/2009 - KJT	STATE OF ILLINOIS		525 (41,48,81	31)0	CHAMPAIGN	28	26
	PLOT SCALE = 40.0000 '/ in.	CHECKED -	REVISED -	DEPARTMENT OF TRANSPORTATION	(RURAL & URBAN APPLICATIONS)	,		CONTRACT	NO. 70	)A15

SCALE: