
## STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY		TOTAL	SHEET NO.	SHE
F.A.P. 322	12-1. BR	UNION		36	19	20
FED. ROAD DIST. NO. 7		ILLINOIS	FEO. AID PROJECT-			

EET NO. 3 SHEETS

Contract #98886

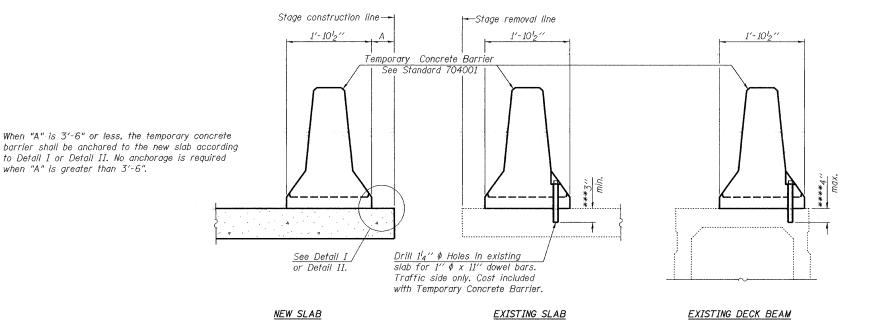

## **NOTES**

Detail I - With Bar Splicer or Couplers: Connect one (1) 1"x7"x10" steel £ to the

top layer of couplers with 2-58" \$\phi\$ bolts screwed to coupler at approximate & of each barrier panel.

Detail II - With Extended Reinforcement Bars: Connect one (1) 1"x7"x10" steel 12 to the concrete slab or concrete wearing surface with 2-5<sub>8</sub>"\$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement


Cost of anchorage is included with Temporary Concrete Barrier. The 1" x 7" x 10" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

at approximate © of each barrier panel.

## SECTIONS THRU SLAB OR DECK BEAM


\*\*\*Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.

\*\*\*\*If existing deck beam is to remain in place after stage construction, embedment shall only be into wearing surface and not into existing deck beam concrete.

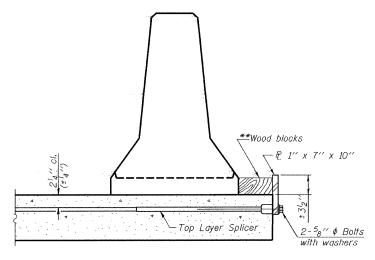


DETAIL I

when "A" is greater than 3'-6".

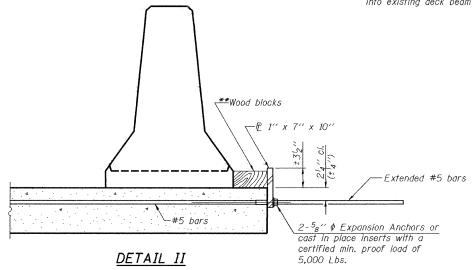

<sup>\*\*</sup>Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact with the steel retainer plate.



## STEEL RETAINER & 1" x 7" x 10"

\* Required only with Detail II

TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION F.A.P. ROUTE 322 - SECTION 12-1, BR UNION CO. STATION 801+60.00 STRUCTURE NO. 091-0022

DESIGNED Patrick M. Petrone CHECKED Jay D. Edwards DRAWN BECKY M. LEACH CHECKED PMP/JDE

9-3-07

R-27

...\projects\bml00029\0910022.dgn 07/22/2008 11:20:54 AM