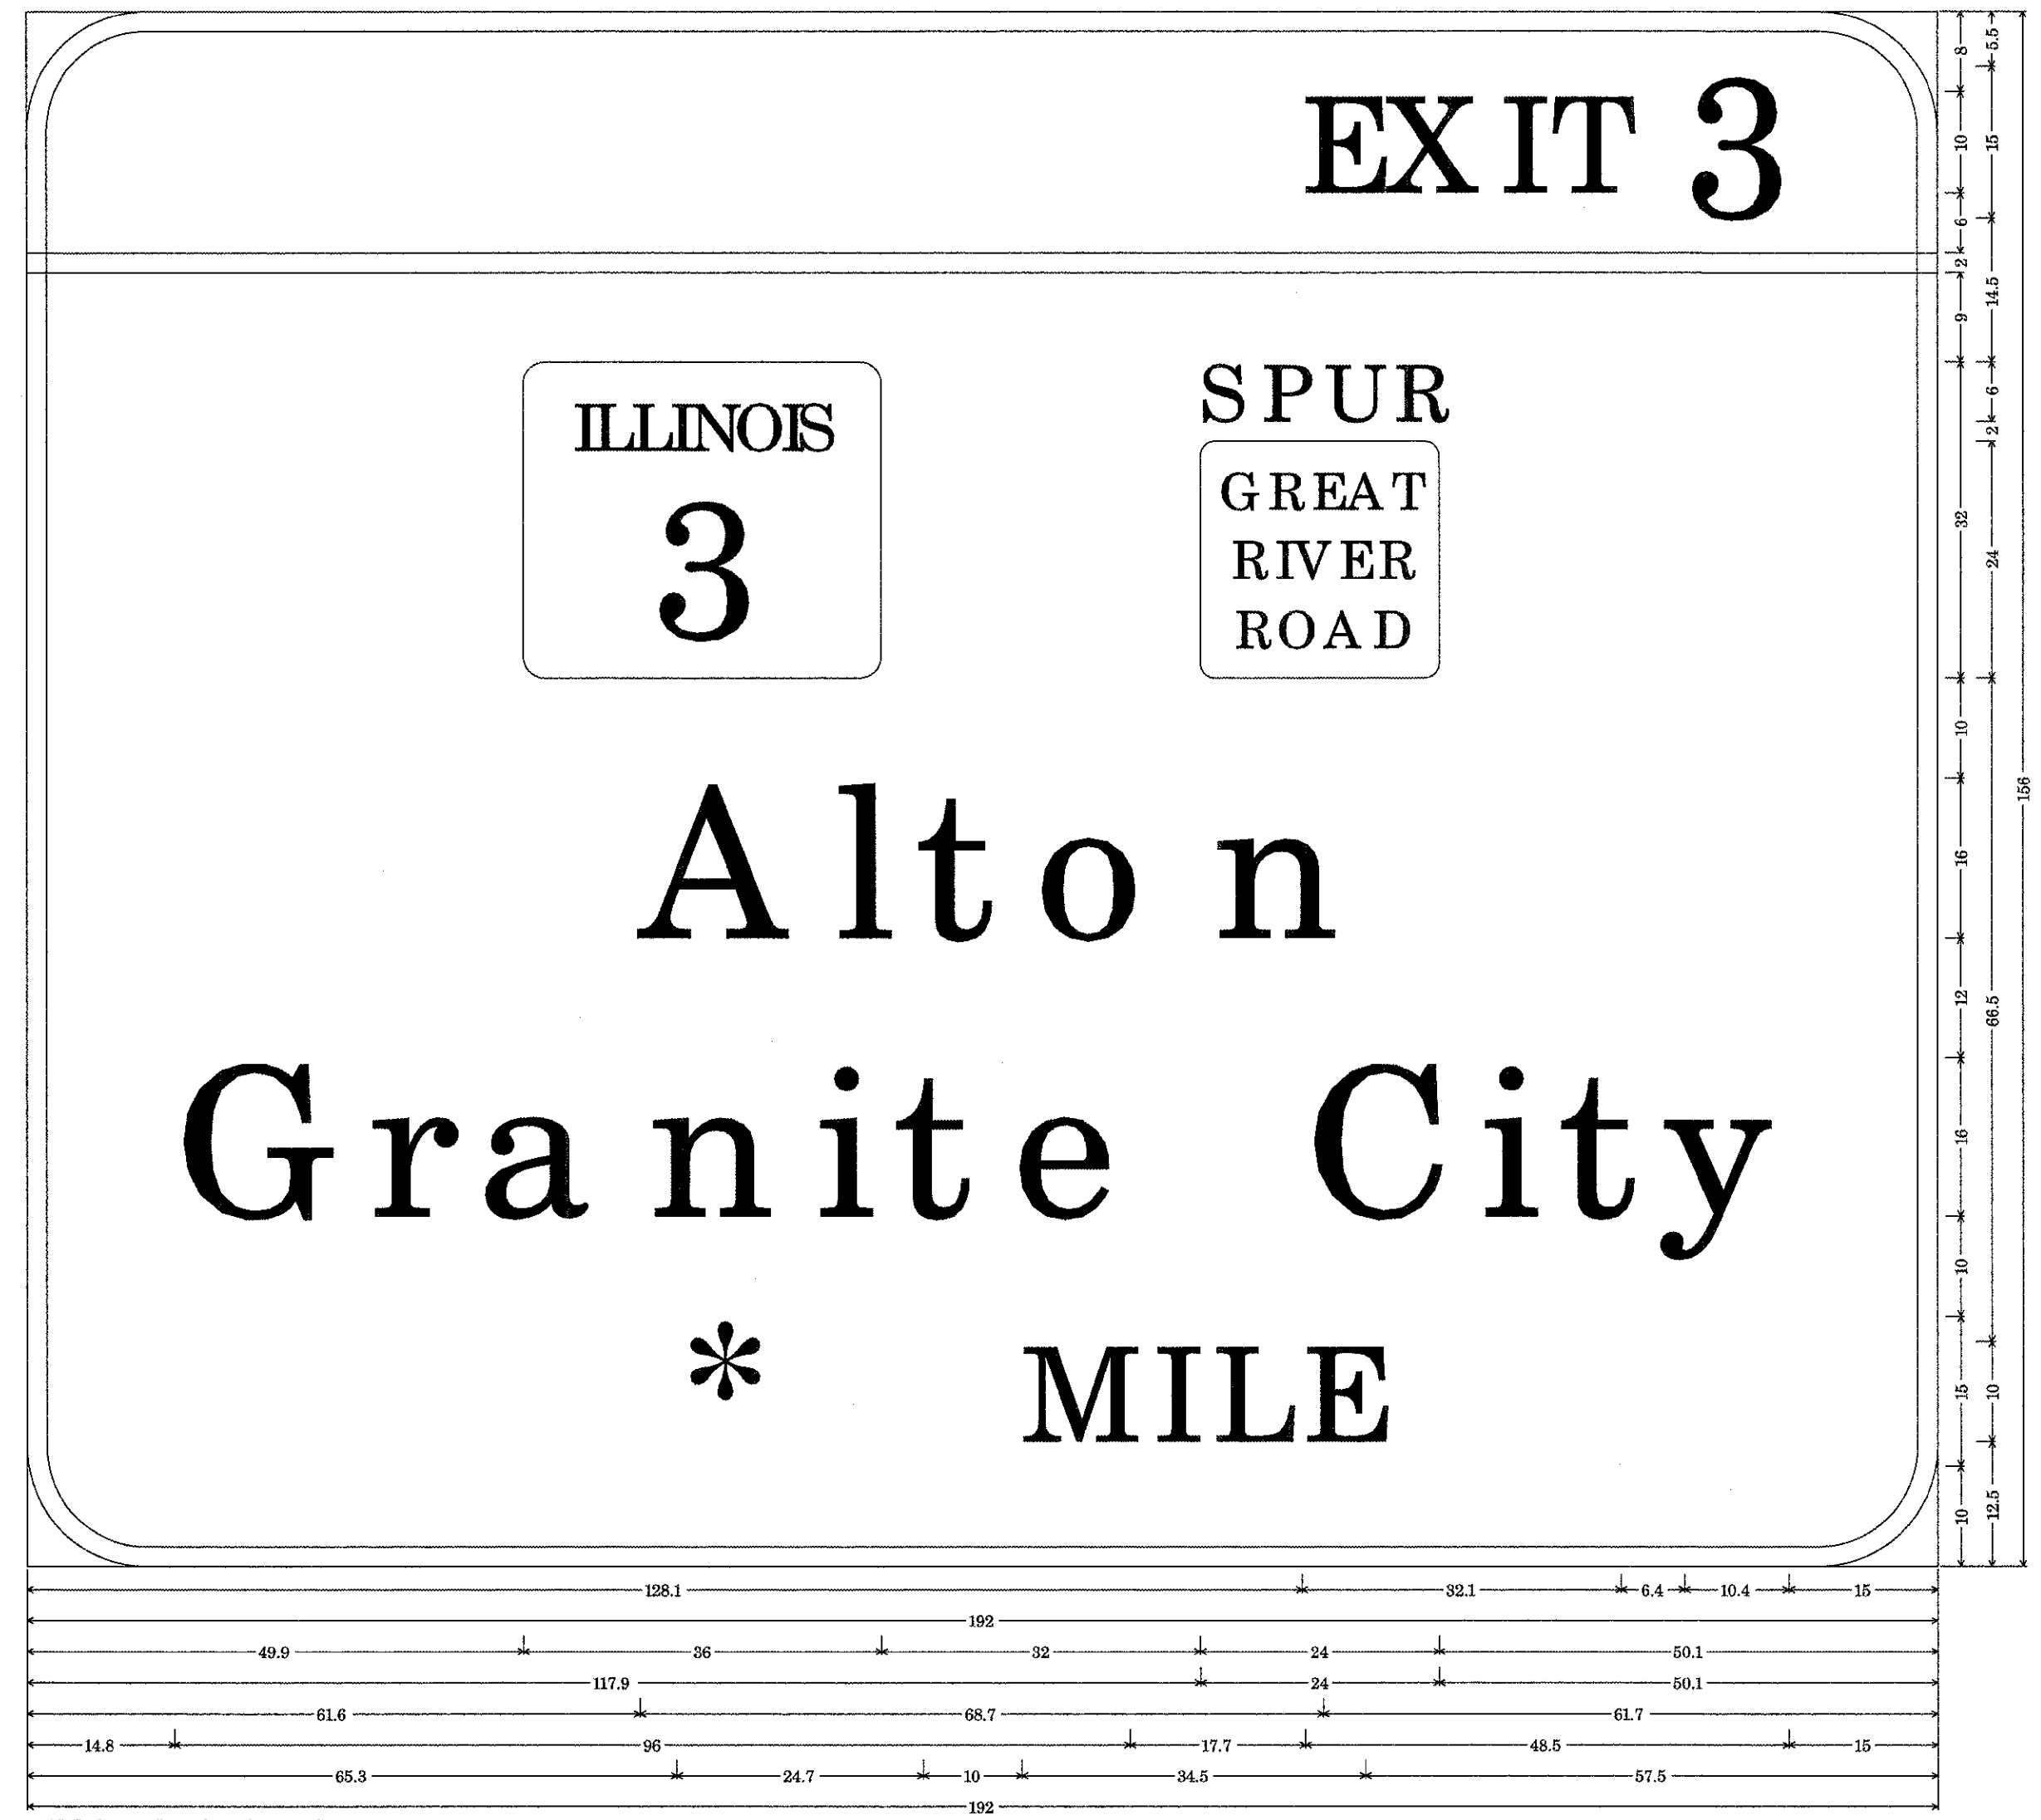

12.0" Radius, 2.0" Border, White on Green;
[EXIT 3] ClearviewHwy-5-W; [SPUR] ClearviewHwy-5-W 99} spacing; [Alton] ClearviewHwy-5-W; [Granite City] ClearviewHwy-5-W; [* MILE] ClearviewHwy-5-W;
Table of widths and spaces.

	E		X		I		T		3	
128.1	6.3	2.2	8.7	2.8	1.9	3.0	7.2	6.4	10.4	15.0

	—	
-0.0	192.0	0.0

	[shield]		S		P		U		R	
49.9	36.0	32.0	4.3	1.9	4.4	1.9	4.6	2.4	4.5	50.1

	[shield]	
117.9	24.0	50.1

	A		l		t		o		n	
61.6	15.0	4.5	5.1	3.1	7.9	4.1	12.4	5.4	11.2	61.7

	G		r		a		n		i		t		e		C		i		t		y	
14.8	13.9	5.7	7.3	3.7	11.9	5.1	11.1	5.7	3.8	4.1	7.8	4.2	11.7	17.7	13.0	4.5	3.8	4.1	7.8	2.8	12.5	15.0

	*		M		I		L		E	
65.3	24.7	10.0	9.2	3.9	2.0	4.0	5.9	3.2	6.3	57.5

LAST SAVED = 3/13/2010
PEN TABLE = V8.tbl
PLOT DRIVER = TR-Xerox6204-To-File.plt

FILE NAME =	USER NAME = sdonahue	DESIGNED -	REVISED -
ı:\0906600\0906601\cad\t_plans\072_D87	6D87-Sht-Sıgn-07.dgn	DRAWN -	REVISED -
	PLOT SCALE = 20.0009 ' / IN.	CHECKED -	REVISED -
	PLOT DATE = 3/16/2010 4:43:12 PM	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

HORNER & SHIFRIN, INC. ENGINEERS

SCALE: NONE

SIGNING DETAILS
SIGN PANELS

SHEET NO. 17 OF 17 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
270	60-2RS-3	MADISON	231	100
		CONTRACT NO. 76D87		

ILLINOIS | FED. AID PROJECT