



FOR MILLING AND RESURFACING

CONTRACT NO. 83952 COUNTY TOTAL SHEET NO 58 TO STA. FEG. 8040 SEST. 10. 7 BLIZHOIS FED. AND PROJECT M-8003(52 PROP. BIT. OR P.C.C.

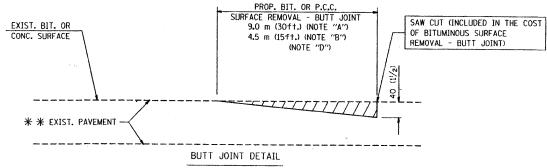

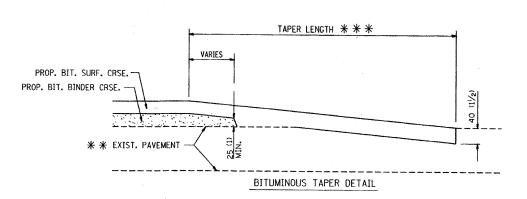

TYPICAL BUTT JOINT AND BITUMINOUS TAPER FOR RESURFACING ONLY

* * PC CONCRETE, BITUMINOUS OR BITUMINOUS RESURFACED PAVEMENT.

NOTES

A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.

B: MINOR SIDE ROADS.

BASIS OF PAYMENT:

C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING BITUMINOUS SURFACE.

D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED BITUMINOUS COURSES.

E: TAPER THE TEMP. RAMP AT A RATE OF 900 (3 ft.) PER INCH OF MILLING THICKNESS.

F: INSTALLATION AND REMOVAL OF THE 1.35 m (4.5') TEMP. BIT. RAMP WILL BE PAID AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT".

G: SEE ARTICLE 406.18 AND 406.24 OF THE STANDARD SPECIFICATIONS FOR "BITUMINOUS AND PCC SURFACE REMOVAL, BUTT JOINT".

st see typical sections for milling thickness.

THE BUTT JOINT WILL BE PAID FOR PER SOUARE METER (SOUARE YARD.)

AS "BITUMINOUS SURFACE REMOVAL - BUTT JOINT" OR "HOT-MIX ASPHALT SURFACE AS "PORTLAND CEMENT CONCRETE SURFACE REMOVAL - BUTT REMOVAL - BUTT JOINT" JOINT".

** ** * 6.1 m (20") PER 25 (1) RESURFACING (NOTE "A") 3.0 m (10') PER 25 (1) RESURFACING (NOTE "B") ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE SHOWN.

ILLINOIS DEPARTMENT OF TRANSPORTATION

BUTT JOINT AND BITUMINOUS TAPER DETAILS

SCALE: NONE

R. SHAH

DRAWN BY CHECKED BY

BD400-05 (VI=BD32)