

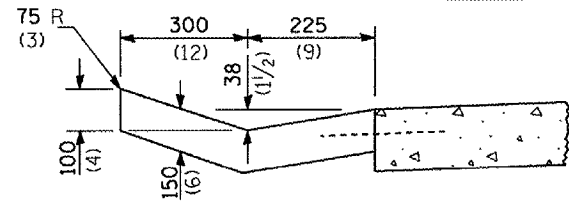
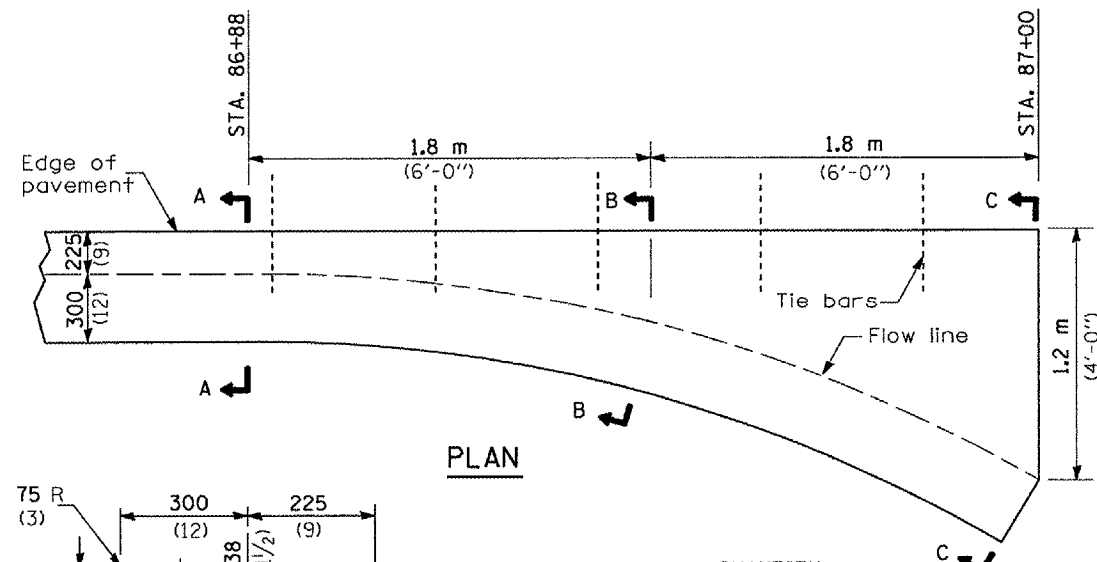


F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
2244	1107B/BR	STARK	39	11
STA.		TO STA.		
FED. ROAD DIST. NO.		ILLINOIS FED. AID PROJECT		

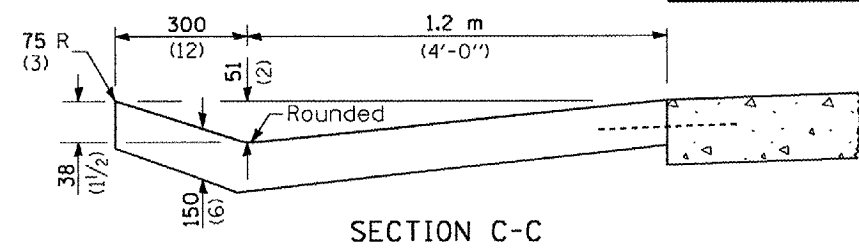

QUANTITY
Section C-C to A-A
0.49 m³ (0.64 cu. yd.)
concrete.

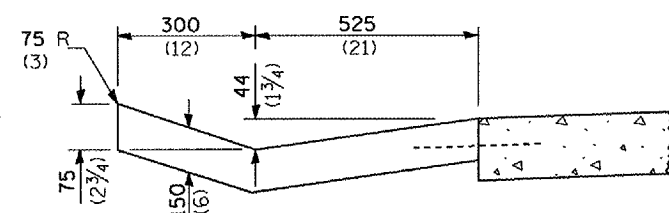

INLET

GENERAL NOTES

Tie bars shall be No. 19 (No. 6) at 600 mm (24") centers unless otherwise shown.

Gutter, gutter inlet, gutter outlet and gutter entrance shall be tied to the pavement in accordance with details for longitudinal construction joint shown on Standard 420001.

Two 32 mm x 450 mm (1-1/4" x 18") dowel bars shall be installed in all joints when the gutter is constructed adjacent to flexible pavement.

All dimensions are in millimeters (inches) unless otherwise shown.

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

TYPE B GUTTER
(INLET & OUTLET)

SCALE: VERT.
HORIZ.
DATE

(Sheet 1 of 2)

DRAWN BY
CHECKED BY

MODIFIED STANDARD 606201-01

PLOT DATE: 1/21/2008
 PLOT SCALE: 2:3000 / 1" IN.
 USER NAME: ch1
 STANDARD DETAILS MODIFIED