



When road classification only is on the second line, it should not be abbreviated.

TYPICAL SIGN STYLES

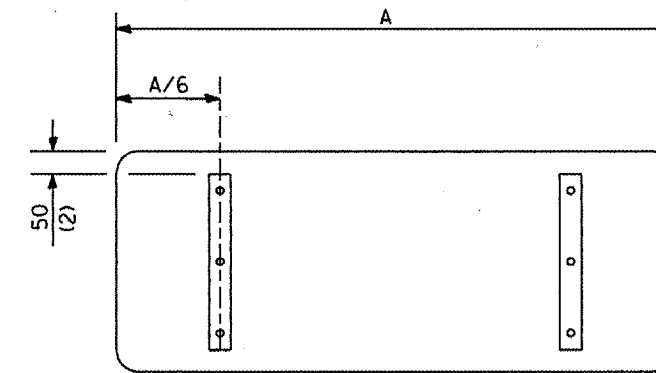

SUPPORTING CHANNELS

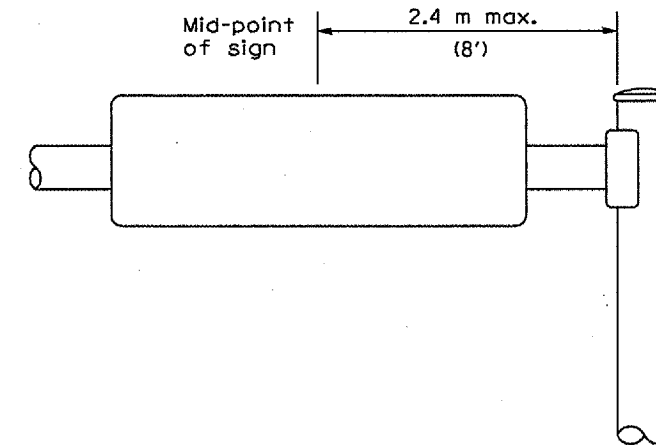

MOUNTING LOCATION

GENERAL NOTES

All signs shall have a white reflectorized legend and border on a green reflectorized background.

The sign panels shall be mounted as shown on Standard 720001 or as specified in the plans.

All dimensions are in millimeters (inches) unless otherwise shown.

SIGN STYLE	DIMENSIONS								LETTER SIZE						BORDER
									UPPER CASE PRIMARY			UC / LC PRIMARY			
	A	B	C	D	E	F	G	H	1	2	*	1	2	*	
a,b,d	Var.	450 (18)	40 (1.50)	150 (6)	150 (6)	-	-	-	150D (6D)	-	-	150/115 (6/4.5)	-	-	15 (0.6)
c,e	Var.	600 (24)	40 (1.50)	150 (6)	-	-	175 (7)	100 (4)	150D (6D)	-	75D (3D)	150/115 (6/4.5)	-	75D (3D)	15 (0.6)
a,b,d	Var.	600 (24)	40 (1.50)	200 (8)	200 (8)	-	-	-	200D (8D)	-	-	200/150 (8/6)	-	-	15 (0.6)
f	Var.	750 (30)	60 (2.25)	150 (6)	165 (6.5)	125 (5)	-	-	150D (6D)	150D (6D)	-	150/115 (6/4.5)	150/115 (6/4.5)	-	20 (0.8)
c,e	Var.	750 (30)	60 (2.25)	200 (8)	-	-	230 (9)	115 (4.5)	200D (8D)	-	100D (4D)	200/150 (8/6)	-	100D (4D)	20 (0.8)
a,b,d	Var.	750 (30)	60 (2.25)	250 (10)	250 (10)	250 (10)	-	-	250D (10D)	-	-	250/190 (10/7.5)	-	-	20 (0.8)
c,e	Var.	900 (36)	60 (2.25)	250 (10)	-	-	280 (11)	125 (5)	250D (10D)	-	125D (5D)	250/190 (10/7.5)	-	125D (5D)	20 (0.8)
f	Var.	1000 (40)	75 (3.00)	200 (8)	215 (8.5)	120 (7)	-	-	200D (8D)	200D (8D)	-	200/150 (8/6)	200/150 (8/6)	-	20 (0.8)
f	Var.	1200 (48)	75 (3.00)	250 (10)	250 (10)	200 (8)	-	-	250D (10D)	250D (10D)	-	250/190 (10/7.5)	250/190 (10/7.5)	-	20 (0.8)

* Supplemental Messages

MAST ARM MOUNTED
 STREET NAME SIGNS

STANDARD 720016-01