


CRAWFORD AVE.  
EXISTING TYPICAL SECTION  
STA. 19+19 TO STA. 23+82

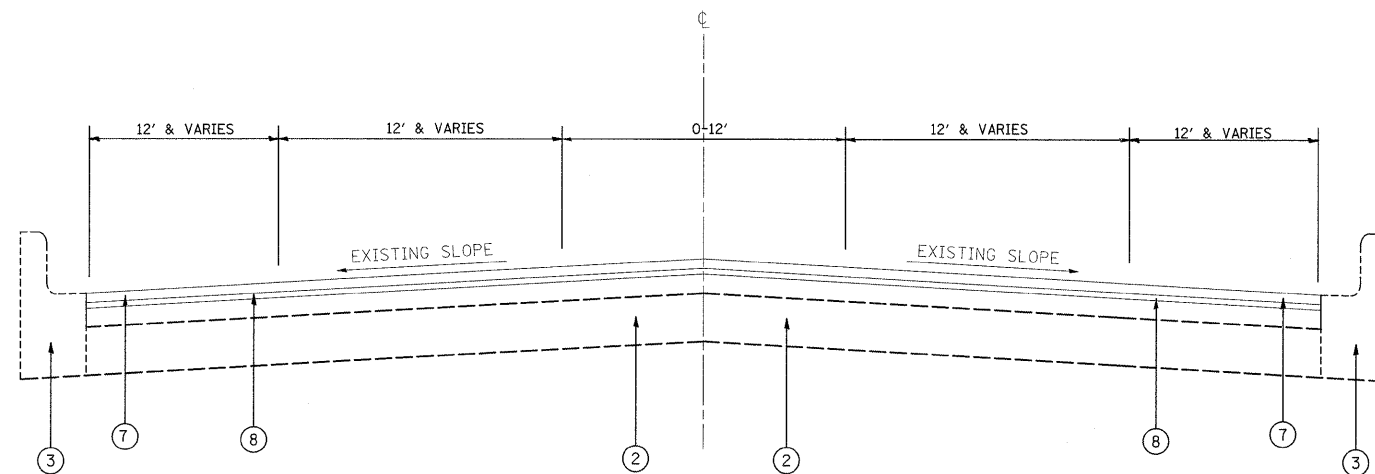

CRAWFORD AVE.  
PROPOSED TYPICAL SECTION  
STA. 19+19 TO STA. 23+82

**LEGEND**

- ① EXISTING HOT-MIX ASPHALT SURFACE, 7 1/4" (+/-)
- ② EXISTING P.C.C. BASE COURSE, 8" (+/-)
- ③ EXISTING COMBINATION CONCRETE CURB & GUTTER, TYPE B-6.12
- ④ EXISTING HOT-MIX ASPHALT SHOULDER,
- ⑤ EXISTING AGGREGATE SHOULDER
- ⑥ PROPOSED HOT-MIX ASPHALT SURFACE REMOVAL, 2 1/4"
- ⑦ PROPOSED HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70, 1 1/2"
- ⑧ PROPOSED POLYMERIZED LEVELING BINDER (MACHINE METHOD), IL-4.5, N50, 3/4"
- ⑨ PROPOSED AGGREGATE WEDGE SHOULDER, TYPE B
- ⑩ PROPOSED GRADING AND SHAPING SHOULDERS

**NOTE:**

MILLING TO BE DONE PRIOR TO PATCHING.

HOT-MIX ASPHALT MIXTURE REQUIREMENTS		
MIXTURE TYPE	AC TYPE	AIR VOIDS(%)
<b>PAVEMENT RESURFACING</b>		
HOT-MIX ASPHALT SURFACE COURSE, MIX "D", N70 (IL-9.5MM)	PG 64-22	4% @ 70 GYR.
POLYMERIZED LEVELING BINDER (MM), IL-4.75, N50	SBS/SBR PG 76-28/-22	4% @ 50 GYR.
<b>PATCHING</b>		
CLASS D PATCHES TYPE II, III & IV, 13", HMA BINDER IL-19 MM	PG 64-22*	4% @ 70 GYR.

\* WHEN RAP EXCEEDS 20%, THE NEW ASPHALT BINDER IN THE MIX SHALL BE PG 58-22.

NOTE: THE UNIT WEIGHT USED TO CALCULATE ALL HOT-MIX ASPHALT SURFACE MIXTURE QUANTITIES IS 112 LBS/SQ YD/IN.