CONTRACT NO. 64C26

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
316	101TS	LEE	9	6
STA.	TO STA.			
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

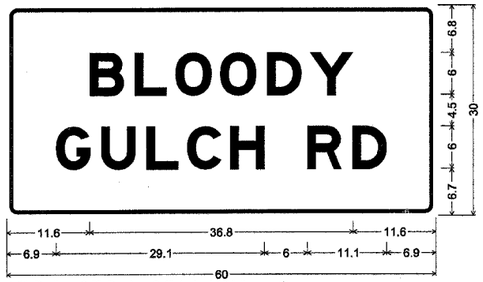

1.5" Radius, 0.5" Border, 0.4" Indent, White on Green;
[BLOODY] E Mod; [GULCH RD] E Mod;
Table of letter and object lefts.

B	L	O	O	D	Y
11.6	17.9	23.6	29.8	36.4	42.4

G	U	L	C	H	R	D
6.9	13.2	19.5	25.2	31.2	42.0	48.3

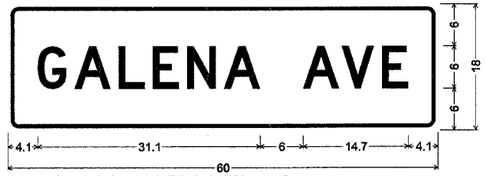

1.5" Radius, 0.5" Border, 0.4" Indent, White on Green;
[GALENA AVE] D;
Table of letter and object lefts.

G	A	L	E	N	A	A	V	E
4.1	9.3	15.4	20.2	25.0	30.2	41.2	46.6	52.2

LEGEND

- EXISTING CONTROLLER
- NEW CONTROLLER
- EXISTING ALUMINUM MAST ARM ASSEMBLY AND POLE
- NEW ALUMINUM MAST ARM ASSEMBLY AND POLE
- EXISTING STEEL MAST ARM ASSEMBLY AND POLE
- NEW STEEL MAST ARM ASSEMBLY AND POLE
- EXISTING SIGNAL HEAD AND POST
- NEW SIGNAL HEAD AND POST
- EXISTING SIGNAL HEAD
- NEW SIGNAL HEAD WITH BACKPLATE
- EXISTING PEDESTRIAN HEAD
- NEW PEDESTRIAN HEAD
- PEDESTRIAN PUSHBUTTON
- EXISTING HANDHOLE
- NEW HANDHOLE
- NEW JUNCTION BOX
- NEW HEAVY-DUTY HANDHOLE
- NEW DOUBLE HANDHOLE
- (5'-2") EXISTING CONDUIT (LENGTH AND SIZE)
- 5'-T NEW LUMINAIRE
- 2"GS-PVC NEW GALVANIZED STEEL OR PVC CONDUIT

UPPER NUMERAL INDICATES LENGTH
"T" INDICATES CONDUIT IN TRENCH
"P" INDICATES CONDUIT PUSHED
LOWER NUMERAL INDICATES SIZE AND TYPE

REVISIONS NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SCALE: VERT. HORIZ.
DATE
DRAWN BY
CHECKED BY

PLOT DATE = Wed Mar 29 08:17:48 2006
FILE NAME = P:\Projects\BLOODY GULCH 64C26\the i1 26.BG plans.dgn
PLOT SCALE = 20.0000 ' / IN.
USER NAME = rwiki