


## TYPICAL BUTT JOINT AND HMA TAPER FOR MILLING AND RESURFACING

BUTT JOINT AND

HMA TAPER

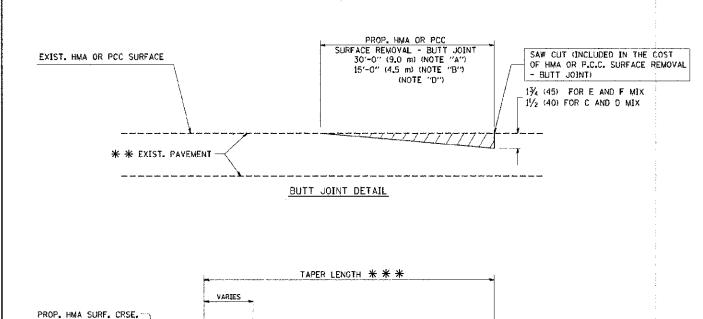

## TYPICAL BUTT JOINT AND HMA TAPER FOR RESURFACING ONLY

HMA TAPER DETAIL

\* \* PC CONCRETE, HMA OR HMA RESURFACED PAVEMENT.

来 来 EXIST. PAVEMENT

## NOTES

- A: MAINLINE ROADWAYS AND MAJOR SIDE ROADS.
- B: MINOR SIDE ROADS.

PROP. HMA BINDER CRSE.

- C: THE TEMP. RAMP SHALL BE CONSTRUCTED IMMEDIATELY UPON REMOVAL OF THE EXISTING HMA SURFACE.
- D: THE BUTT JOINT SHALL BE CONSTRUCTED IMMEDIATELY PRIOR TO PLACING THE PROPOSED HMA COURSES.
- E: TAPER THE TEMP. RAMP AT A RATE OF 3'-0" (900 mm) PER 1 INCH (25 mm) OF MILLING THICKNESS.
- F: INSTALLATION AND REMOVAL OF THE 4'-6" (1.35 m) TEMP, RAMP IS INCLUDED IN COST OF HMA SURFACE REMOVAL BUTT JOINT
- G: SEE ARTICLE 406.08 AND 406.14 OF THE STANDARD SPECIFICATIONS FOR "HMA AND/OR PCC SURFACE REMOVAL, BUTT JOINT".
- \* SEE TYPICAL SECTIONS FOR MILLING THICKNESS.

## BASIS OF PAYMENT:

THE BUTT JOINT WILL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQUARE YARD (SQUARE METER) FOR "HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT" OR FOR "PORTLAND CEMENT CONCRETE SURFACE REMOVAL- BUTT JOINT".

ALL DIMENSIONS ARE IN INCHES CVILLIMETERS) UNLESS OTHERWISE SHOWN.

1兆 (45) FOR E AND F MIX

1/2 (40) FOR C AND D MIX

25 F	FILE NAME =	USER NAME = geglienobt	DESIGNED - M.	DE YONG	REVISED	- R	SHAH 10-25-94		1	
62- 8-28-	W:\distatd\22x34\bd32.agn		DRAWN -		REVISED	- A.	. ABBAS 03-21-97	STATE OF ILLINOIS		
PYBIO- A7E O SMCG		PLOT SCALE = 50.0000 // IN.	CHECKED -		REVISED	- M	GOMEZ 04-06-01	DEPARTMENT OF TRANSPORTATION		
912.38		PLDT DATE = 1/4/2008	DATE - 06	6-13-90	REVISED	- R	. BORO 01-01-07		SCALE: NONE	SHEET
•							·			