92677

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
322	11-10	CHRISTIAN	310	164
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

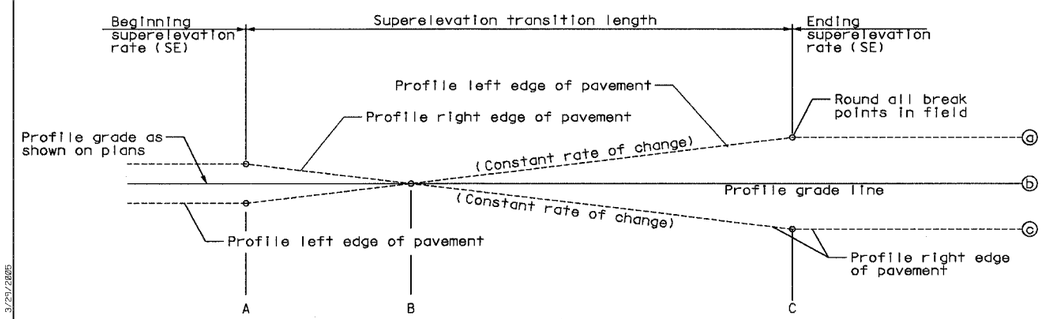

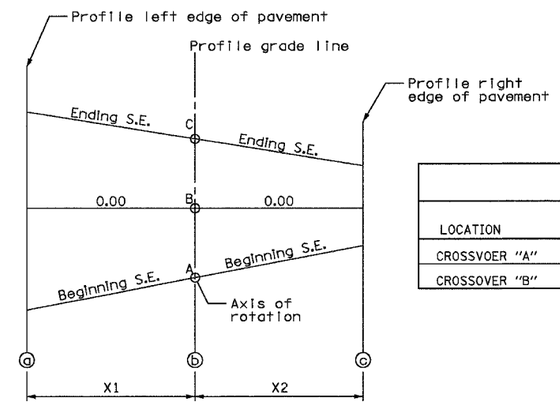

Note: Right or left edge of pavement may be located on profile grade line

SUPERELEVATION TRANSITION CURVE DATA							
LOCATION	X1	X2	BEGINNING S.E.	ENDING S.E.	PROFILE BREAK POINTS		
					A	B	C
CROSSVOER "A"	12'	12'	-1.5%	1.5%	206+45	206+85	207+25
CROSSOVER "B"	4'	16'	-1.5%	1.5%	14+89	15+55.5	16+22

AXIS OF ROTATION ABOUT PROFILE GRADE BASELINE

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

SUPERELEVATION RUNOFF TABLES
2 LANE & CROSSOVERS
FAP 322 (US 51)
SECTION 11-1
CHRISTIAN COUNTY

SCALE: NONE DRAWN BY SEB
DATE 3/21/05 CHECKED BY EBB

3/29/2005

g:\81files\81813259\cor-tbplans\164ed82.dgn