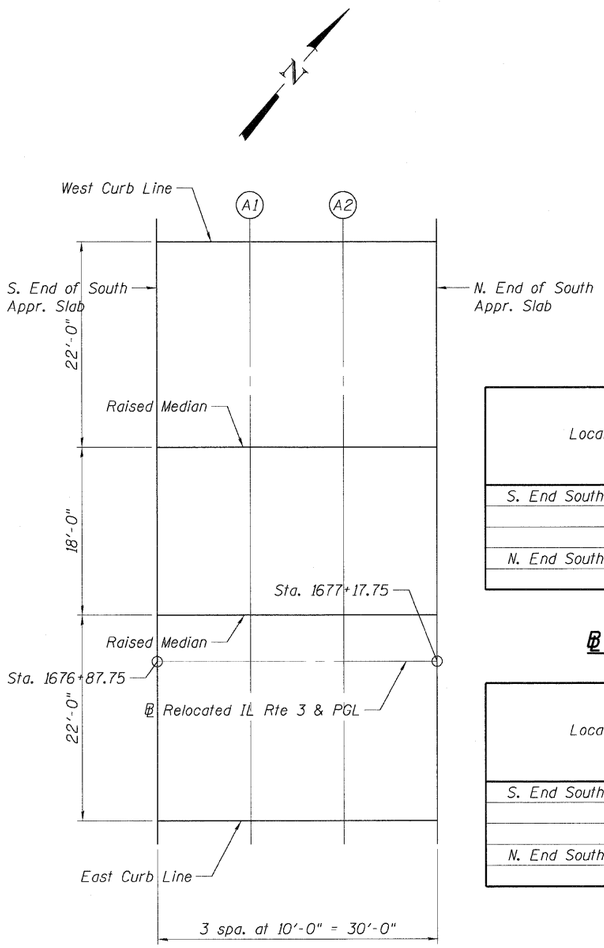

PLAN

South Approach
(Not in contract, for information only)

WEST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
S. End South Appr. Slab	1676+87.75	-45.00	439.69
A1	1676+97.75	-45.00	440.06
A2	1677+07.75	-45.00	440.42
N. End South Appr. Slab	1677+17.75	-45.00	440.77

℄ RELOCATED IL RTE 3 & PGL

Location	Station	Offset	Theoretical Grade Elevations
S. End South Appr. Slab	1676+87.75	0.00	440.59
A1	1676+97.75	0.00	440.96
A2	1677+07.75	0.00	441.32
N. End South Appr. Slab	1677+17.75	0.00	441.67

EAST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
S. End South Appr. Slab	1676+87.75	17.00	440.25
A1	1676+97.75	17.00	440.62
A2	1677+07.75	17.00	440.98
N. End South Appr. Slab	1677+17.75	17.00	441.33

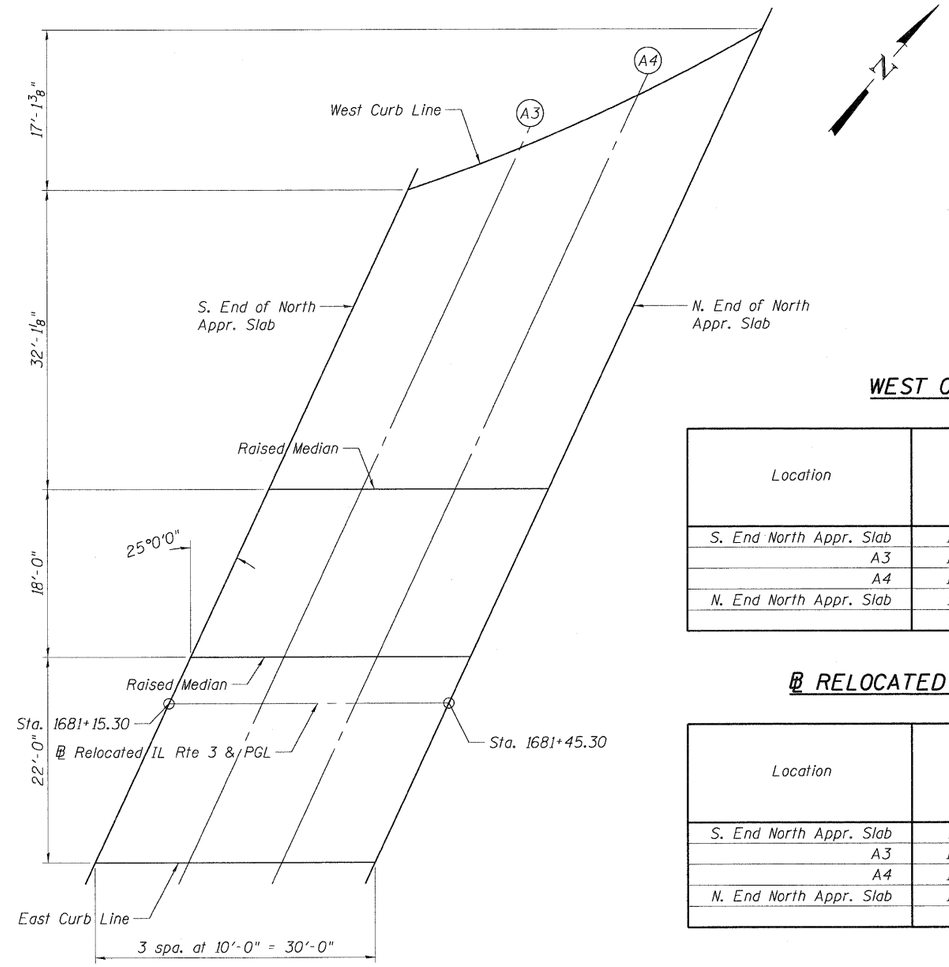

PLAN

North Approach

WEST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
S. End North Appr. Slab	1681+40.99	-55.10	446.89
A3	1681+53.06	-59.51	446.80
A4	1681+65.67	-65.11	446.68
N. End North Appr. Slab	1681+78.98	-72.21	446.44

℄ RELOCATED IL RTE 3 & PGL

Location	Station	Offset	Theoretical Grade Elevations
S. End North Appr. Slab	1681+15.30	0.00	448.22
A3	1681+25.30	0.00	448.20
A4	1681+35.30	0.00	448.17
N. End North Appr. Slab	1681+45.30	0.00	448.13

EAST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
S. End North Appr. Slab	1681+07.38	17.00	447.89
A3	1681+17.38	17.00	447.88
A4	1681+27.38	17.00	447.86
N. End North Appr. Slab	1681+37.38	17.00	447.82

..\DBCONN-10-ALIGNMENT1.DGN,..\0820329-CONN-10-001-TL.DGN,..\0820318-CONN-99-001-BD.DGN
5-11-2011, 9:55:52 NEWMANMD \\FS-0044\AM\VAULT_D-TRANS_07\2202\20868-001\STRUCT\CAD\01 DESIGN\0820329\SHEET\0820329-CONN-10-006-SHT-SP.DGN

FILE NAME = $FILEL$	USER NAME = $USER$	DESIGNED - TCG	REVISED -
		DRAWN - TCG	REVISED -
TENG TENG & ASSOCIATES, INC. ENGINEERS/ARCHITECTS/PLANNERS CHICAGO, ILLINOIS	PLOT SCALE = $SCALE$	CHECKED - JLR	REVISED -
	PLOT DATE = $DATE$	DATE - 05/13/11	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
IL 3 OVER
TRRA & ST. CLAIR AVENUE

TOP OF APPROACH SLAB ELEVATIONS

SCALE: | SHEET NO. SB-9 OF SB-63 | STA. 1679+16.65 TO STA.

F.A.P RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
998	82-2-1HVB-1	ST. CLAIR	345	201
	SN 082-0329	CONTRACT NO. 76D05		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		