CONTRACT NO. 60C19

| | | | | |
|---|---|---|---|---|
| 338 | 114 BY-R-1 | WILL | 139 | 115 |
| STA. | | TO STA. | | |
| FED. ROAD DIST. NO. | ILLINOIS | FAP 338 (IL RTE. 59) | | |

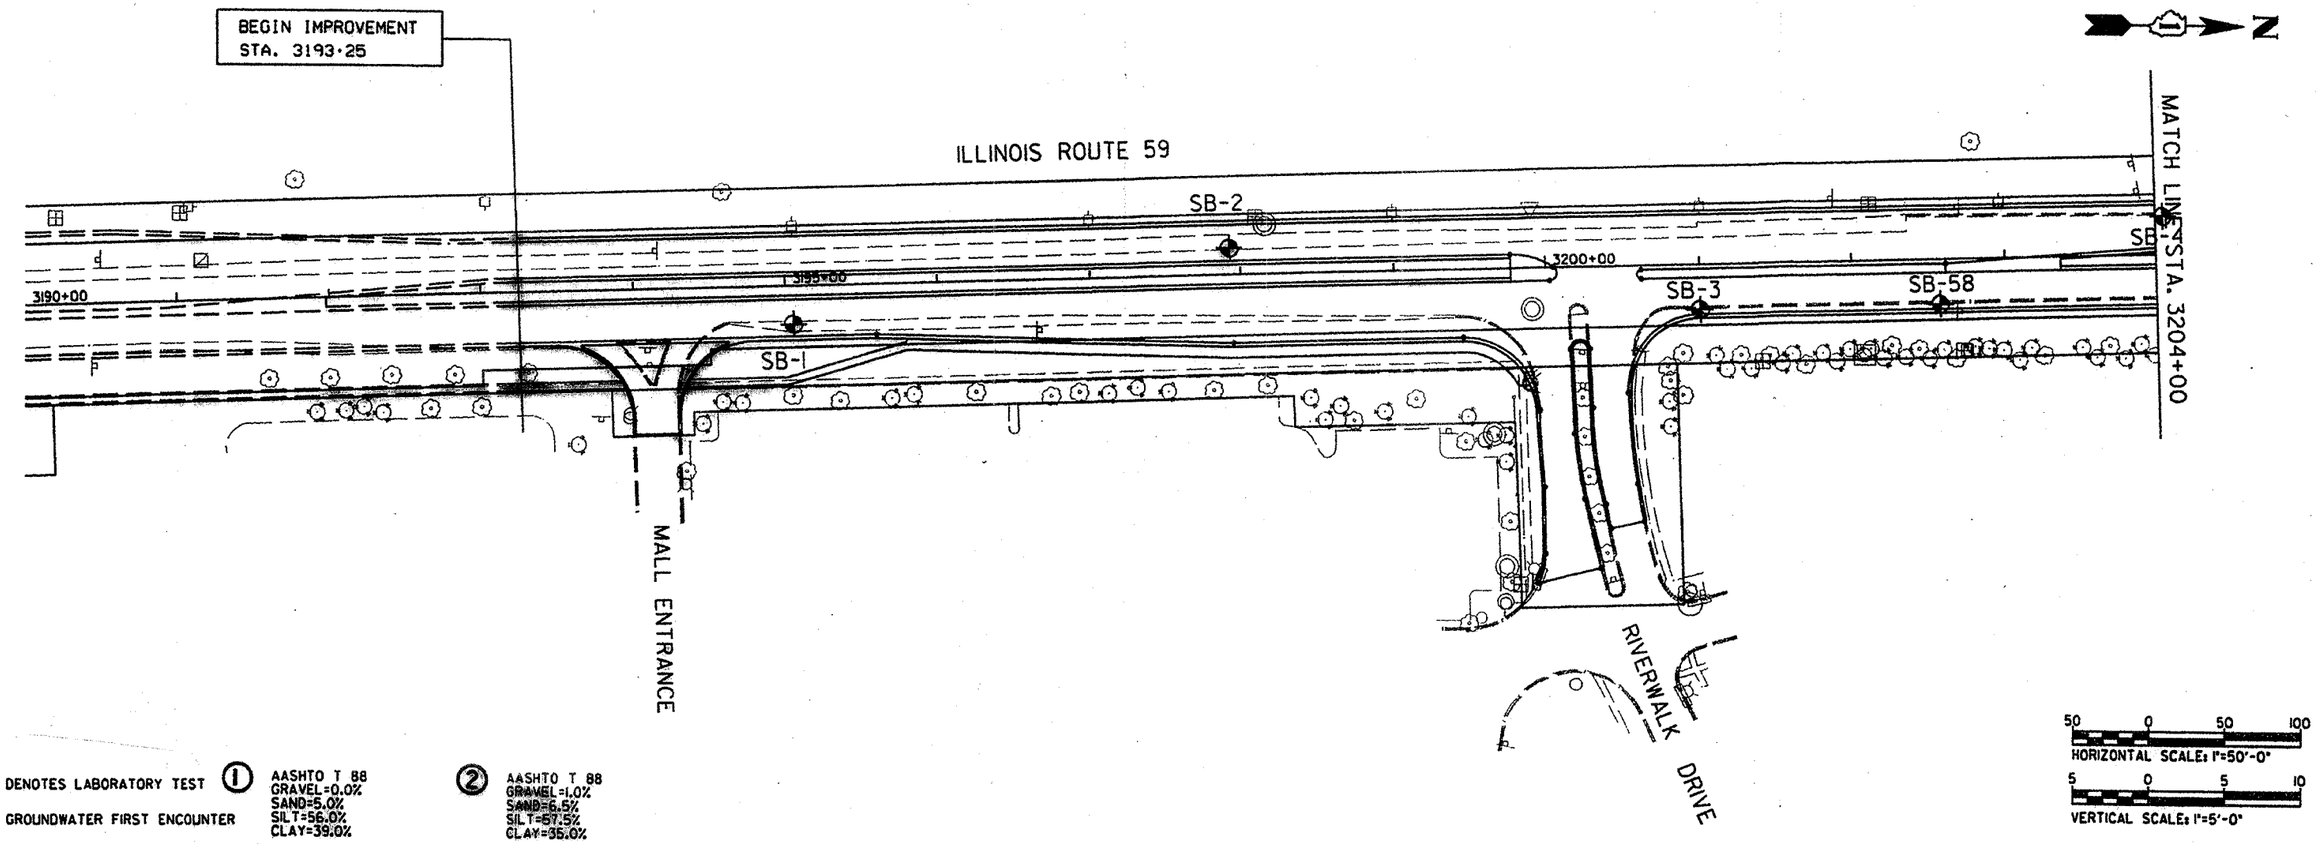


DENOTES LABORATORY TEST

GROUNDWATER FIRST ENCOUNTER

GROUNDWATER UPON COMPLETION

① AASHTO T 88
GRAVEL=0.0%
SAND=5.0%
SILT=56.0%
CLAY=39.0%

AASHTO T 89 & T 90
LIQUID LIMIT=47
PLASTICITY INDEX=26

② AASHTO T 88
GRAVEL=1.0%
SAND=6.5%
SILT=57.5%
CLAY=35.0%
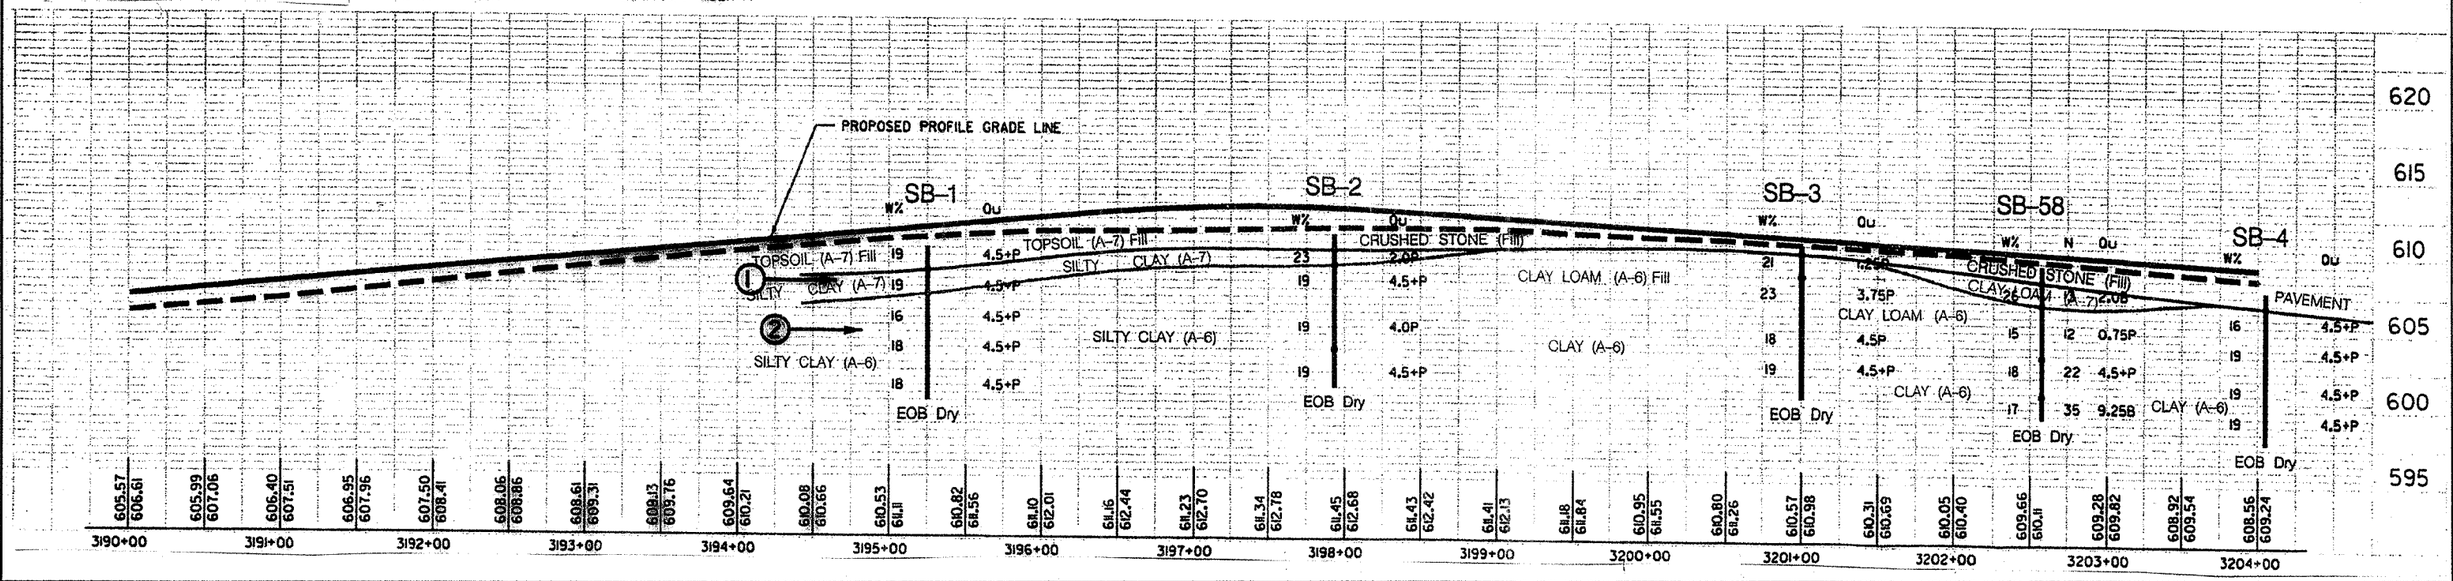
AASHTO T 89 & T 90
LIQUID LIMIT=47
PLASTICITY INDEX=14