F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	*	WILL	64	21
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

* 02-11106-01-BR CONTRACT NO. 83949

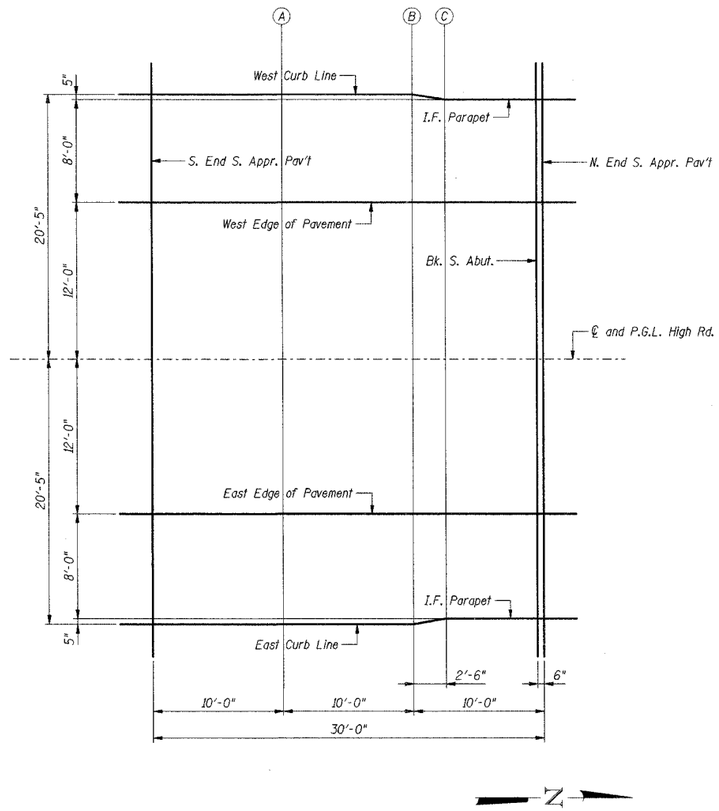

PLAN
SOUTH APPROACH PAVEMENT

WEST CURB LINE

Location	Station	Offset	Theoretical Grade Elevation
S. End S. Appr. Pav't	9+46.33	-20.42	613.21
A	9+56.33	-20.42	612.79
B	9+66.33	-20.42	612.39
C	9+68.83	-20.00	612.30
N. End S. Appr. Pav't	9+76.33	-20.00	612.01

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevation
S. End S. Appr. Pav't	9+46.33	-12.00	613.38
A	9+56.33	-12.00	612.96
B	9+66.33	-12.00	612.55
C	9+68.83	-12.00	612.46
N. End S. Appr. Pav't	9+76.33	-12.00	612.17

℄ AND P.G.L. HIGH RD.

Location	Station	Offset	Theoretical Grade Elevation
S. End S. Appr. Pav't	9+46.33	0.00	613.62
A	9+56.33	0.00	613.20
B	9+66.33	0.00	612.79
C	9+68.83	0.00	612.70
N. End S. Appr. Pav't	9+76.33	0.00	612.41

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevation
S. End S. Appr. Pav't	9+46.33	12.00	613.38
A	9+56.33	12.00	612.96
B	9+66.33	12.00	612.55
C	9+68.83	12.00	612.46
N. End S. Appr. Pav't	9+76.33	12.00	612.17

EAST CURB LINE

Location	Station	Offset	Theoretical Grade Elevation
S. End S. Appr. Pav't	9+46.33	20.42	613.21
A	9+56.33	20.42	612.79
B	9+66.33	20.42	612.39
C	9+68.83	20.00	612.30
N. End S. Appr. Pav't	9+76.33	20.00	612.01

SHT. S-05 OF 28

REVISIONS	
NAME	DATE

LOCKPORT TOWNSHIP HIGHWAY DEPARTMENT
TR216A HIGH ROAD OVER LONG RUN CREEK
SECTION 02-11106-01-BR

TOP OF SOUTH APPROACH PAVEMENT ELEVATIONS

SCALE:
DATE: 9-07-2007
DRAWN BY: CCE
CHECKED BY:

TENG

TENG & ASSOCIATES, INC.
ENGINEERS·ARCHITECTS·PLANNERS
205 N. MICHIGAN AVE. CHICAGO, IL 60601
TELEPHONE: 312/819-4000

ERWINCC

..\ALT00R67.DGN, ..\TTB00R68.DGN
9-07-2007, 11:39:00 S:\DOCUMENT\02229902\STRUCT\DGN\DUKEDORMT.DGN