F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	*	WILL	64	22
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
* 02-11106-01-BR		CONTRACT NO. 83949		

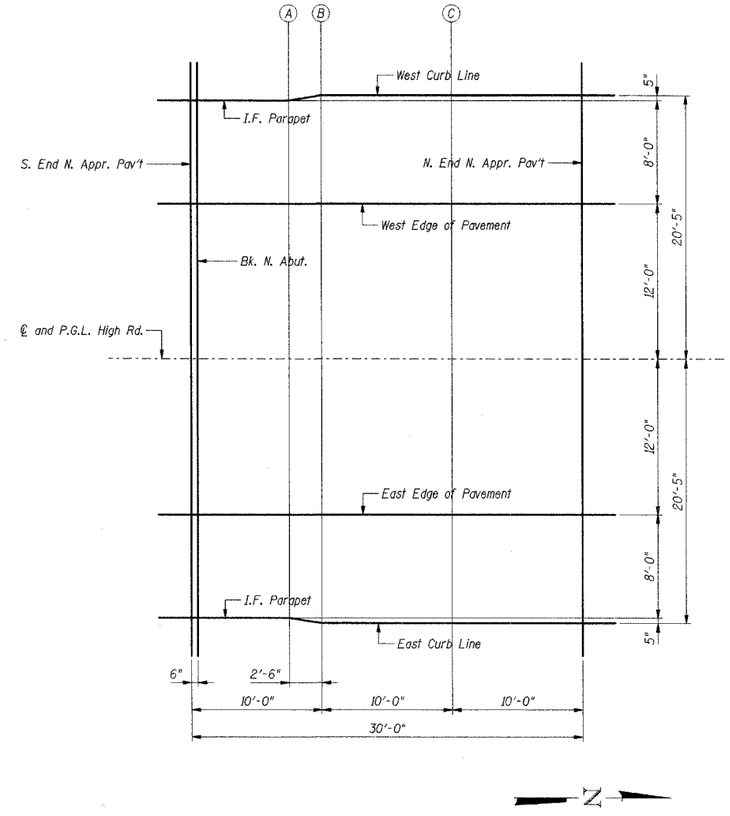

PLAN
NORTH APPROACH PAVEMENT

WEST CURB LINE

Location	Station	Offset	Theoretical Grade Elevation
S. End N. Appr. Pav't	10+38.67	-20.00	609.92
A	10+46.17	-20.00	609.71
B	10+48.67	-20.42	609.63
C	10+58.67	-20.42	609.36
N. End N. Appr. Pav't	10+68.67	-20.42	609.11

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevation
S. End N. Appr. Pav't	10+38.67	-12.00	610.08
A	10+46.17	-12.00	609.87
B	10+48.67	-12.00	609.80
C	10+58.67	-12.00	609.53
N. End N. Appr. Pav't	10+68.67	-12.00	609.28

℄ AND P.G.L. HIGH RD.

Location	Station	Offset	Theoretical Grade Elevation
S. End N. Appr. Pav't	10+38.67	0.00	610.32
A	10+46.17	0.00	610.11
B	10+48.67	0.00	610.04
C	10+58.67	0.00	609.77
N. End N. Appr. Pav't	10+68.67	0.00	609.52

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevation
S. End N. Appr. Pav't	10+38.67	12.00	610.08
A	10+46.17	12.00	609.87
B	10+48.67	12.00	609.80
C	10+58.67	12.00	609.53
N. End N. Appr. Pav't	10+68.67	12.00	609.28

EAST CURB LINE

Location	Station	Offset	Theoretical Grade Elevation
S. End N. Appr. Pav't	10+38.67	-20.00	609.92
A	10+46.17	-20.00	609.71
B	10+48.67	-20.42	609.63
C	10+58.67	-20.42	609.36
N. End N. Appr. Pav't	10+68.67	-20.42	609.11

SHT. S-06 OF 28

REVISIONS	
NAME	DATE

LOCKPORT TOWNSHIP HIGHWAY DEPARTMENT
TR216A HIGH ROAD OVER LONG RUN CREEK
SECTION 02-11106-01-BR

TOP OF NORTH APPROACH PAVEMENT ELEVATIONS

SCALE:
DRAWN BY: CCE
DATE: 9-07-2007
CHECKED BY:

TENG

TENG & ASSOCIATES, INC.
ENGINEERS • ARCHITECTS • PLANNERS
205 N. MICHIGAN AVE. CHICAGO, IL 60601
TELEPHONE 312/616-0800

EPANNCC

..\ALT00R67.DGN, ..\TB00R68.DGN, ..\DEO0RMT.DGN
9-07-2007, 17:39:00 S:\DOCUMENT\02329902\STRUCT\DGN\DEE00RMU.DGN