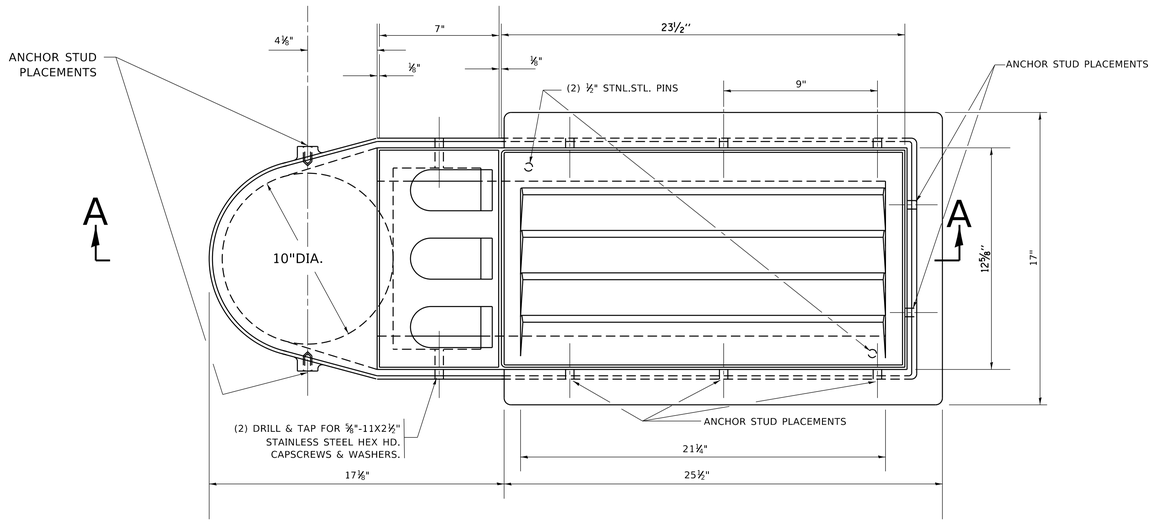

PLAN



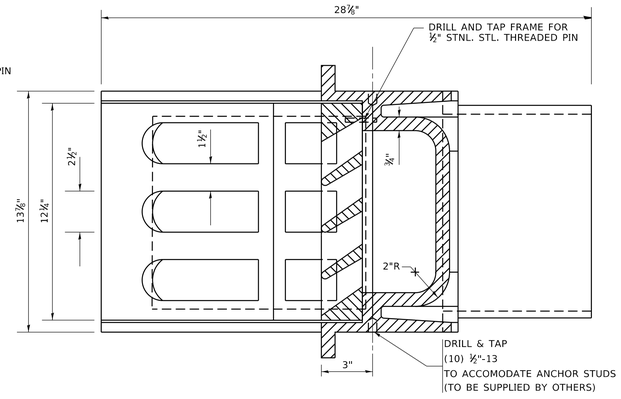

BRIDGE SCUPPER – TYPE "A"

NF - 0332 445
ESTIMATED WEIGHT 512#

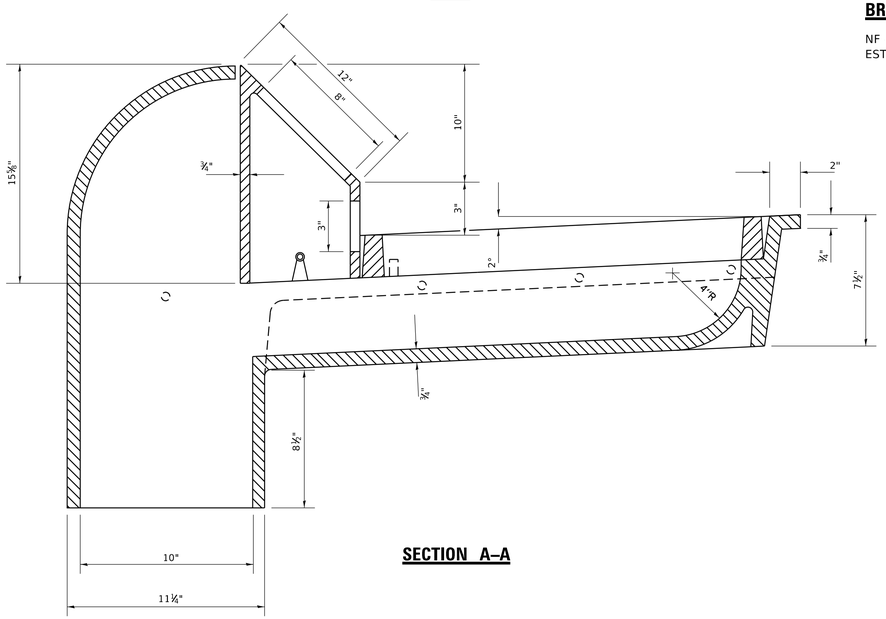

SECTION A–A

SCHEDULE OF QUANTITIES	
STRUCTURE	NO. REQUIRED
TOTAL	

NOTE: A NEOPRENE PAD SHALL BE PROVIDED BETWEEN THE SCUPPER AND THE BEAM. (BY OTHERS)

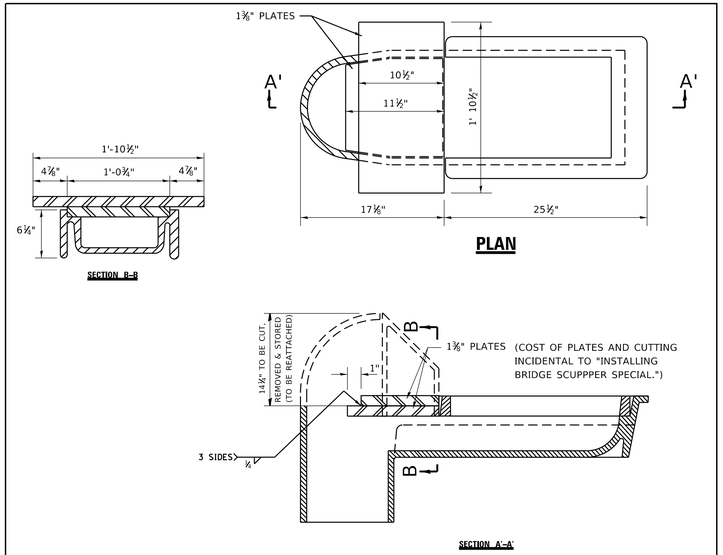

PLAN

BRIDGE SCUPPER – SPECIAL

ONLY FOR MEDIAN PARAPET
DURING STAGED CONSTRUCTION.
(MEDIAN PARAPET IS OMITTED TEMPORARILY.)

MATERIAL: CAST GREY IRON ASTM A-48, CLASS 35B
FINISH: NONE

MODEL: Default
FILE NAME: pw:\\IL084EBIDINTEG.illinois.gov:PWIDOT\Documents\IDOT Offices\District 1\Projects\Std\Std22x34\CADData\CADsheets\cs01.dgn

USER NAME = footemj	DESIGNED -	REVISED - 10-18-02	
	DRAWN -	REVISED -	
PLOT SCALE = 50.0000 ' / in.	CHECKED -	REVISED -	
PLOT DATE = 3/5/2019	DATE -	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

EXPRESSWAY UNIT DETAIL
BRIDGE SCUPPER TYPE "A"

SCALE: NONE | SHEET 1 OF 1 SHEETS | STA. | TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	CS-01		CONTRACT NO.	
		ILLINOIS	FED. AID PROJECT	

cs01.dgn 3/5/2019 2:08:02 PM User=footemj