STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

TOTAL PROJECT ESTIMATE NO.	SECT.	COUNTY	TOTAL SHEETS	SHEET NO.
SBI 75	115BR	WINNEBAGO	8	2
FED. ROAD DIV. NO. 1	ILLINOIS	PROJECT		

P-92-010-70 (201)

INDEX OF SHEETS

1. COVER SHEET & INDEX OF SHEETS
2. SUMMARY OF QUANTITIES, GENERAL NOTES, SCHEDULE OF QUANTITIES & TYPICAL SECTION
3. GENERAL PLAN & ELVATION
4. APPROACH DETAILS
5. SUPER STRUCTURE
6. TYPE W STEEL RAILING
7. WEST ABUTMENT
8. EAST ABUTMENT

STANDARDS

2113-1 NAME PLATE
2115-3 PAVEMENT FABRIC
2230-7 STEEL PLATE BEAM GUARD RAIL
2231-3 APPLICATION OF STEEL PLATE BEAM GUARD RAIL
2239-5 WIDENING & SHOULDERS
2298-3 APPLICATION OF TRAFFIC CONTROL DEVICES
2299-4 DESIGN OF TRAFFIC CONTROL DEVICES
2300 FLAGMAN TRAFFIC CONTROL SIGN
2302-2 APPLICATION OF TRAFFIC CONTROL DEVICES
2303-3 " " " " " " " "
2305-2 " " " " " " " "
2306-3 " " " " " " " "
2307-3 " " " " " " " "
2309-2 " " " " " " " "

PLANS FOR PROPOSED STATE BOND ISSUE HIGHWAY

SCALES

PLAN	1 INCH	100 FT.
PROFILE, HOR.	1 INCH	100 FT.
PROFILE, VERT.	1 INCH	10 FT.
CROSS-SECTIONS	1 INCH	5 FT.

SBI ROUTE 75
SEC. 115 BR
WINNEBAGO COUNTY

C-92-047-71

FOR INFORMATION ONLY

LOCATION OF SECTION INDICATED THUS:—

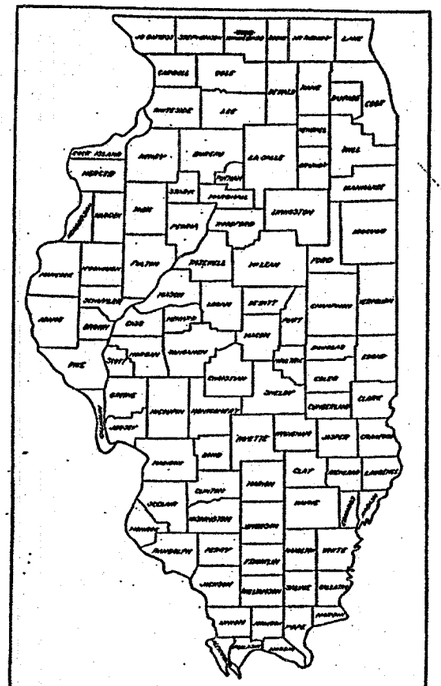

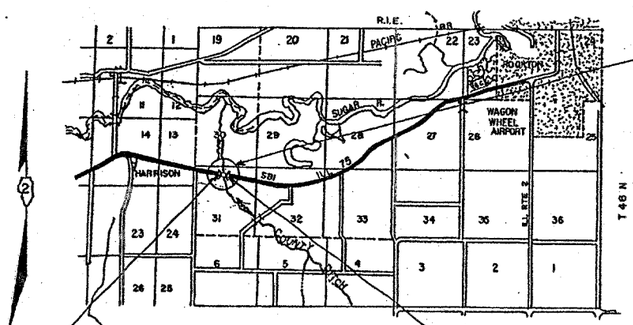

SECTION 115BR
BEGINS STA. 69+76.5

SECTION 115BR
ENDS STA. 72+11.5

SECTION 115BR
INCLUDES Reconstruction of the Superstructure and Portions of the Substructure of the Bridge Carrying SBI Route 75 (ILL.75) Over the County Ditch Flowing North to the Sugar River; Spans 1 @ 38'-4 3/4" at Station 70+94 and all Other Work Necessary to Complete the Section.

GROSS LENGTH OF SECTION = 235.0 Lin.Ft. = 0.045 Miles
NET LENGTH OF SECTION = 235.0 Lin.Ft. = 0.045 Miles

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
SUBMITTED May 31 19 72
D. E. Sumrall
DISTRICT ENGINEER
EXAMINED April 3 19 73
D. Wilson
ENGINEER OF PLANS AND CONTRACTS
PASSED April 3 19 73
M. Baumann
ENGINEER OF DESIGN
APPROVED April 3 19 73
Roger F. Quiggle
ACTING CHIEF TRANSPORTATION ENGINEER