MARLIN & JUDITH SCHUKAR

SE¼, SW¼, SEC 13, T. 5 N., R. 2 E., 3RD P.M.

STA. 450+15
PIPE CULVERTS, CL. A, TY. 1, 30"
LENGTH = 62 FT.
P.R.C.F.E.S. 30" = 2 EACH
U.S.F.L. 544.2 STA. 450+35 35' LT.
D.S.F.L. 543.8 STA. 449+95 35' RT.
TRENCH BACKFILL = 21.0 CU. YDS.
CLASS D PATCHES = 25.6 SQ. YDS.
PIPE CULVERT REMOVAL = 82 FT.

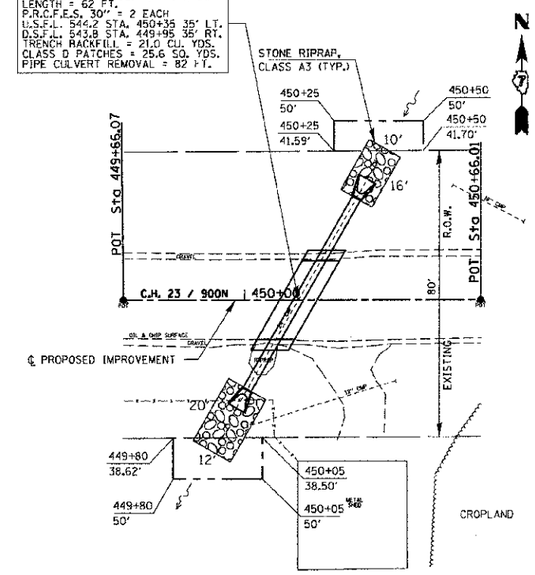

MARLIN & JUDITH SCHUKAR

NE¼, NW¼, SEC 24, T. 5 N., R. 2 E., 3RD P.M.

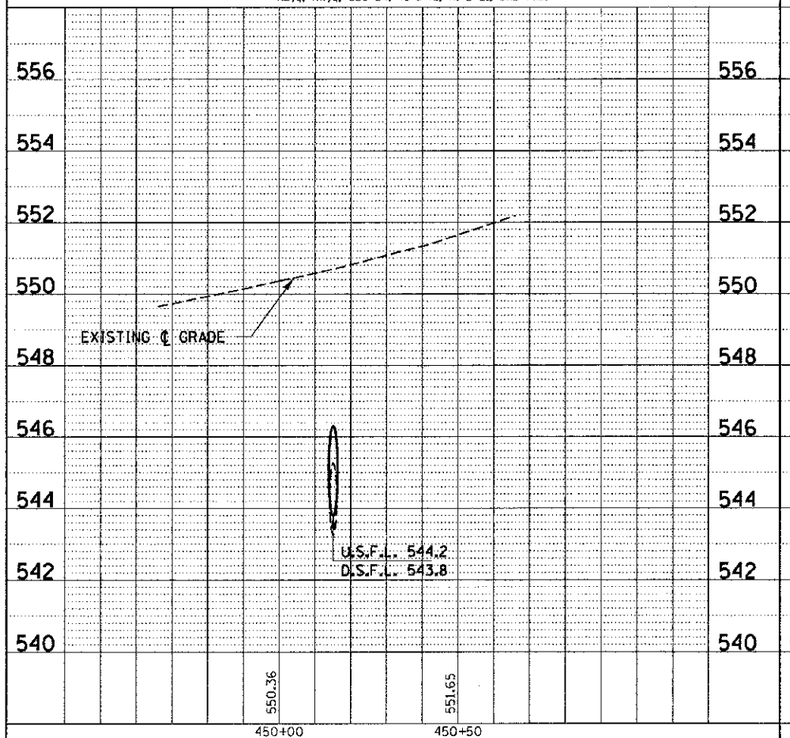

RUFUS MARTIN

SW¼, SE¼, SEC 13, T. 5 N., R. 2 E., 3RD P.M.

STA. 460+15
PIPE CULVERTS, CL. A, TY. 2, 24"
LENGTH = 78 FT.
P.R.C.F.E.S. 24" = 2 EACH
U.S.F.L. 565.6 STA. 460+26 41' LT.
D.S.F.L. 564.0 STA. 460+03 45' RT.
TRENCH BACKFILL = 29.6 CU. YDS.
CLASS D PATCHES = 20.2 SQ. YDS.
PIPE CULVERT REMOVAL = 82 FT.

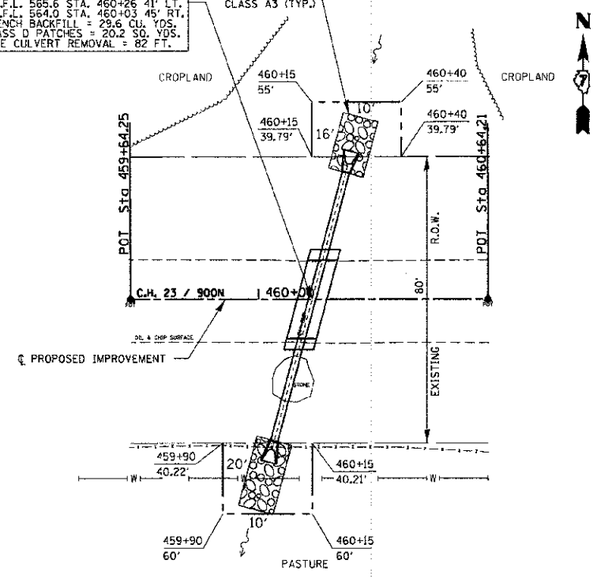

CLIFFORD MASKE

NE¼, NE¼, SEC 24, T. 5 N., R. 2 E., 3RD P.M.

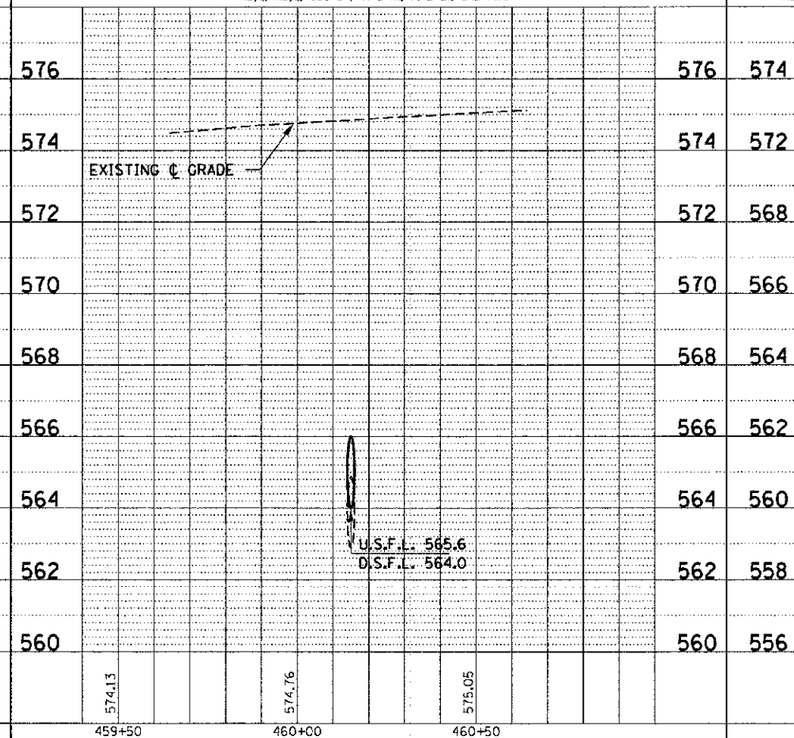

ALBERT MASKE

SE¼, SE¼, SEC 13, T. 5 N., R. 2 E., 3RD P.M.

STA. 466+86
PIPE CULVERTS, CL. A, TY. 2, 42"
LENGTH = 98 FT.
P.R.C.F.E.S. 42" = 2 EACH
U.S.F.L. 562.2 STA. 467+04 50' LT.
D.S.F.L. 557.0 STA. 466+67 58' RT.
TRENCH BACKFILL = 67.1 CU. YDS.
CLASS D PATCHES = 26.7 SQ. YDS.
PIPE CULVERT REMOVAL = 104 FT.

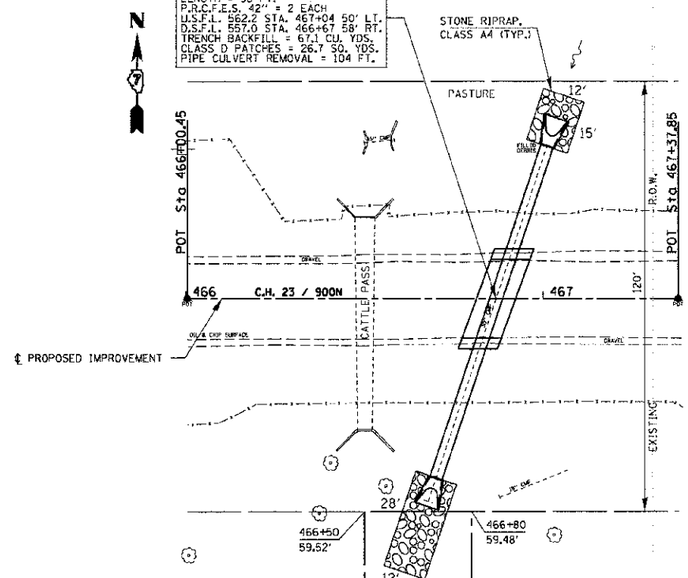

MICHAEL MASKE

NE¼, NE¼, SEC 24, T. 5 N., R. 2 E., 3RD P.M.

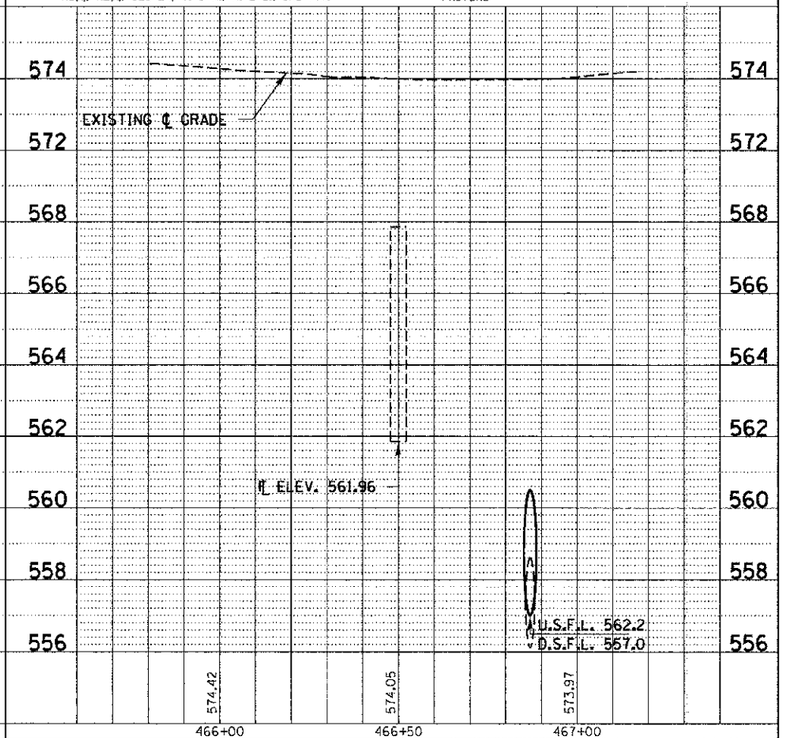

FILE NAME = 110264-sht-pp09.dgn	USER NAME =	DESIGNED - J.W.F.	REVISED -
HAMPTON, LENZINI AND RENWICK, INC. 3301 STEVENSON DRIVE, SUITE 201 SPRINGFIELD, ILLINOIS 62703 ILLINOIS PROFESSIONAL DESIGN FIRM 184.001950		DRAWN - D.T.M.	REVISED -
	PLOT SCALE =	CHECKED - M.G.B.	REVISED -
	PLOT DATE = 1/28/2013	DATE - 01/28/13	REVISED -

STATE OF ILLINOIS
FAYETTE COUNTY HIGHWAY DEPARTMENT

PLAN & PROFILE
F.A.S. 717 / C.H. 23 / 900N

SCALE: H20:V5 | SHEET NO. 9 OF 14 SHEETS | STA. | TO STA.

C.H.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
23	09-00120-00-DR	FAYETTE	76	17
		CONTRACT NO. 95702		
	ILLINOIS FED. AID PROJECT			

PLAN — BY | DATE | SURVEYED | DRAWN | ALIGNMENT CHECKED | GRADES CHECKED | NOTE BOOK | NO. | STRUCTURE NO./TYPE CHKD

PROFILE — BY | DATE | SURVEYED | DRAWN | ALIGNMENT CHECKED | GRADES CHECKED | NOTE BOOK | NO. | STRUCTURE NO./TYPE CHKD