


PLAN SN 041-0013 (SB)

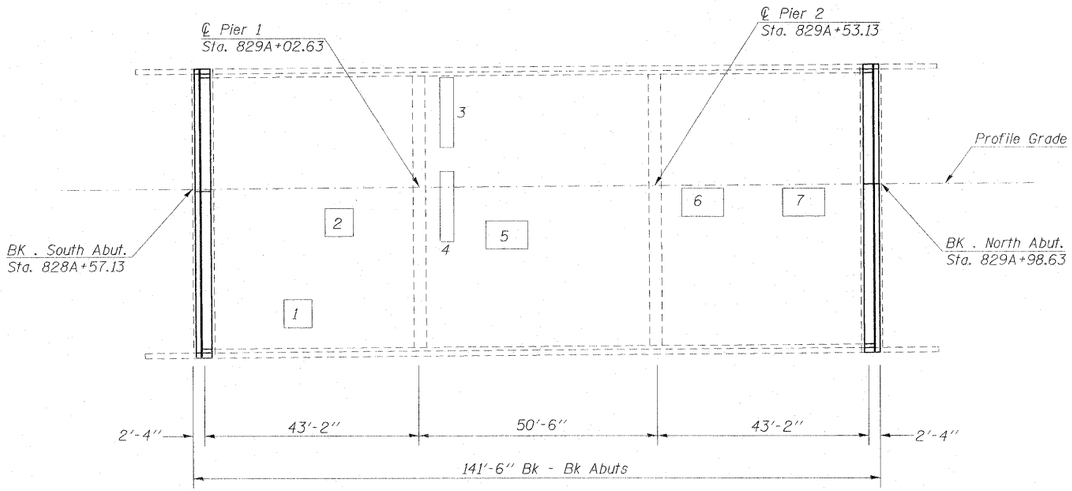


PLAN SN 041-0012 (NB)

| NUMBER | LENGTH (FT) | WIDTH (FT) | AREA (SQ YD) |
|---|---|---|---|
| 1 | 2 | 2 | 0.5 |
| 2 | 2 | 2 | 0.5 |
| 3 | 1 | 5 | 0.6 |
| 4 | 1 | 5 | 0.6 |
| 5 | 3 | 2 | 0.7 |
| 6 | 3 | 2 | 0.7 |
| 7 | 3 | 2 | 0.7 |
| 8 | 2 | 4 | 0.9 |
| 9 | 6 | 4 | 2.7 |
| 10 | 1 | 6 | 0.7 |
| 11 | 10 | 2 | 2.2 |
| 12 | 3 | 1 | 0.3 |
| 13 | 7 | 3 | 2.3 |

Notes: Deck Survey was performed in June 2010

The Resident Engineer will determine final patch locations and quantities in the field before bridge deck patching operations begin.

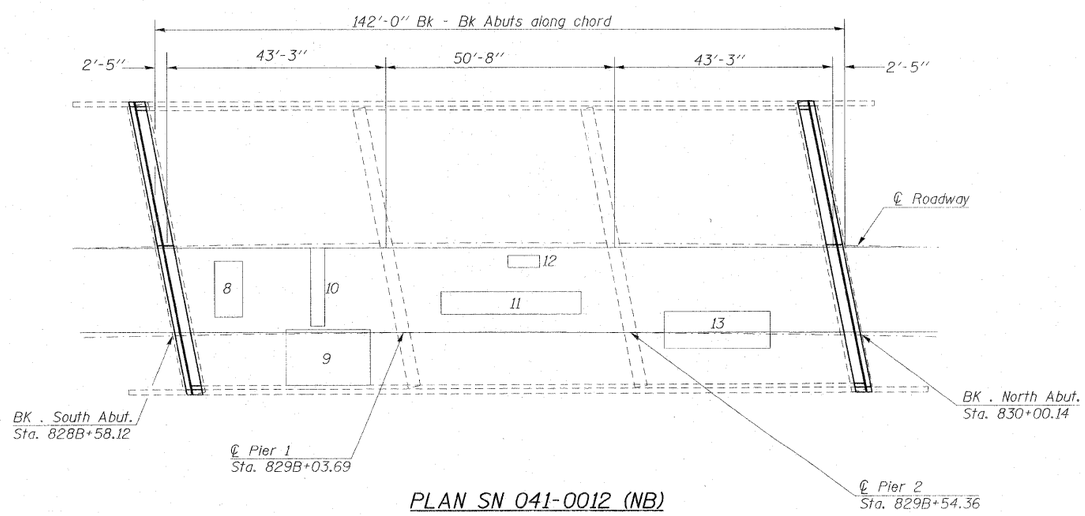Areas of deck repairs shown are estimated. The Engineer shall show actual locations of deck repairs on As-built Plans.

## BILL OF MATERIAL

| Item | Unit | Total |
|---|---|---|
| Deck Slab Repair (Full Depth) | Sq Yd | 13.4 |

## DECK SLAB REPAIRS
## JEFFERSON COUNTY
## STRUCTURE NO. 041-0012 (N.B.)
## STRUCTURE NO. 041-0013 (S.B.)

| | | | |
|---|---|---|---|
| FILE NAME = c:\pw_work\pwidot\coleman\d0211660\041-0012_2013sht-plan.dgn | USER NAME = coleman | DESIGNED - TWH | REVISED - |
| | | DRAWN - TWH | REVISED - |
| | PLOT SCALE = 16.0000 ' / IN. | CHECKED - MAS | REVISED - |
| | PLOT DATE = 2/3/2011 | DATE - 8/10/10 | REVISED - |

**STATE OF ILLINOIS**
**DEPARTMENT OF TRANSPORTATION**

**DECK SLAB REPAIRS**

SCALE: | SHEET NO. 2 OF 11 SHEETS | STA. | TO STA.

| F.A.I RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 57 | (41-2-1,41-3,41-3-1)R-1 | JEFFERSON | 422 | 145 |
| | | CONTRACT NO. 78172 | | |
| | | ILLINOIS FED. AID PROJECT | | |