CONTRACT NO. 62343

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
348	*	COOK	86	10
STA.		TO STA.		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		

* (1214&3127-1)RS-1

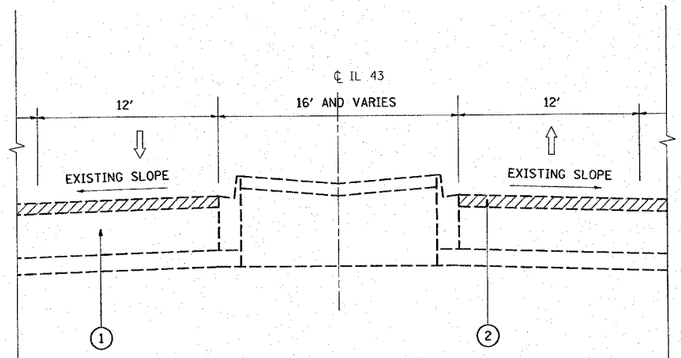

EXISTING TYPICAL SECTION
STA. 26+00 TO STA. 34+92.22

LEGEND

1. EXISTING CONCRETE PAVEMENT, 10"
2. PROPOSED HMA SURFACE REMOVAL, 2 1/2"
3. PROPOSED POLYMERIZED LEVELING BINDER, (MACHINE METHOD), IL-4.75, N50, 3/4"
4. PROPOSED POLYMERIZED HMA SURFACE COURSE, MIX. F, N90, 1 3/4"

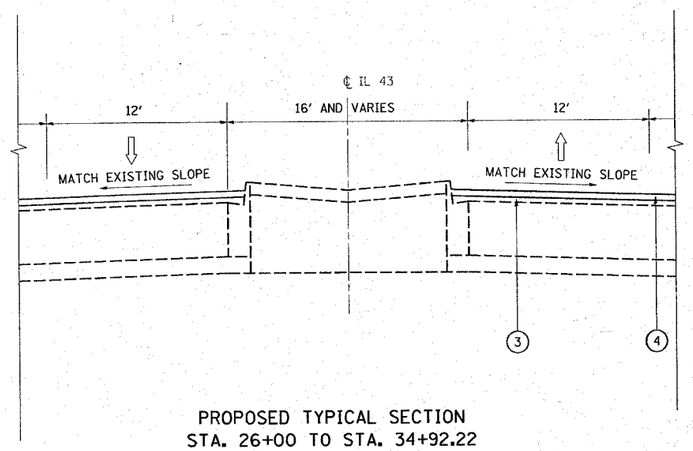

PROPOSED TYPICAL SECTION
STA. 26+00 TO STA. 34+92.22

(NOT TO SCALE)

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

IL. RT. 43 (HARLEM AVE.)
EXISTING & PROPOSED
TYPICAL SECTIONS

SCALE: VERT. HORIZ. NONE
DATE
DRAWN BY
CHECKED BY

PLOT DATE = 12/13/2007
FILE NAME = c:\projects\d149201\sh_rdwy.dgn
PLOT SCALE = 50.0000 ' / IN.
USER NAME = drivekosgn