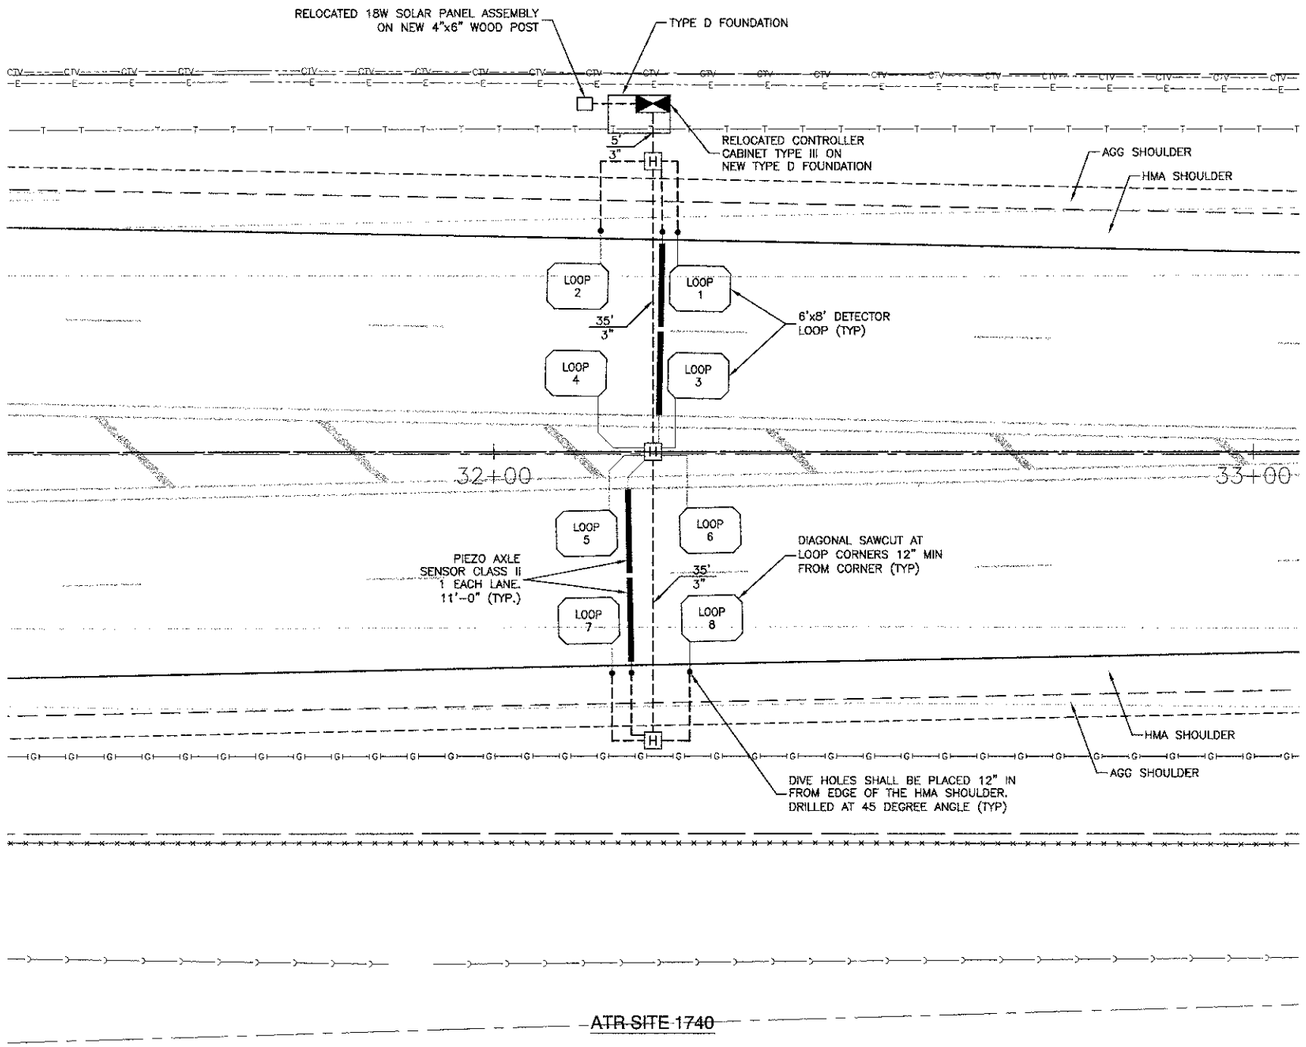

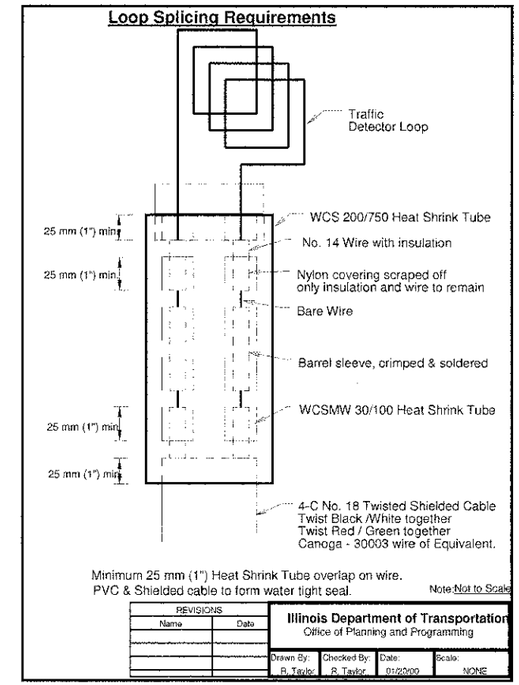

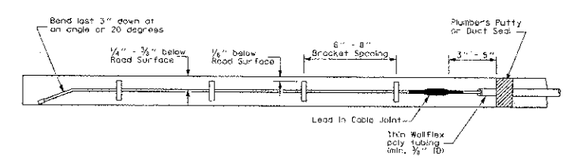

PIEZO DETAIL

NOTES:

1. ALL UNDERGROUND CONDUIT SHALL BE 1½" UNLESS OTHERWISE SHOWN.
2. THE CONTRACTOR SHALL CONTACT MR. RAMON TAYLOR OF THE IDOT OP&P DATA MANAGEMENT LAB AT (217)782-2065 A MINIMUM OF 72 HOURS PRIOR TO INSTALLING THE PIEZO AXLE SENSORS. A REPRESENTATIVE OF THE OP&P MANAGEMENT LAB MUST BE PRESENT DURING INSTALLATION OF THE PIEZO AXLE SENSORS.

SCHEDULE OF QUANTITIES

ITEM	UNIT	QUAN
UNDERGROUND CONDUIT, COILABLE NONMETALLIC CONDUIT, 1 1/2" DIA.	FOOT	87
UNDERGROUND CONDUIT, COILABLE NONMETALLIC CONDUIT, 3" DIA.	FOOT	85
HEAVY-DUTY HANDHOLE	EACH	3
CONCRETE FOUNDATION, TYPE D	FOOT	4
DETECTOR LOOP, SPECIAL	FOOT	440
PIEZO AXLE SENSOR, CLASS II	FOOT	44
SOLAR POWER ASSEMBLY	EACH	1
CONTROLLER CABINET TYPE III, SPECIAL	EACH	1
ELECTRIC CABLE IN CONDUIT, CONOGA-30003	FOOT	403