EF004

APRON QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	QUANTITY	AS BUILT QUANTITY
AR402622	POROUS FRICTION COURSE, 0.10'	S.Y.	2,498	
AR603510	BITUMINOUS TACK COAT	GAL.	625	

CROSS-OVER TAXIWAY QUANTITIES				
ITEM NO.	DESCRIPTION	UNIT	QUANTITY	AS BUILT QUANTITY
AR402622	POROUS FRICTION COURSE, 0.10'	S.Y.	607	
AR603510	BITUMINOUS TACK COAT	GAL.	152	

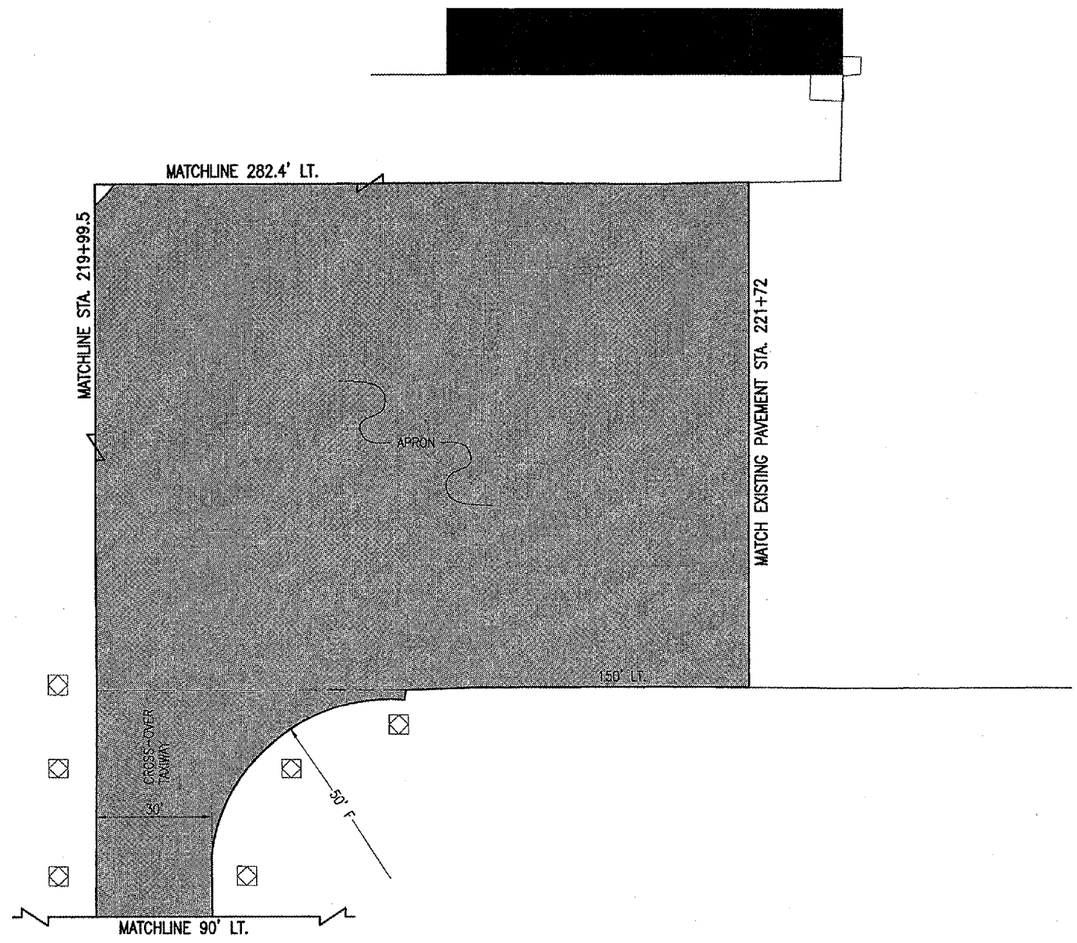

LEGEND

- EXISTING PAVEMENT
- EXISTING BUILDING
- PROPOSED POROUS FRICTION COURSE OVERLAY
- EXISTING TAXIWAY REFLECTOR

N

0' 10' 20' 40'
FULL SIZE SCALE: 1"= 20'
HALF SIZE SCALE: 1"= 40'

DATE	REVISION	BY

EFFINGHAM COUNTY
MEMORIAL AIRPORT
EFFINGHAM, ILLINOIS

IL. PROJ.: 1H2-3688 A.I.P. PROJ.: 3-17-0040-810

HEI Project No.: 80407RWY0 0800
Filename: R-121CON.DWG
Scale: 1"= 20'
Date: 02/15/07

LAYOUT	CCC	02/15/07
DRAWN	KDM	02/15/07
REVIEWED	CAH	04/23/07

HANSON

Hanson Professional Services Inc.
1525 South Sixth Street
Springfield, Illinois 62703-2886
Offices Nationwide

RECONSTRUCT RUNWAY 1-19

PROPOSED CONSTRUCTION PLAN FOR APRON

APR 27, 2007 8:22 AM BAK
I:\AIRPORTS\EFFINGHAM\804-07RWY\AIRPORT\SHEETS\R-121CON.DWG - APRON