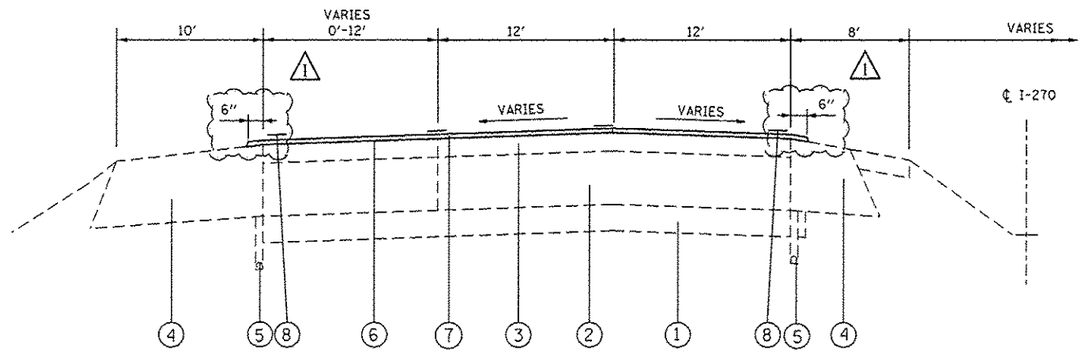

WESTBOUND
STA. 403+11 TO STA. 412+30
STA. 587+00 TO STA. 590+00
STA. 839+47 TO STA. 848+05
STA. 852+43 TO STA. 856+00

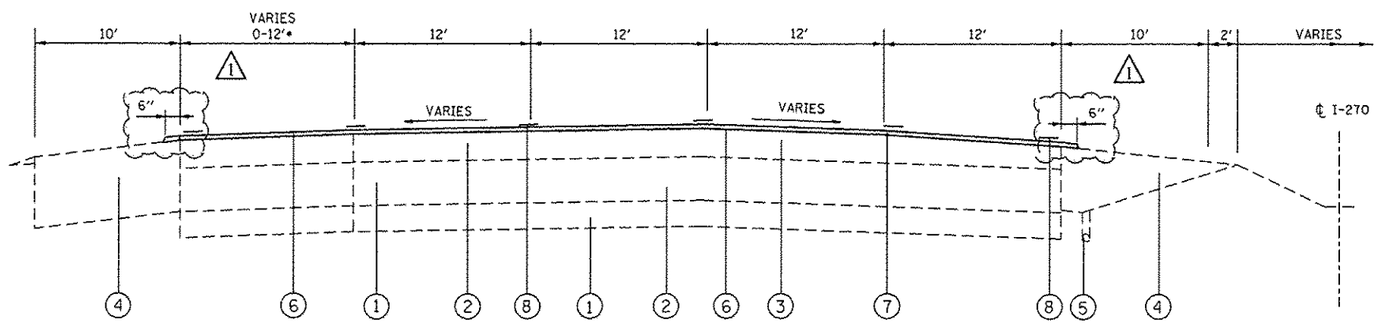

WESTBOUND
STA. 424+10 TO STA. 430+10
STA. 544+75 TO STA. 559+16
•STA. 430+10 TO STA. 438+89 - 5-12' LANES

LEGEND

1. EXISTING SUB-BASE GRANULAR MATERIAL
2. EXISTING PCC PAVEMENT, 10"
3. EXISTING HOT-MIX ASPHALT OVERLAY
4. EXISTING HOT-MIX ASPHALT SHOULDER
5. EXISTING UNDERDRAIN
6. PROPOSED BITUMINOUS MATERIALS (TACK COAT)
7. PROPOSED MICRO-SURFACING, 2-PASSES, MIX "E"
8. PROPOSED MODIFIED URETHANE PAVEMENT MARKING

1 REVISED 6-6-17

FILE NAME = pw:\\IL084EBIDINTEG.illinois.gov:PWIDOT\Documents\IDOT Offices\District 8\Projects\D876K23\DRAWING\Data\CADsheets\D876K23-sht-typical.dgn	USER NAME = challandeske	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTIONS	F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
			REVISED -			270	60-(4,5)-1R5-5	MADISON	18	7
	PLOT SCALE = 100.0000 ' / in.	CHECKED -	REVISED -					CONTRACT NO. 76K23		
Default	PLOT DATE = 6/5/2017	DATE -	REVISED -		SCALE: N/A SHEET OF SHEETS STA. TO STA.		ILLINOIS FED. AID PROJECT			