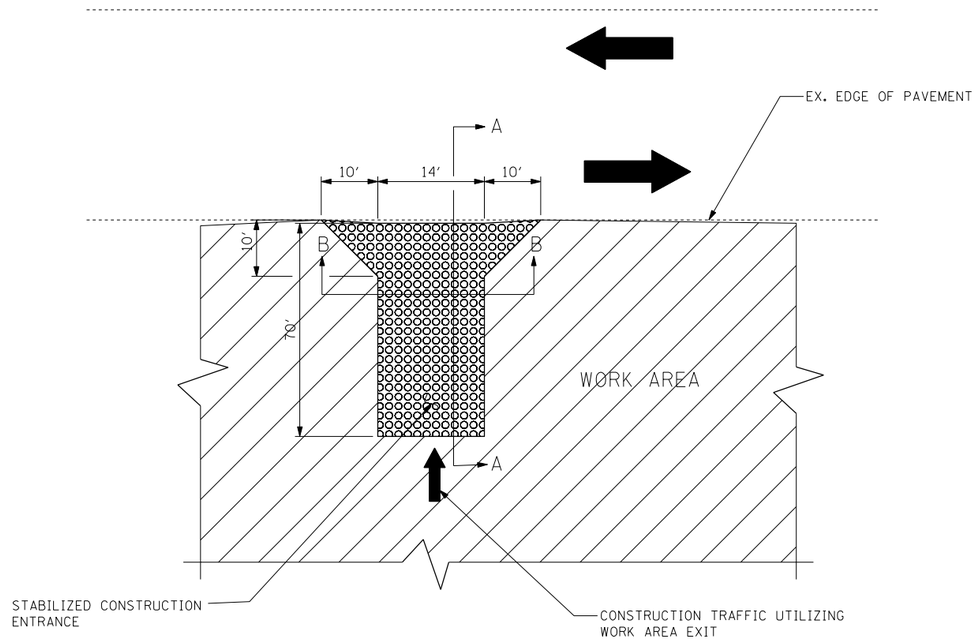

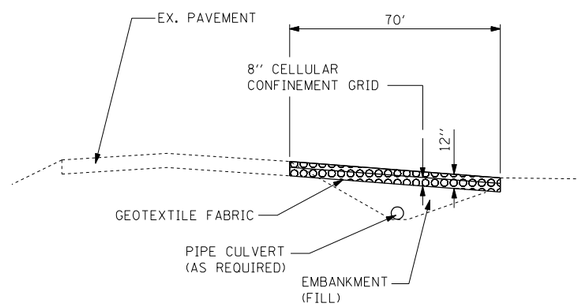

SECTION A-A

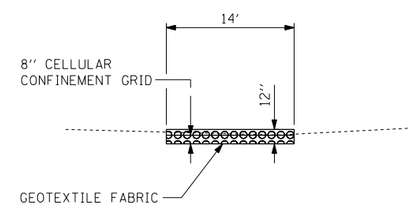

SECTION B-B

STABILIZED CONSTRUCTION ENTRANCE

NOTES:

1. STABILIZED CONSTRUCTION ENTRANCES SHALL CONSIST OF CONSTRUCTING, MAINTAINING, REMOVING AND DISPOSING OF ALL ITEMS RELATED TO THE CONSTRUCTION OF THE ENTRANCES INCLUDING, BUT NOT LIMITED TO, COARSE AGGREGATE, CELLULAR CONFINEMENT GRID, GEOTEXTILE FABRIC, COARSE AGGREGATE USED FOR TRANSITION FROM THE CONSTRUCTION ROAD TO THE STABILIZED CONSTRUCTION ENTRANCE, ADDITIONAL EMBANKMENT (FILL) TO TIE INTO EXISTING GROUND, AND PIPE CULVERTS AND EARTHWORK NECESSARY TO MAINTAIN EXISTING DITCH DRAINAGE. THIS WORK WILL NOT BE PAID FOR SEPARATELY, BUT SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR EARTH EXCAVATION.
2. STABILIZED CONSTRUCTION ENTRANCE DIMENSIONS SHALL BE APPROVED BY THE ENGINEER.