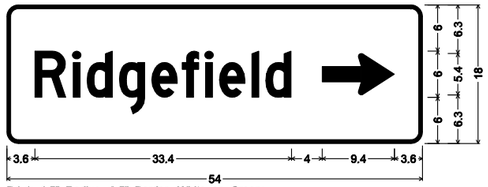

D1-1; 1.5" Radius, 0.5" Border, White on Green;
[Ridgefield] D 55% spacing; Standard Arrow Custom 9.4" X 5.4" 0°;

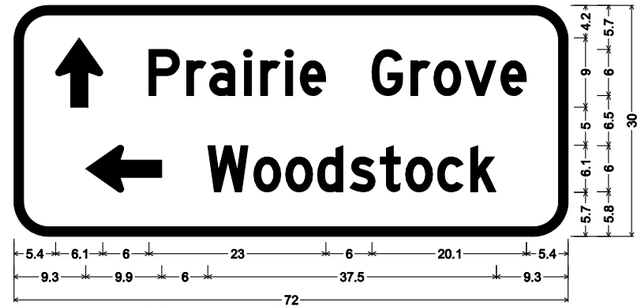

D1-3; 4.5" Radius, 1.3" Border, White on Green;
Standard Arrow Custom 9.0" X 6.1" 90°; [Prairie Grove] D 60% spacing;
Standard Arrow Custom 9.9" X 6.1" 180°; [Woodstock] D 60% spacing;

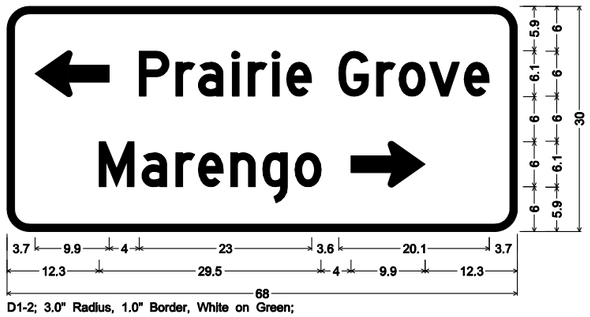

D1-2; 3.0" Radius, 1.0" Border, White on Green;
Standard Arrow Custom 9.9" X 6.1" 180°; [Prairie Grove] D 60% spacing;
[Marengo] D 60% spacing; Standard Arrow Custom 9.9" X 6.1" 0°;

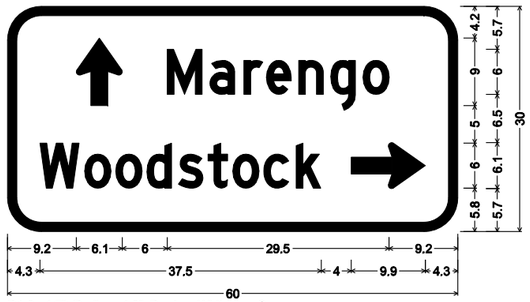

D1-3; 4.5" Radius, 1.3" Border, White on Green;
Standard Arrow Custom 9.0" X 6.1" 90°; [Marengo] D 60% spacing;
[Woodstock] D 60% spacing; Standard Arrow Custom 9.9" X 6.1" 0°;

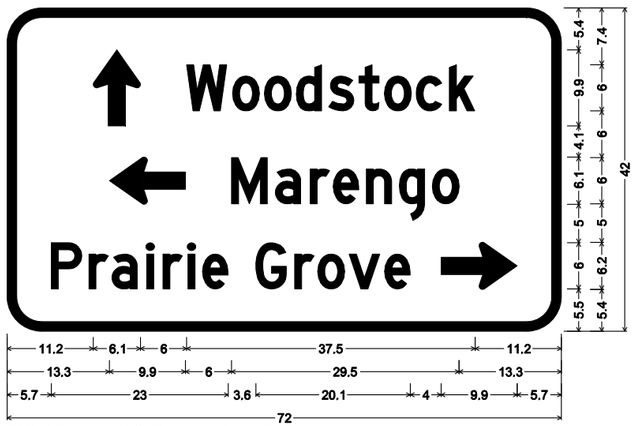

D1-3; 4.5" Radius, 1.3" Border, White on Green;
Standard Arrow Custom 9.9" X 6.1" 90°; [Woodstock] D 60% spacing;
Standard Arrow Custom 9.9" X 6.1" 180°; [Marengo] D 60% spacing;
[Prairie Grove] D 60% spacing; Standard Arrow Custom 9.9" X 6.1" 0°;



D3-1; 1.5" Radius, 0.5" Border, White on Green;
[COLLEGE ENT 1] D 45% spacing; Standard Arrow Custom 9.9" X 6.1" 0°;

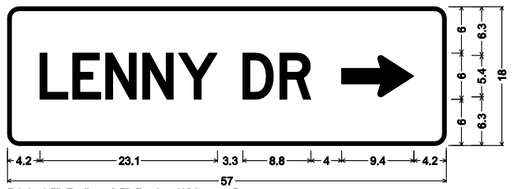

D1-1; 1.5" Radius, 0.5" Border, White on Green;
[LENNY DR] D 55% spacing; Standard Arrow Custom 9.4" X 5.4" 0°;

FILE NAME = S:\1606\CADD Sheets\D162517-sht-signing.dgn	USER NAME = _USERNAME_	DESIGNED - JPW	REVISED -
		DRAWN - JPW	REVISED -
	PLOT SCALE = 100.0000 ' / IN.	CHECKED - MGZ	REVISED -
	PLOT DATE = 10/10/2013	DATE - 10/15/2013	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGN DETAILS

SCALE: NONE | SHEET NO. 236 OF 431 SHEETS | STA. | TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
305	27R-3	MCHENRY	431	236
		CONTRACT NO. 62517		
	ILLINOIS FED. AID PROJECT			