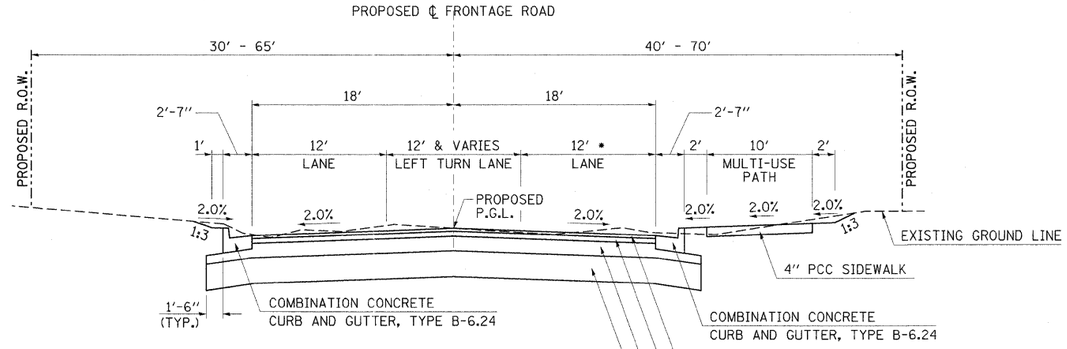

* RIGHT LANE TAPERS FROM 12′ WIDE AT STA. 496+89.77 TO 18.88′ AT STA. 499+34.48

**CONSTRUCT LIME MODIFIED SOIL MIXTURE FROM STA. 462+10.86 TO STA. 468+50.00 AND STA. 478+00.00 TO STA. 490+00.00.

TYPICAL SECTION #1

FRONTAGE ROAD

STA. 462+20.86 TO STA. 466+57.83
STA. 476+65.00 TO STA. 480+46.78
STA. 494+38.35 TO STA. 499+45.18

NOTES:

1. CENTER LANE VARIES FROM 12′ TO 0′ AND OUTSIDE LANES VARY FROM 12′ TO 13′ FROM STA. 464+32.83 TO STA. 466+57.83.
2. CENTER LANE VARIES FROM 12′ TO 0′ AND OUTSIDE LANES VARY FROM 12′ TO 13′ FROM STA. 478+21.78 TO STA. 480+46.78.
3. CENTER LANE VARIES FROM 0′ TO 12′ AND OUTSIDE LANES VARY FROM 13′ TO 12′ FROM STA. 494+38.35 TO STA. 496+63.35.

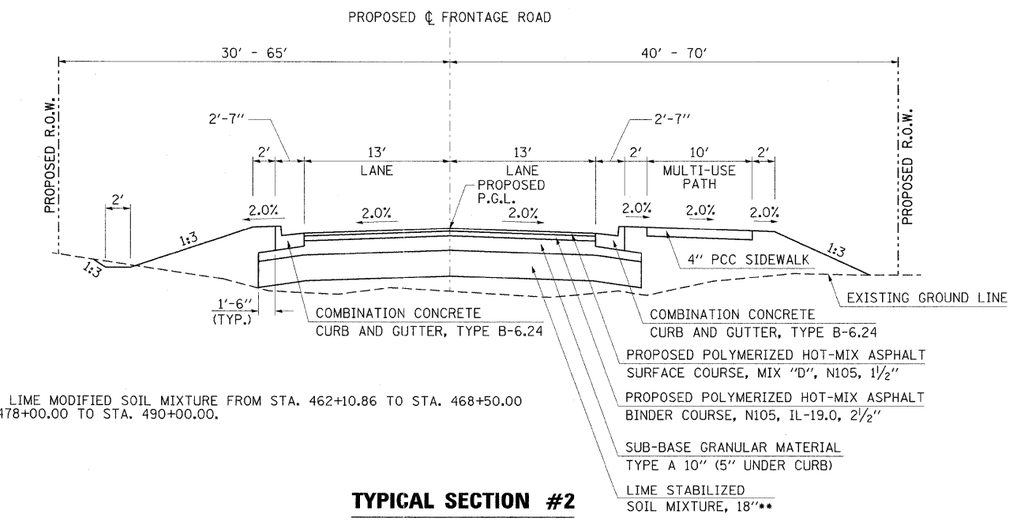

**CONSTRUCT LIME MODIFIED SOIL MIXTURE FROM STA. 462+10.86 TO STA. 468+50.00 AND STA. 478+00.00 TO STA. 490+00.00.

TYPICAL SECTION #2

FRONTAGE ROAD

STA. 466+57.83 TO STA. 471+74.29
STA. 480+46.78 TO STA. 494+38.35

FILE NAME =	USER NAME = Gary Davis	DESIGNED - JRK	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TYPICAL SECTIONS FRONTAGE ROAD	F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
I:\IDOT\0906603\Draw\CADD_Sheets\Frontage Road Contract\D998859-sht-typical.dgn		DRAWN - SH	REVISED -			331	(1X-1) R-7	WILLIAMSON	79	7
	PLOT SCALE = 50.0000 ′/ IN.	CHECKED - KPF & SPH	REVISED -					CONTRACT NO. 78251		
	PLOT DATE = 3/16/2011	DATE - 3/16/11	REVISED -		SCALE: N/A SHEET NO. OF SHEETS STA. N/A TO STA. N/A		ILLINOIS FED. AID PROJECT			