


NOTES:
1. SEE SCHEDULE OF QUANTITIES FOR STRIPING QUANTITIES.
2. THE COST OF CONCRETE MEDIAN, TYPE SM-4.06 (DOWELLED) SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE FOR CONCRETE MEDIAN, TYPE SM (DOWELLED)
3. DOWEL BARS SHALL BE INSTALLED IN HOLES OF EQUAL DIAMETER WITHOUT MORTAR AS DIRECTED BY THE ENGINEER.
4. VOID LEFT AFTER ISLAND REMOVAL SHALL BE FILLED WITH HOT-MIX ASPHALT BINDER COURSE, IL 19.0, FG, N105

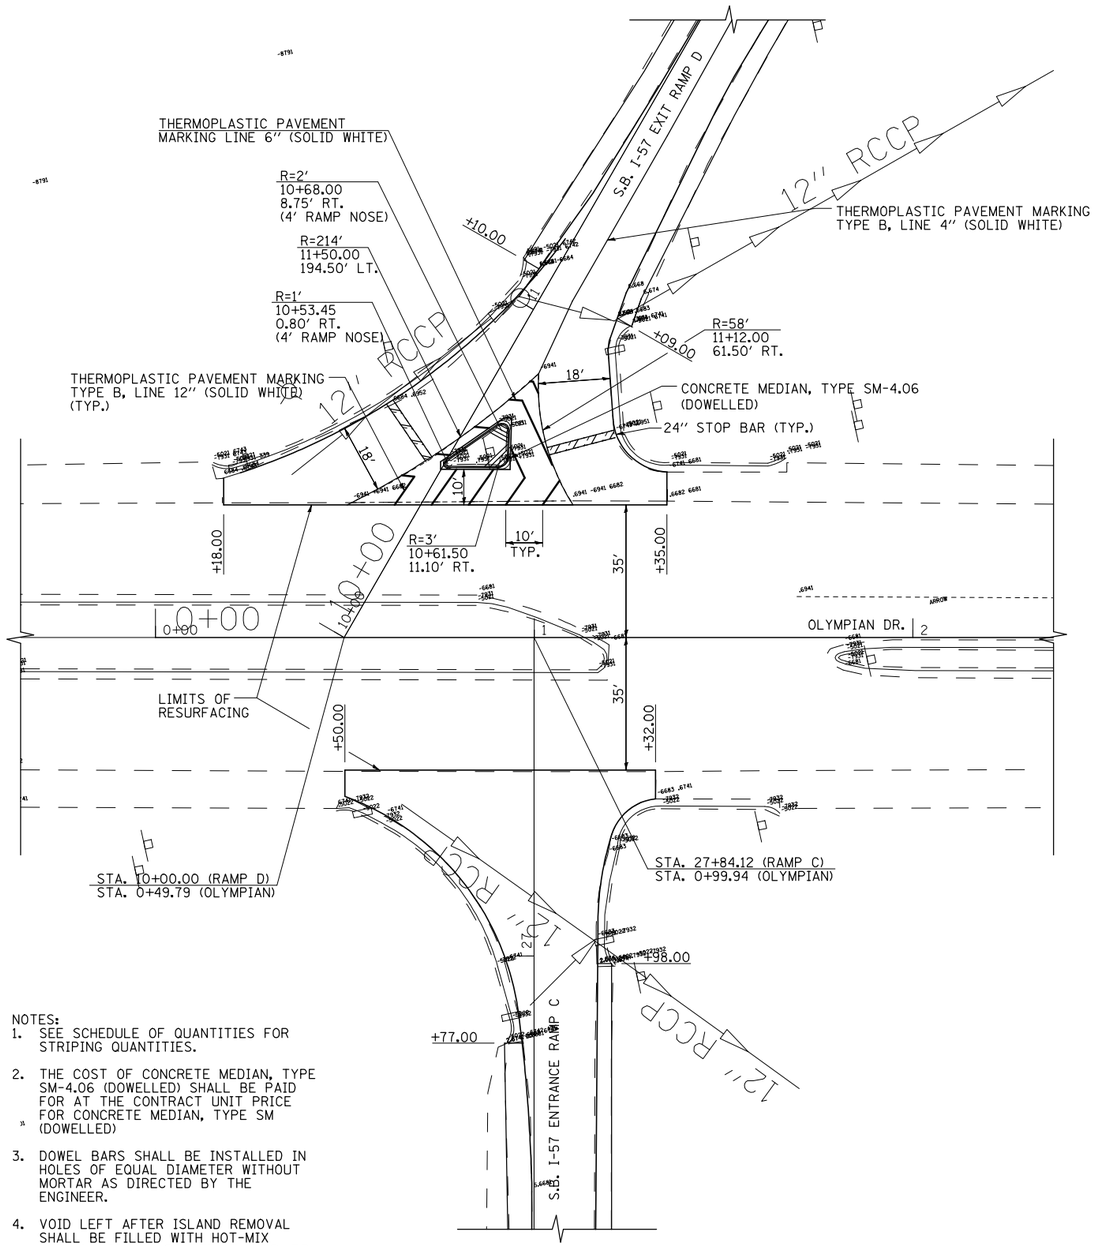


NOTE:
STOP BARS TO BE PLACED AT EXISTING LOCATIONS.

44002805 ISLAND REMOVAL

| LOCATION | SQ. FT. |
|---|---|
| RAMP D | 155.6 |
| RAMP B | 432.7 |
| | 588.3 |

#5000200 HOT-MIX ASPHALT BINDER COURSE, IL-19.0, FG, N105
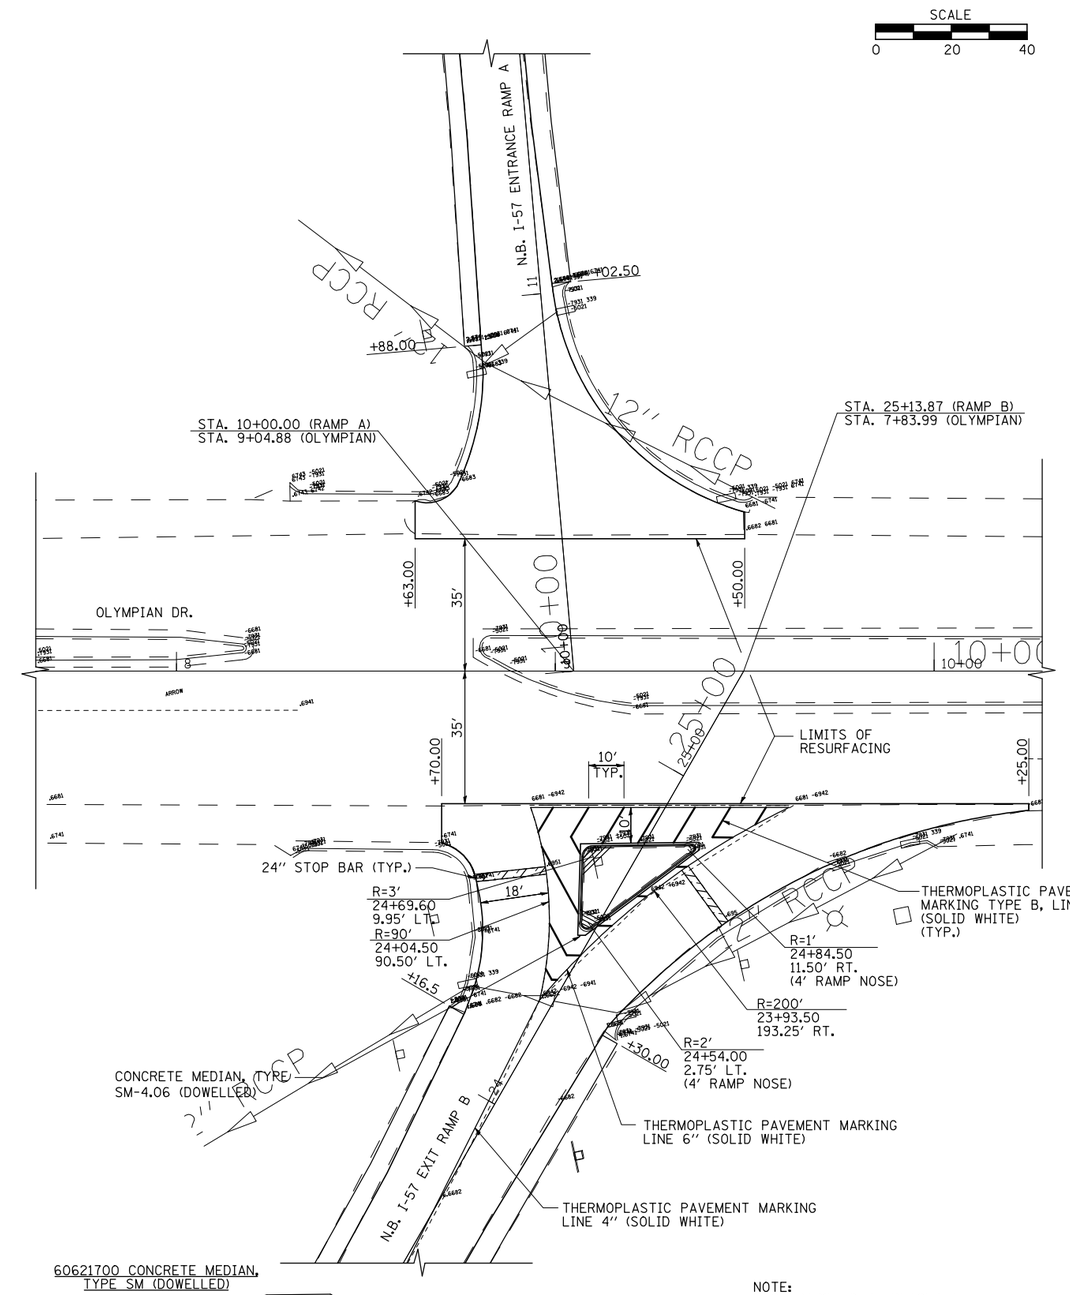
| LOCATION | TON |
|---|---|
| RAMP D | 12.6 |
| RAMP B | 35.0 |
| | 47.6 |

60621700 CONCRETE MEDIAN, TYPE SM (DOWELLED)

| LOCATION | TON |
|---|---|
| RAMP D | 123.0 |
| RAMP B | 379.5 |
| | 502.5 |

| | | | |
|---|---|---|---|
| FILE NAME = $FILEL$ | USER NAME = $USER$ | DESIGNED - | REVISED - |
| | | DRAWN - | REVISED - |
| | PLOT SCALE = $SCALE$ | CHECKED - | REVISED - |
| | PLOT DATE = $DATE$ | DATE - | REVISED - |

**STATE OF ILLINOIS**
**DEPARTMENT OF TRANSPORTATION**

**I-57/OLYMPIAN**
**INTERCHANGE DETAILS**

SCALE: | SHEET NO. 1 OF 2 SHEETS | STA. | TO STA.

| F.A.I RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 57 | (10-34, 10-35)RS-2(SB) | CHAMPAIGN | 66 | 37 |
| | | CONTRACT NO. 70923 | | |
| | | ILLINOIS FED. AID PROJECT | | |