CONTRACT NO. 68648

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
64	*	PEORIA	20	9
STA. 211+60.95		TO STA. 219+27.65		
FED. ROAD DIST. NO. 4	ILLINOIS	FED. AID PROJECT		

* 04 Bridge Repair 2007-2

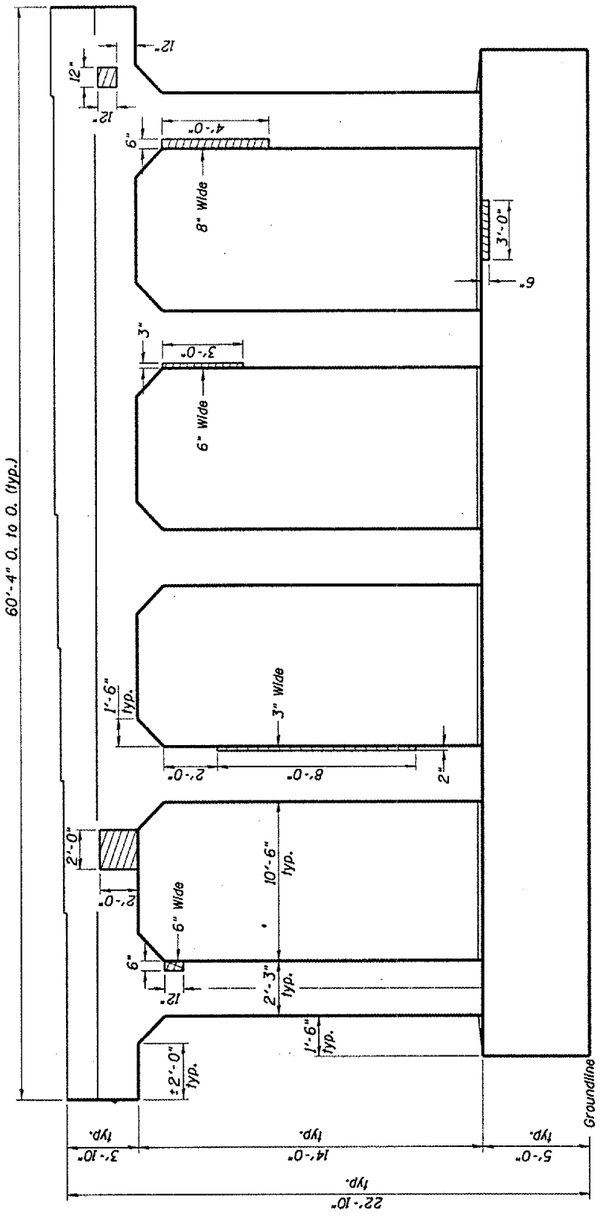

ELEVATION PIER 4
(Looking West)

ESTIMATED QUANTITIES

ITEM	UNIT	QUANTITY
Structural Repair of Concrete (≥5")	SQ.FT.	4.6
Structural Repair of Concrete (<5")	SQ.FT.	26

▨ Structural Repair of Concrete =/< 5"

▩ Structural Repair of Concrete > 5"

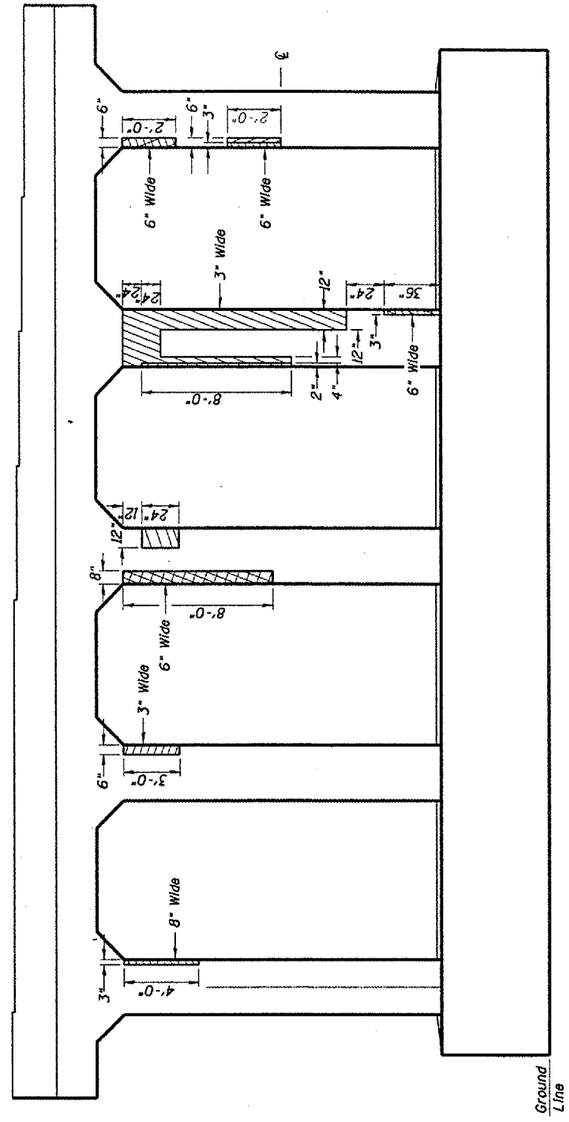

ELEVATION PIER 4
(Looking East)

ESTIMATED QUANTITIES

ITEM	UNIT	QUANTITY
Structural Repair of Concrete (≥5")	SQ.FT.	11.2
Structural Repair of Concrete (<5")	SQ.FT.	63.8

▨ Structural Repair of Concrete =/< 5"

▩ Structural Repair of Concrete > 5"

SN.072-0012 Adams St.over Clark St. & B.N.R.R.

REVISIONS NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION

STRUCTURAL REPAIR DETAILS

SCALE: VERT.
HORIZ.

DATE 06-16-2005

DRAWN BY CEJ

CHECKED BY

PLOT DATE = %DATE%
FILE NAME = %FILE%
PLOT SCALE = %SCALE%
REFERENCE = %REF%