HORIZONTAL CONTROL

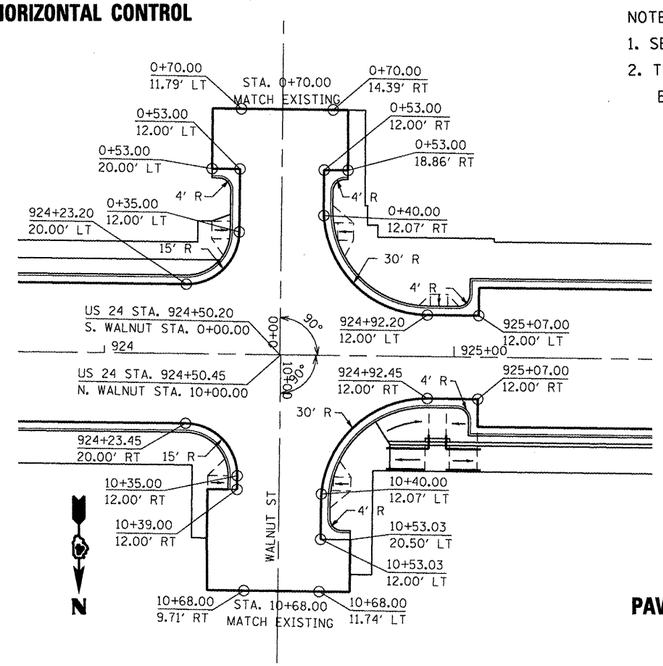

NOTES:

1. SEE SIDEROAD PROFILES.
2. TYPICAL TRANSVERSE JOINT SPACING ON US 24 BETWEEN INTERSECTIONS SHALL BE 14'.

VERTICAL CONTROL

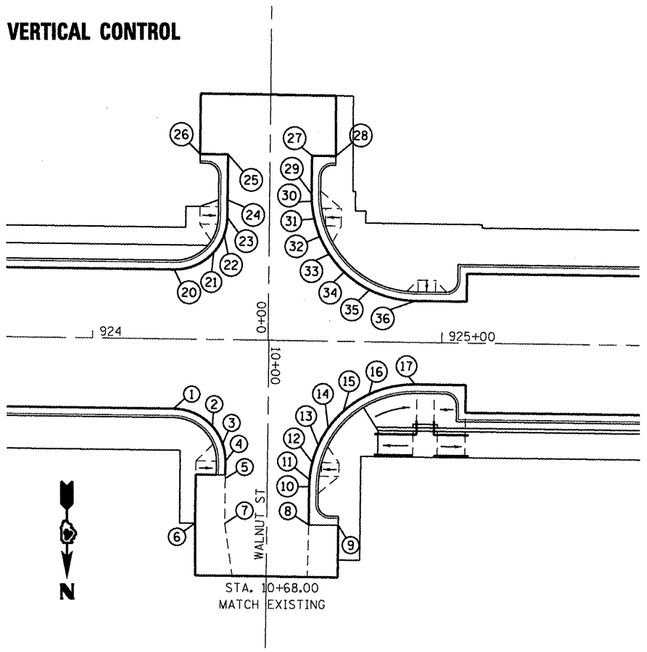

PAVEMENT JOINTS

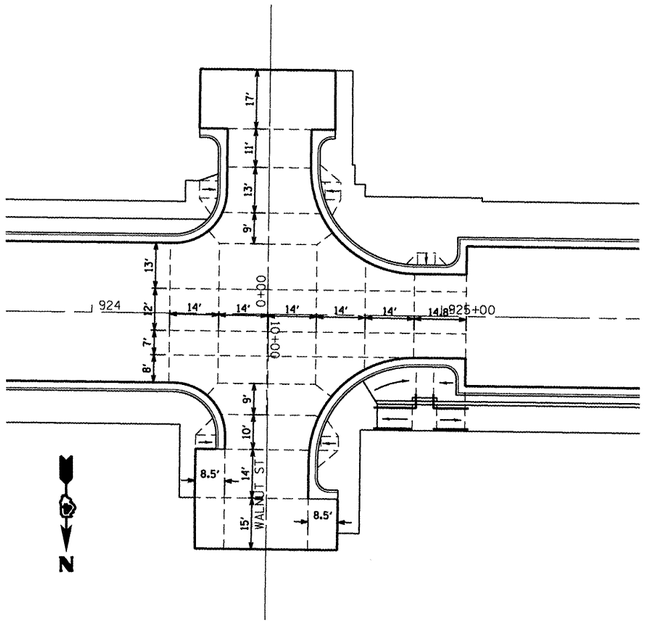

0' 20' 40'
SCALE

LOCATION	STATION	OFFSET	ELEVATION
N. WALNUT ST			
1	10+20.00	27.00	712.09
2	10+25.00	15.82	712.30
3	10+30.00	12.86	712.46
4	10+35.00	12.00	712.51
5	10+40.00	12.00	712.54
6	10+53.03	20.44	712.75
7	10+53.03	12.00	712.61
8	10+53.03	12.00	712.73
9	10+53.03	20.50	712.85
10	10+42.00	12.00	712.69
11	10+40.00	12.07	712.68
12	10+35.00	12.83	712.65
13	10+30.00	14.50	712.62
14	10+25.00	17.28	712.53
15	10+20.00	21.60	712.46
16	10+15.00	28.92	712.39
17	10+12.00	42.00	712.36

LOCATION	STATION	OFFSET	ELEVATION
S. WALNUT ST			
20	0+20.00	27.00	712.09
21	0+25.00	15.82	712.04
22	0+30.00	12.86	712.01
23	0+35.00	12.00	711.91
24	0+40.00	12.00	711.80
25	0+53.00	12.00	711.66
26	0+53.00	20.00	711.79
27	0+53.00	12.00	711.66
28	0+53.00	18.86	711.83
29	0+42.00	12.00	711.78
30	0+40.00	12.07	711.80
31	0+35.00	12.83	711.87
32	0+30.00	14.50	711.94
33	0+25.00	17.28	712.01
34	0+20.00	21.60	712.09
35	0+15.00	28.92	712.13
36	0+12.00	42.00	712.30

FILE NAME = miscsheets.dgn	USER NAME = dickhaussn	DESIGNED -	REVISED -
		DRAWN -	REVISED -
	PLOT SCALE = 40.0000 ' / in.	CHECKED -	REVISED -
	PLOT DATE = 3/9/2012	DATE -	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

INTERSECTION DETAILS
WALNUT STREET

SCALE: | SHEET NO. OF SHEETS | STA. | TO STA.

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
317	16W-1, RS-3	FULTON	347	145
		CONTRACT NO. 88795		
		ILLINOIS FED. AID PROJECT		