COUNTY HIGHWAY	FISCAL YEAR	TOTAL SHEETS	SHEET NO.
FAU 2615	2008	25	7
SEC. 07-00232-05-TL			DU PAGE CO

LOCATION 1 SYSTEM MAP

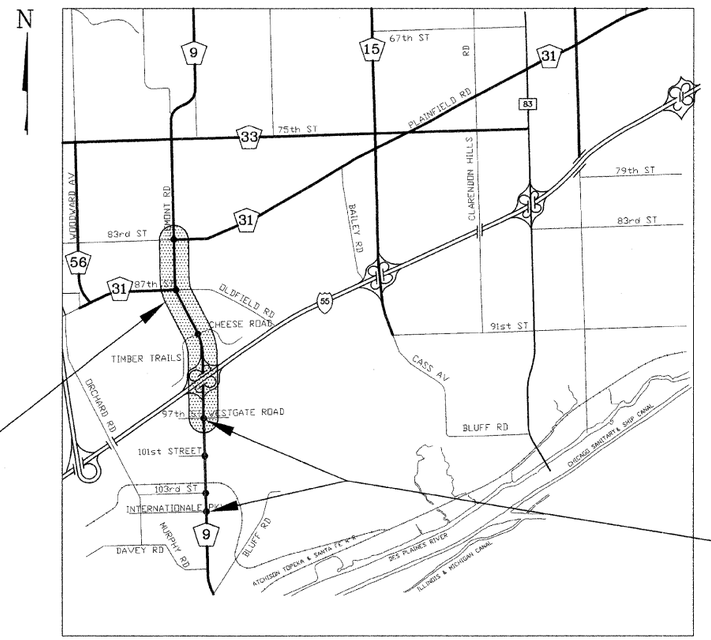

PROJECT SITE

EXISTING ECONOLITE SIGNAL SYSTEM

LOCATION 1 SCHEDULE OF QUANTITIES

PAY CODE NUMBER	PAY ITEM	UNIT	TOTAL QUANTITIES	LEMONT ROAD INTERCONNECT	LEMONT RD & 97TH ST/WESTGATE RD	LEMONT RD & TIMBER TR/CHEESE RD	LEMONT RD & 87TH ST	LEMONT RD & 83RD ST
81000600	CONDUIT IN TRENCH, 2" DIA., GALVANIZED STEEL	FOOT	**6429**	6429				
81018500	CONDUIT PUSHED, 2" DIA., GALVANIZED STEEL	FOOT	**1953**	1953				
81400100	HANDHOLE	EACH	**14**	14				
81400200	HEAVY-DUTY HANDHOLE	EACH	**7**	7				
81400200	TRENCH AND BACKFILL FOR ELECTRICAL WORK	FOOT	**6429**	6429				
87301305	ELECTRIC CABLE IN CONDUIT, LEAD-IN, NO. 14 1 PAIR	FOOT	**750**		750			
X0322925	ELECTRIC CABLE IN CONDUIT, TRACER, NO. 14 1C	FOOT	**10329**	10329				
X8710020	FIBER OPTIC CABLE IN CONDUIT, NO. 62.5/125, MM12F SM12F	FOOT	**10329**	10329				
87900200	DRILL EXISTING HANDHOLE	EACH	**6**		1	2	2	1
88500100	INDUCTIVE LOOP DETECTOR	EACH	**2**		2			
88600100	DETECTOR LOOP, TYPE 1	FOOT	**180**		180			
89502375	REMOVE EXISTING TRAFFIC SIGNAL EQUIPMENT	EACH	**1**		1			
89501400	RELOCATE EXISTING EMERGENCY VEHICLE PRIORITY SYSTEM, DETECTOR UNIT	EACH	**1**		1			
89501410	RELOCATE EXISTING EMERGENCY VEHICLE PRIORITY SYSTEM, PHASING UNIT	EACH	**1**		1			
X8050015	SERVICE INSTALLATION - POLE MOUNTED	EACH	**1**		1			
X0325705	RE-OPTIMIZE TRAFFIC SIGNAL SYSTEM LEVEL 2	L SUM	**0.5**	0.5				

REVISIONS	
NAME	DATE

DUPAGE COUNTY DIVISION OF TRANSPORTATION

LEMONT ROAD
SUMMARY OF QUANTITIES

SCALE: NONE

DATE: 8/21/08

DRAWN BY: TH
DESIGNED BY: TH
CHECKED BY: DAZ